



DEPARTMENT OF THE ARMY
US ARMY INSTALLATION MANAGEMENT COMMAND
HEADQUARTERS, UNITED STATES ARMY GARRISON
4551 LLEWELLYN AVENUE SUITE 5000
FORT GEORGE G. MEADE, MARYLAND 20755-5000

June 26, 2014

Environmental Division

Ed Carlson
Solid Waste Program
Maryland Department of the Environment
1800 Washington Boulevard
Baltimore, Maryland 21230

Dear Mr. Carlson:

Enclosed please find the *June 2014 Annual Monitoring Report for FGGM-17, Closed Sanitary Landfill, Fort George G. Meade, Maryland* (Report). The Report provides the results of the March 2014 sampling event along with historical data.

Copies of this Report have been furnished to John Burchette (U.S. Environmental Protection Agency), Mick Butler (Fort George G. Meade), Francis Coulters (U.S. Army Environmental Command), Elisabeth Green (Maryland Department of Environment), and the Fort George G. Meade Restoration Advisory Board.

If you have any questions please feel free to contact Denise Tegtmeyer at (301) 677-9559 or me at (301) 677-7999.

Sincerely,

A handwritten signature in black ink, appearing to read "G. B. Knight".

George B. Knight, PG
Acting Program Manager, Installation Restoration
Program
Directorate of Public Works-Environmental Division


Enclosure



Annual Monitoring Report


FGGM 17, Closed Sanitary Landfill Fort George G. Meade, Maryland

June 2014

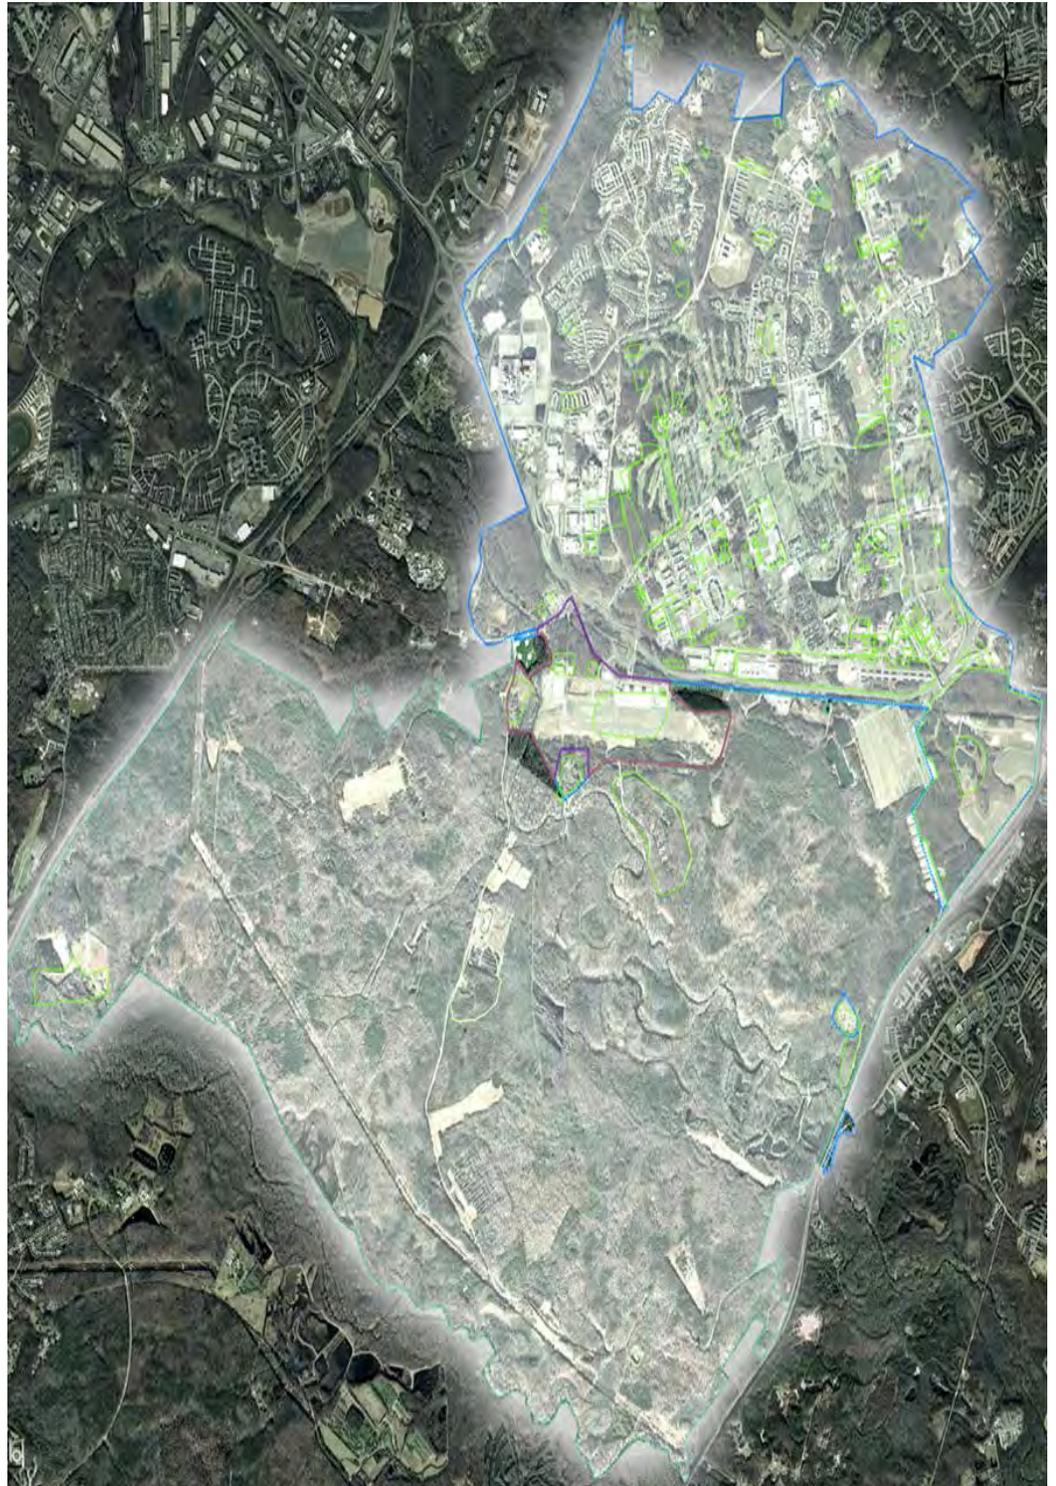



Keith Shepherd
Task Manager



Brian R. Stempowski, P.E., PMP
Phase Manager



Timothy Llewellyn
Project Manager

Annual Monitoring Report

FGGM-17, Closed Sanitary
Landfill, Fort George G. Meade,
Maryland

Prepared for:
U.S. Army

Prepared by:
ARCADIS U.S., Inc.
1114 Benfield Boulevard
Suite A
Millersville
Maryland 21108
Tel 410.987.0032
Fax 410.987.4392

Our Ref.:
GP09MEAD.CSL0

Date:
June 2014

This document is intended only for the use of the individual or entity for which it was prepared and may contain information that is privileged, confidential and exempt from disclosure under applicable law. Any dissemination, distribution or copying of this document is strictly prohibited.

Table of Contents

Executive Summary	ES-1
1. Introduction	1
2. Environmental Setting	2
2.1 Background	2
2.2 Climate	2
2.3 Topography	2
2.4 Surface Water	3
2.5 Geology	4
3. Monitoring Program	6
3.1 Well Gauging	6
3.2 Groundwater Sampling	7
3.2.1 Purge Methodology	7
3.2.2 Sampling Methodology	7
3.3 Surface Water Sampling	7
3.4 Quality Assurance/Quality Control and Sample Identification	8
3.4.1 Data Validation	8
3.5 Investigative Derived Waste Management	9
3.5.1 Purge Water	9
3.5.2 Solid Waste	9
4. Chemical Results - Groundwater	10
4.1 Upper Patapsco Aquifer	10
4.1.1 Summary of Detections	10
4.1.2 Summary of Exceedances above Maximum Contaminant Levels and Secondary Maximum Contaminant Levels	11
4.2 Lower Patapsco Aquifer	12
4.2.1 Summary of Detections	12

Table of Contents

4.2.2	Summary of Exceedances above Maximum Contaminant Levels and Secondary Maximum Contaminant Levels	13
5.	Chemical Results – Surface Water	15
6.	Statistical Analysis	16
6.1	Statistical Procedure	16
6.2	Data Preparation	18
6.3	Statistical Results for the Upper Patapsco	19
6.4	Statistical Results for the Lower Patapsco	20
6.5	Observations and Interpretation	21
8.	References	26

Tables

1	Summary of Detection Monitoring Parameters
2	Summary of Assessment Monitoring Parameters
3	Summary of Analytical Methods
4	Monitoring Well Network
5	Upper Patapsco Aquifer Positive Detections
6	Upper Patapsco Aquifer Detections Above Maximum Contaminant Levels
7	Upper Patapsco Aquifer Detections Above Secondary Maximum Contaminant Levels
8	Lower Patapsco Aquifer Positive Detections
9	Lower Patapsco Aquifer Detections Above Maximum Contaminant Levels
10	Lower Patapsco Aquifer Detections Above Secondary Maximum Contaminant Levels
11	Surface Water Positive Detections
12	Statistical Analysis of Metals Data – Upper Patapsco Aquifer
13	Statistical Analysis of Inorganic Data – Upper Patapsco Aquifer

Table of Contents

14	Statistical Analysis of Volatile Organic Compounds – Upper Patapsco Aquifer
15	Statistical Analysis of Semi-Volatile Organic Compounds – Upper Patapsco Aquifer
16	Statistical Results of Metals Data – Lower Patapsco Aquifer
17	Statistical Results of Inorganic Data – Lower Patapsco Aquifer
18	Statistical Results of Volatile Organic Compounds – Lower Patapsco Aquifer

Figures

1	Location Map Closed Sanitary Landfill
2	Site Map Closed Sanitary Landfill
3	Groundwater Elevations Upper Patapsco Aquifer - March 2014 Closed Sanitary Landfill
4	Groundwater Elevations Lower Patapsco Aquifer - March 2014 Closed Sanitary Landfill
5	Benzene Concentrations (ug/L) Upper Patapsco Aquifer - March 2014 Closed Sanitary Landfill
6	Arsenic Concentrations (ug/L) Upper Patapsco Aquifer - March 2014 Closed Sanitary Landfill
7	Historical Arsenic Concentrations in the Upper Patapsco Aquifer
8	Historical Benzene Concentrations in the Upper Patapsco Aquifer
9	Historical Tetrachloroethene Concentrations in the Lower Patapsco Aquifer

Appendices

A	Purge and Sample Records, Chain of Custody Forms
B	Aquifer Characteristics and Flow Regime Data
C	QA/QC data (on CD)
D	Data Validation Reports (on CD)
E	Analytical Results (on CD)

Table of Contents

- F Descriptive Statistics of Cumulative Data (on CD)
- G Statistical Analysis of Groundwater Data (on CD)
- H Complete CSL Monitoring Results, 1994-2014 (on CD)

List of Acronyms and Abbreviations

°F	degree Fahrenheit
ARCADIS	ARCADIS U.S., Inc.
Coastal Plain	Coastal Plain physiographic province
COC	constituent of concern
CSL	Closed Sanitary Landfill
FGGM	Fort George G. Meade
ft	feet
ID	Identification
IDW	investigative derived waste
LPA	Lower Patapsco Aquifer
MCL	maximum contaminant level
MDL	method detection limit
MDE	Maryland Department of the Environment
mg/L	milligrams per liter
msl	mean sea level
PCE	Tetrachloroethene
Piedmont	Piedmont physiographic province
QA/QC	quality assurance/quality control
RCRA	Resource Conservation and Recovery Act
SAP	Sampling and Analysis Plan
SMCL	secondary maximum contaminant level
SVOC	semi-volatile organic compound
t.o.n.	threshold odor number
µg/L	micrograms per liter
UPA	Upper Patapsco Aquifer
URS	URS Group Inc.
USEPA	United States Environmental Protection Agency
VOC	volatile organic compound
WMP	Waste Management Plan

Annual Monitoring Report

FGGM-17 Closed Sanitary Landfill, Fort George G. Meade

Executive Summary

This report presents the results of the annual groundwater and surface water monitoring completed at the Closed Sanitary Landfill (CSL) (FGGM-17) at Fort George G. Meade (FGGM) in Anne Arundel County, Maryland in March 2014. The FGGM CSL is located in the southeastern portion of the base, south of U.S. Route 32 and west of the Amtrak railroad right of way. Cell 1 covers approximately 46 acres and Cell 2 covers 24 acres. A third area that lacks topographic expression is referred to informally as Cell 3, but is not a defined disposal area.

ARCADIS U.S., Inc. (ARCADIS) performed all work in accordance with Contract No.W91ZLK-05-D-0015 Task Order 0005 between ARCADIS and the United States Army Environmental Command. Under regulatory guidance including Federal regulations, 40 Code of Federal Regulations Part 258 and state regulations, Code of Maryland Regulation Title 26 Subtitle 04, a detection and assessment monitoring program is required at the CSL. The field effort was conducted between 18 March and 28 March 2014 and included a comprehensive water-level survey and groundwater sampling and analysis for constituents of concern (COCs). A total of 26 monitoring wells were sampled during the annual event.

In samples collected from Upper Patapsco Aquifer (UPA) wells, 23 metals were detected. Four metals (arsenic, cadmium, chromium, and lead) were detected at concentrations exceeding their respective maximum contaminant level (MCL). Twenty-five volatile organic compounds (VOCs) were detected in 12 samples from UPA wells, and 15 of 25 VOCs detected were chlorinated compounds. Benzene was the only VOC detected above its MCL. All other metals and VOCs detected were below MCLs.

In samples from Lower Patapsco Aquifer (LPA) wells, seven VOCs were detected in four samples. Tetrachloroethene and carbon tetrachloride were the only VOC constituents detected above their respective MCL. Beryllium and lead were the only metals detected above their respective MCLs.

Three surface water samples were collected during the March 2014 monitoring event. No metals were detected at concentrations that exceeded State of Maryland Water Quality Criteria. One VOC, acetone, was detected in the sample at SW02 at a concentration below the State of Maryland Water Quality Criteria.

An Addendum to the CSL Monitoring Plan dated 20 June 2012 was prepared in response to comments dated 6 April 2012 from the Maryland Department of the

**Semi-Annual
Monitoring Report**

FGGM-17 Closed Sanitary
Landfill, Fort George G.
Meade

Environment (MDE) that agreed to the reduction of monitoring frequency of the ten deep LPA wells from semi-annual to annual. Deep LPA groundwater monitoring wells will continue to be monitored on an annual basis moving forward. The correspondence from MDE dated April 6, 2012 also noted that once a corrective action has been approved for Operable Unit 4 / LPA, a request to discontinue monitoring of the deep LPA wells under the CSL Monitoring Program will be re-evaluated. The revised CSL Monitoring Plan reflecting these changes was submitted on 25 February 2013.

Annual Monitoring Report

FGGM-17 Closed Sanitary
Landfill, Fort George G.
Meade

1. Introduction

This report presents the results of the annual groundwater and surface water monitoring completed at the Closed Sanitary Landfill (CSL) (FGGM-17) at Fort George G. Meade (FGGM) in Anne Arundel County, Maryland in March 2014. ARCADIS U.S., Inc. (ARCADIS) performed all work in accordance with Contract No.W91ZLK-05-D-0015 Task Order 0005 between ARCADIS and the United States Army Environmental Command. Under regulatory guidance including Federal regulations, 40 Code of Federal Regulations Part 258 and state regulations, Code of Maryland Regulation Title 26 Subtitle 04, a detection and assessment monitoring program is required at the CSL. The field effort was conducted between 18 March and 28 March 2014 and included a comprehensive water-level survey and groundwater sampling and analysis for constituents of concern (COCs). A total of 26 monitoring wells were sampled during the annual event.

2. Environmental Setting

2.1 Background

FGGM is located approximately midway between Washington, D.C. and Baltimore, Maryland in Anne Arundel County, Maryland, as illustrated on the regional map in **Figure 1**. The FGGM CSL is located in the southeastern portion of the base, south of U.S. Route 32 and west of the Amtrak railroad right of way. Cell 1 covers approximately 46 acres and Cell 2 covers 24 acres. A third area that lacks topographic expression is referred to informally as Cell 3, but is not a defined disposal area. Other features in the vicinity of the landfill include surface water retention ponds along a small stream flowing from east to west that bisects the site. A landfill-gas collection and treatment system operates along the eastern edge of the landfill cells to control emissions from the site. Much of the Site, outside of the landfill cells, is wooded and there are several areas identified as wetlands. The Site map for the CSL is provided as **Figure 2**.

2.2 Climate

The climate at FGGM is variable and influenced by the Chesapeake Bay and the Atlantic Ocean to the east and the Appalachian Mountains to the west. The winter weather in the area is influenced primarily by cold, dry, continental-polar winds from the west and northwest, and less frequent maritime-tropical winds from the south and southwest that bring warm, often humid, air to the region. During the summer, the dominance of these two air masses is reversed, and warm, humid weather dominates.

Local weather data are compiled by the National Oceanic and Atmospheric Administration's Climatic Data center for the Baltimore-Washington Thurgood Marshall International Airport weather station. Annual precipitation averages about 40 inches per year. The distribution of precipitation is essentially even throughout the year, although slightly lower averages are posted for the summer months. Historical average monthly precipitation ranges between 2.8 and 3.5 inches for all months. The annual mean daily temperature for the FGGM area is 61 degrees Fahrenheit (°F), with a daily annual maximum of 72°F and minimum of 45°F. Annual temperature extremes vary from -6 to 101°F.

2.3 Topography

FGGM is located in the Coastal Plain physiographic province (Coastal Plain), which is characterized by low-rolling uplands and low-gradient streams. The ground elevation

at FGGM generally ranges between 150 and 250 feet (ft) above mean sea level (msl). Ground elevation surveyed at monitoring well locations ranges from 135 to 177 ft above msl.

2.4 Surface Water

FGGM is almost entirely located within the Patuxent River watershed, which is one of the primary drainage systems in Anne Arundel County. The extreme northeastern portion of FGGM is within the Severn River drainage basin. The Patuxent River watershed encompasses approximately 932 square miles and comprises eight sub-basins from north to south:

- Brighton Dam
- Middle Patuxent River
- Little Patuxent River
- Rocky Gorge Dam
- Patuxent River Upper
- Western Branch
- Patuxent River Middle
- Patuxent River Lower

FGGM is predominantly located within the Little Patuxent River sub-basin. Several streams drain FGGM within the Little Patuxent River sub-basin. The streams are, from west to east:

- Little Patuxent River
- Midway Branch
- Franklin Branch

The only significant lake/reservoir present on FGGM is Burba Lake (formerly called Kelly Pool).

At the CSL, there are surface water retention ponds. There is also a small stream flowing from east to west that bisects the Site displayed on **Figure 2**. The unnamed stream enters the east side of the CSL from a culvert under the Amtrak right of way and flows westward through a retention pond between landfill Cells 1 and 2, through wooded wetlands and a retention pond, and exits the Site flowing westward into ponds adjacent to Range Road.

2.5 Geology

FGGM is located just within the western boundary of the Coastal Plain. The Coastal Plain geology is characterized by a wedge of unconsolidated Cretaceous and Quaternary alluvial sediments (unconsolidated sands, silts and clays) that dip and thicken toward the Atlantic Ocean.

West of the Coast Plain is the Piedmont physiographic province (Piedmont), comprising igneous and metamorphic rocks. The boundary between the Piedmont and Coastal Plain is termed the "Fall Line," after falls and rapids were found where streams cross this boundary. The Fall Line is located near the western Anne Arundel County line, immediately west of FGGM.

Quaternary- and Cretaceous-aged unconsolidated deposits are exposed at the surface at FGGM. These deposits have a total thickness of about 700 ft at FGGM (URS Group Inc. [URS], 2003) and are underlain by bedrock consisting of Precambrian crystalline rock composed predominately of gabbro, gneiss and schist. The unconsolidated deposits from youngest to oldest consist of:

- Quaternary alluvium and Patuxent River terraces
- Patapsco Formation
- Arundel Clay
- Patuxent Formation

The Patuxent Formation is exposed at the surface west of FGGM, the Arundel Clay crops out over the western portion of FGGM, and the Patapsco Formation crops out over the central and eastern portions of FGGM. Quaternary alluvium and river terrace deposits locally overlay the Potomac Group near the Patuxent and Little Patuxent Rivers.

Annual Monitoring Report

FGGM-17 Closed Sanitary Landfill, Fort George G. Meade

Coastal Plain groundwater predominantly occurs within the following three major Potomac Group aquifers which underlie FGGM:

- Upper Patapsco
- Lower Patapsco
- Patuxent

The upper and lower portions of the Patapsco Formation are locally separated by the Middle Patapsco. Similarly, the Arundel Formation acts as a confining layer that separates the Patuxent Formation from the Lower Patapsco Formation. Extensive and on-going hydrogeological investigations in the southeast corner of FGGM have documented the Middle Patapsco clay as thick and continuous beneath the CSL occurring at depths between approximately 40 to 50 ft below ground surface. The Middle Patapsco clay is approximately 60 to 80 ft in thickness with the Lower Patapsco aquifer occurring beneath it.

3. Monitoring Program

The CSL monitoring program includes 26 monitoring wells. In accordance with the CSL Monitoring Plan dated 25 February 2013, 16 monitoring wells screened in the Upper Patapsco Aquifer (UPA) are sampled semi-annually and ten monitoring wells screened in the Lower Patapsco Aquifer (LPA) are sampled annually. During the March 2014 monitoring event, groundwater samples were collected between 18 March and 28 March 2014. Groundwater parameters monitored under Detection Monitoring and Assessment Monitoring are provided in **Tables 1** and **2**, respectively. **Table 3** presents a summary of analytical methods used during the semi-annual sampling at CSL.

All purging and sampling activities were completed in accordance with procedures outlined in Standard Operating Procedure E.7 – Low-flow Groundwater Purging and Sampling Procedures for Monitoring Wells provided in Appendix A of the FGGM Sampling and Analysis Plan (SAP) (ARCADIS, 2010a). Field parameter measurements, purging observations, sampling methods and materials, sampling personnel, and bottle requirements were recorded on Groundwater Sampling Forms, which are presented in **Appendix A**.

3.1 Well Gauging

The 26 monitoring wells included in the CSL sampling program were gauged for groundwater elevations prior to sampling activities commencing. Water-level measurements were collected using an electronic water level indicator and measurements were recorded on a Water-Level Measurement Form. Water-level measurements were referenced to a surveyed elevation point located on the top of the well casing. Water levels were measured at least two times to check the reproducibility of the measurement data and ensure accuracy before the measurements were recorded. Monitoring well locations, top of well casing elevations, depth to water readings, and groundwater elevations are presented in **Table 4**. Groundwater elevation contour maps for the UPA and LPA are presented as **Figures 3 and 4**, respectively.

Table B-1 in **Appendix B** provides a comparison of the groundwater elevations in March 2014 to the elevations measured in September 2013. Water levels in all UPA wells increased, ranging between 0.05 ft (MW7S) and 2.16 ft (MW20), except in MW105 where the water level decreased by 0.14 ft. Water levels in all the LPA wells decreased, ranging between 0.28 ft (MW13D) and 0.77 ft (MW109D).

3.2 Groundwater Sampling

3.2.1 Purge Methodology

Groundwater samples were collected in accordance with United States Environmental Protection Agency (USEPA) Region III low-flow groundwater purging methodology (USEPA, 1997). To ensure that representative formation water was being sampled, monitoring wells were purged and sampled using a submersible pump and polyethylene tubing. The submersible pump intake was placed mid-screen. In addition, all non-dedicated equipment and materials were decontaminated prior to and after introduction into each of the monitoring wells.

During well purging, field parameters were monitored using a water quality meter with a flow-through cell. These field parameters included pH, specific conductance, turbidity, dissolved oxygen, temperature, and oxidation-reduction potential. Upon stabilization, groundwater samples were collected through the sample tubing.

3.2.2 Sampling Methodology

All groundwater samples were collected directly from the discharge point of the sample tubing connected to the submersible pump. Groundwater samples were preserved, labeled, recorded on a Chain of Custody, and packed on ice for shipment to Shealy Laboratories in West Columbia, South Carolina, for analytical methods identified in **Table 3**. For quality assurance/quality control (QA/QC) purposes, two duplicate samples were collected, and one trip blank was included in each cooler shipped for volatile organic compound (VOC) analysis. One matrix spike and matrix spike duplicate were also collected.

3.3 Surface Water Sampling

Three surface water samples were collected during the March 2014 monitoring event from the sampling stations (SW01, SW02 and SW03) along the stream that crosses the Site. The unnamed stream enters the east side of the CSL from a culvert under the Amtrak right of way and flows westward through a retention pond between landfill Cells 1 and 2, through wooded wetlands and a retention, and exits the Site flowing westward into ponds adjacent to Range Road. The upstream monitoring point SW01 is in the ditch below the railroad embankment along the eastern boundary of the landfill. Surface water sampling location SW02 is the outfall from the retention pond between landfill Cells 1 and 2. Surface water sampling location SW03 is located at the culvert beneath Magazine Road where the stream crosses the western boundary of the Site.

Surface water samples were collected by submerging an unpreserved bottle and pouring that water into the respective pre-preserved bottles. At location SW-1, a thin ice layer was noted during sample collection. In order to collect the surface water sample, the ice was broken and the sample was collected according to normal procedures. When water flow is sufficient at SW02 and SW03 each bottle is filled directly from the outfall. Similar to groundwater sample collection, the surface water VOC sample is collected first, followed by the other parameters in the order of decreasing volatility.

3.4 Quality Assurance/Quality Control and Sample Identification

In accordance with the FGGM Quality Assurance Project Plan (ARCADIS, 2010b), additional samples were collected for QC analysis at the rate of 1 per 20 field samples. Duplicate samples were collected at MW17 and MW110D. One matrix spike and matrix spike duplicate was also collected at MW108D. Daily equipment rinse blanks were also submitted with the groundwater samples each day that non-dedicated sampling equipment was used. Trip blanks were included with any sample cooler containing VOC samples.

Field sample nomenclature was conducted in accordance with the FGGM SAP (ARCADIS, 2010a). Specifically, sample identifications (IDs) were modified to include FM17, an abbreviation for the CSL Site. In addition to the site abbreviation and monitoring well ID, the date the sample was collected is also included in the sample ID in parenthesis. For example, FM17MW4S(032014) would be the ID for the sample collected at well MW4S if it was sampled on 20 March 2014.

The analytical results for all QA/QC samples (i.e., trip blanks and equipment blanks) collected are provided in **Appendix C**. Table C-1 presents a summary of abbreviations, laboratory flags, data validation flags, and data validation reason codes that provide additional information on the data qualifiers. Table C-2 is a summary of the QA/QC detections (the detections-only table) and Table C-3 is the comprehensive listing of all analytes for the QA/QC samples. Table C-4 presents detections above the reliable detection limits and method detection limits (MDLs) from samples collected from both aquifers.

3.4.1 Data Validation

All groundwater data collected during the March 2014 sampling event received level II data validation performed under USEPA guidelines by Laboratory Data Consultants, Inc. located in Carlsbad, California. The validation process establishes whether the data are usable for the intended purpose of evaluating conditions at the site.

The data validation process includes a review of QC data generated in both the field and the laboratory. Trip and equipment blanks provide information on potential sample contamination introduced in the field and in transit to the laboratory. Method blanks, which are generated in the laboratory, are used to assess such factors as the sensitivity, accuracy, reproducibility, and cleanliness. Validation includes reviewing holding times, daily laboratory calibration curves for the analytical instruments, spike recovery, and confirming laboratory standards are current. The validation concluded that the data are usable, as qualified, for the intended purpose of evaluating the groundwater and surface water at the CSL. The data validation reports for the March 2014 data are presented in **Appendix D**.

3.5 Investigative Derived Waste Management

All investigative derived waste (IDW) generated during the sampling event was managed in accordance with procedures outlined in the FGGM Waste Management Plan (WMP) (ARCADIS, 2010c).

3.5.1 Purge Water

Purge water and decontamination fluids were combined before being containerized. All waste was stored in 55-gallon Department of Transportation approved drums, properly labeled and staged in a secure location at the CSL. At the end of the sampling event, all IDW was relocated to the FGGM designated IDW storage area located at 2250 Rock Avenue pending offsite disposal.

3.5.2 Solid Waste

All personal protective equipment and disposable sampling equipment were collected in plastic trash bags and disposed of in accordance with the FGGM WMP (ARCADIS, 2010c).

4. Chemical Results - Groundwater

This section of the report presents analytical results for the March 2014 monitoring program and discusses the distribution of COCs in the UPA and LPA. To assess Site conditions, groundwater results were screened using USEPA Maximum Contaminant Levels (MCLs) and Secondary Maximum Contaminant Levels (SMCLs) for drinking water.

Laboratory analytical results are presented in three tables. UPA positive detections, detections above MCLs, and detections above SMCLs are presented in **Tables 5, 6, and 7**, respectively. LPA positive detections, detections above MCLs, and detections above SMCLs are presented in **Tables 8, 9, and 10**, respectively. Data qualifiers and laboratory abbreviations are provided in **Appendix C**. Full listings of the laboratory results for both aquifers are presented in **Appendix E**. Benzene and arsenic plume contour maps for the UPA are presented as **Figures 5 and 6**, respectively. Trend plots for arsenic and benzene in the UPA are presented as **Figures 7 and 8**, respectively. Tetrachloroethene (PCE) trend plots for the LPA are provided as **Figure 9**.

4.1 Upper Patapsco Aquifer

4.1.1 Summary of Detections

Positive detections in the UPA include pesticides, herbicides, metals, semi-volatile organic compounds (SVOCs), VOCs and miscellaneous parameters as shown on **Table 5**. Explosives were sampled at three UPA monitoring wells but all compounds were not detected above laboratory detection limits.

Pesticides and herbicides were detected at concentrations below MCLs in three groundwater samples. Three herbicides 2,4,5-TP, 2,4-D, and dichlorprop were detected in the sample from well MW19. Ten pesticides, 4,4-dichlorodiphenyltrichloroethane, aldrin, alpha-bhc, beta-bhc, delta-bhc, dieldrin, endosulfane II, endrin ketone, gamma-bhc, and gamma-chlordane, were detected at concentrations below their respective MCLs from the three monitoring wells (MW7S, MW12S, and MW19).

Twenty-three metals were detected in samples from the UPA wells. Four metals (arsenic, cadmium, chromium, and lead) were detected at concentrations exceeding their respective MCL as described in Section 4.1.2. Nine of these (barium, calcium, cobalt, iron, manganese, nickel, potassium, sodium, and zinc) are widespread and appear to be naturally occurring in the UPA. Ten metals (aluminum, antimony,

beryllium, copper, magnesium, mercury, selenium, silver, thallium, vanadium) were detected at concentrations below MCLs and were not widespread.

Three SVOCs were detected in one groundwater sample below their respective MCLs. 1,2-dichlorobenzene, 4-Methylphenol, and naphthalene were detected at the sample from MW19.

Twenty-five VOCs were detected in 12 samples from UPA wells, and 15 of 25 VOCs detected were chlorinated compounds. Benzene was the only VOC detected above its MCL as described in Section 4.1.2. All other VOCs detected were below MCLs.

4.1.2 Summary of Exceedances above Maximum Contaminant Levels and Secondary Maximum Contaminant Levels

The UPA analytical results were screened against MCLs and SMCLs, as shown on **Tables 6 and 7**, respectively. Six analytes exceeded their MCLs:

- Arsenic exceeded its MCL of 10 micrograms per liter ($\mu\text{g/L}$) in five samples at concentrations between 11 $\mu\text{g/L}$ (MW18) and 43 $\mu\text{g/L}$ (MW19).
- Benzene exceeded its MCL of 5 $\mu\text{g/L}$ in the sample from MW19 (11 $\mu\text{g/L}$).
- Cadmium exceeded its MCL of 5 $\mu\text{g/L}$ in the sample from MW14 (6.6 $\mu\text{g/L}$).
- Chromium exceeded its MCL of 100 $\mu\text{g/L}$ in the sample from MW14 (3000 $\mu\text{g/L}$). It should be noted that this chromium detection is a historical maximum. Chromium exceeded its MCL at MW14 for the first time during the Semi-annual Monitoring event completed September 2013 at a concentration of 270 $\mu\text{g/L}$. Data trends will continue to be evaluated during upcoming sampling events and increasing trends will be closely monitored as part of the Stastical analysis completed on each groundwater data set.
- Lead exceeded its MCL of 15 $\mu\text{g/L}$ in the sample from MW14 (16 $\mu\text{g/L}$).
- Nitrate exceeded its MCL of 10 $\mu\text{g/L}$ in the sample from MW13S (30 J $\mu\text{g/L}$).

Eight analytes exceeded their SMCLs:

- Aluminum exceeded its SMCL of 50 $\mu\text{g/L}$ at 14 locations, with concentrations ranging from 55 $\mu\text{g/L}$ (MW07S) to 2,600 $\mu\text{g/L}$ (MW14).

Annual Monitoring Report

FGGM-17 Closed Sanitary Landfill, Fort George G. Meade

- Chloride exceeded its SMCL of 250 milligrams per liter (mg/L) in the sample from MW19 (310 µg/L).
- Color exceeded its SMCL of 15 Color Units at three locations, with concentrations ranging from 20 Color Units (MW10S) to 600 Color Units (MW12S).
- Iron exceeded its SMCL of 300 µg/L at 13 locations, with concentrations ranging from 350 µg/L (MW105) to 150,000 µg/L (MW12S).
- Manganese exceeded its SMCL of 50 µg/L at 13 locations, with concentrations ranging from 60 µg/L (MW105) to 2,000 µg/L (MW12S).
- Sulfate exceeded its SMCL of 250 mg/l in the sample from MW12S (270 mg/L).
- Odor exceeded its SMCL of 3 threshold odor number (t.o.n.) at five locations, with concentrations ranging from 3.64 t.o.n. (MW07S) to 8.75 t.o.n. (MW19).
- Total Dissolved Solids exceeded its SMCL of 500 mg/L in the sample from MW19 (1,200 mg/L).

4.2 Lower Patapsco Aquifer

4.2.1 Summary of Detections

Positive detections in samples from the LPA include metals, pesticides, VOCs and miscellaneous parameters.

Eleven pesticides, 4,4- dichlorodiphenyldichloroethylene, 4,4- dichlorodiphenyldichloroethane, 4,4- dichlorodiphenyltrichloroethane, alpha-chlordane, beta-bhc, delta-bhc, endosulfan I, endosulfan II, endosulfan sulfate, endrin, and gamma-chlorodane, were detected in the sample from MW13D. No pesticides or herbicides were detected above their respective MCLs.

Twenty-three metals were detected in the LPA samples. Aluminum, barium, beryllium, calcium, cobalt, copper, manganese, nickel, potassium, sodium, and zinc were widespread in the LPA including the upgradient wells MW4DR and MW7D, suggesting these metals are naturally occurring in the aquifer.

Seven VOCs were detected in four samples from LPA wells. PCE and carbon tetrachloride were the only VOC constituents detected above their respective MCL (see

section 4.2.2). All other detected VOCs were at concentrations below their respective MCLs.

4.2.2 Summary of Exceedances above Maximum Contaminant Levels and Secondary Maximum Contaminant Levels

The LPA groundwater results were screened against MCLs and SMCLs as shown on **Tables 9 and 10**, respectively. Four analytes detected in samples from LPA wells exceeded their MCLs:

- Two samples (MW7D and MW109D) had metals that exceeded their respective MCLs. Beryllium exceeded its MCL of 4 µg/L in the sample from MW7D at a concentration of 5.2 µg/L. Lead exceeded its MCL of 15 µg/L in the sample from MW109D at a concentration of 44 µg/L.
- Carbon Tetrachloride exceeded its MCL of 5 µg/L in the sample from MW4DR detected at a concentration of 8.6 µg/L.
- PCE exceeded its MCL of 5 µg/L in the sample from MW101D detected at a concentration of 29 µg/L.

Eight analytes detected in samples from the LPA exceeded their SMCLs:

- Aluminum exceeded its SMCL of 50 µg/L in nine wells with concentrations ranging from 78 µg/L (MW12D) to 5,900 µg/L (MW109D).
- Chloride exceeded its SMCL of 250 mg/L in the sample from MW109D detected at a concentration of 470 mg/L.
- Color exceeded its SMCL of 15 color units in the sample from MW109D detected at a concentration of 60 color units.
- Iron exceeded its SMCL of 300 µg/L in six wells, with concentrations ranging from 810 µg/L (MW12D) to 8,500 µg/L (MW10D).
- Manganese exceeded its SMCL of 50 µg/L from seven wells, with concentrations ranging from 71 µg/L (MW13D) to 470 µg/L (MW10D).
- Odor exceeded its SMCL of 3 t.o.n. in the sample from MW10D detected at a concentration of 5.25 t.o.n.

Annual Monitoring Report

FGGM-17 Closed Sanitary
Landfill, Fort George G.
Meade

- Total Dissolved Solids exceeded its SMCL of 500 mg/L in the sample from MW109D detected at a concentration of 800 mg/L.

5. Chemical Results – Surface Water

Three surface water samples were collected from the unnamed stream. **Table 11** presents positive surface water detections from samples collected during the March 2014 sampling event. Surface water analytical tables are included in **Appendix E**. Surface water analytical results were screened against State of Maryland Chronic Ambient Water Quality Criteria for Fresh Water and State of Maryland Water Quality Criteria for Human Health for Consumption of Drinking Water.

Three anions (chloride, nitrogen [nitrate], and sulfate) were detected in the surface water. Nineteen metals (aluminum, antimony, arsenic, barium, beryllium, calcium, chromium, cobalt, copper, iron, lead, magnesium, manganese, nickel, potassium, selenium, sodium, vanadium, and zinc) were detected in the surface water samples. No metals were detected above the Maryland Water Quality Criteria.

One VOC, acetone, was detected in the sample collected at SW02 at a concentration of 4.7 µg/L.

6. Statistical Analysis

The analytical data were analyzed statistically with a focus as to how the groundwater quality was changing over time. The historic database included data for 247 analytes in 26 monitoring wells in semi-annual monitoring events dated back to 1994. Previous statistical analyses have divided the data into four groups, three of which were in the Upper Patapsco and one group for all Lower Patapsco data. Interwell comparisons were made between data in a single well designated as background and a group of downgradient wells. In 2009, the USEPA released a Unified Guidance document for the statistical evaluation of groundwater (USEPA, 2009). Following the concepts in that document, the statistical approach presented herein was modified beginning with the first semi-annual monitoring report for 2010. Another modification in the procedure is that the Lower Patapsco is only monitored annually, in the spring. In this section, the following topics are discussed: the present approach, the data preparation, and the results for both groundwater-bearing units.

6.1 Statistical Procedure

The lack of uncontaminated background wells indicated that a proper statistical analysis program would have to be based on intrawell testing. Typical intrawell tests, such as comparison to intrawell upper prediction limits or Shewhart-CUSUM control charts are typically used to compare new data to previous data that represent unimpacted groundwater conditions. This is not possible at this Site because all twenty-six of the wells have some history of detection of manmade chemicals. For these reasons, the best approach is an intrawell test that could measure trends. Mann-Kendall testing was selected as the test for these data. This nonparametric test can evaluate a set of data points in chronological order and determine if an increasing or decreasing slope is a statistically significant trend.

One important parameter in tests for trends is the number of data points selected from the data set. There have been 40 sampling events, two per year since 1994, for many of the constituent-well pairs. With a data set of this size, it is possible to miss a recent trend due to the legacy of twenty years of data. For this reason, a “sliding window” approach with 12 data points was selected as the most appropriate diagnostic approach. Data points representing the 12 most recent sampling events were selected. For the Upper Patapsco, these data points cover the time from the autumn of 2008 to the spring of 2014. For the Lower Patapsco, these data points cover the time from the autumn of 2007 to the spring of 2014. These 12 points were evaluated for each constituent of concern for each well. In each set of semiannual or annual statistical tests, the oldest point is dropped from the test data sets, and the most recent

point is added. The statistical tests are conducted on 12 data points, with new points added each sampling event and old ones being removed.

The data were loaded into a groundwater statistical program, Sanitas™ prepared by Sanitas Technologies in Shawnee, Kansas. Version 9.2.35 (released in 2014) was used. The program was designed to automate the statistical analysis of Resource Conservation and Recovery Act (RCRA) hazardous waste (Subtitle C) and municipal (Subtitle D) landfill groundwater quality data. The program's decision logic guides the user through procedures that ensure that the analysis will meet the requirements of the USEPA, American Society for Testing and Materials, and state regulations. In intrawell testing, there are separate data sets for each combination of monitoring wells and constituents.

As specified above, most of the data sets had 12 members. A small number of analytes, such as 1,4-dichlorobenzene, and 1,3,5-trimethylbenzene were not always in the monitoring program and have fewer members. For each data set, three tests were run using Sanitas: an outlier test, a distribution test, and a trend test. In these tests, non-detections were replaced with values equal to half of the detection limit.

Sanitas contains three outlier tests: USEPA Outlier Screening (USEPA, 1989), Dixon's Test, and Rosner's Test. The USEPA Outlier Screening test was used to specify suspect outliers and Dixon's Test was used to determine if the suspect data point was a statistically significant outlier. Dixon's Test is valid for data sets with up to 25 members. Rosner's Test is recommended for larger data sets. Because the data sets in this analysis always had 12 or less data points, Rosner's Test was not used. Both the tests were conducted at a 5% level of significance ($\alpha = 0.05$). All outliers identified in a data set were listed in the appropriate table. In some cases, a data set had more than one statistically significant outlier. The detection frequency was tabulated. In the event that there were fewer than four detections in a data set, the outliers were not counted.

The Shapiro-Wilk test for normality is recommended by the USEPA for data sets with 50 or fewer members (USEPA, 2009). This test was used to determine if the test data was normally distributed. If the data passed the Shapiro-Wilk test, "Normal" was recorded on the results table. If the data failed the Shapiro-Wilk test, they were logarithmically transformed and retested. If the data passed this test, "Lognormal" was recorded to indicate a lognormal distribution. If the data failed the second test "Unknown" was recorded to indicate that the distribution of the data set was not known. Whenever there were fewer than four detections, the distribution testing indicated an unknown distribution. On the table "NDs" was recorded to indicate that there were too many non-detects to evaluate the true distribution of the data set.

Sen's Slope Estimator was used for each data set in conjunction with the Mann-Kendall test to determine if the slope in the 12 data points was statistically significant at an $\alpha = 0.02$ level. If the slope was significant, a decreasing or increasing trend was indicated on the summary table. Increasing trends were noted in bold font. Trends were counted even in highly censored data sets (having fewer than four detections), but not in cases in which the data set was wholly composed of non-detections.

Descriptive statistics were tabulated for each COC in each monitoring well. These statistics included the number of detections, the number of samples (usually 12), the sample mean, the standard deviation, the variance, the maximum detected value, and the minimum detected value. In computing the mean, the standard deviation and the variance, non-detects were included at half the detection limit.

6.2 Data Preparation

Several steps were taken in order for the data to be input into the Sanitas program. First, qualified data, such as J-flagged values, were accepted as quantitative. Flags were removed and the data were converted to numerical values. No duplicate data points were included in the statistical analysis in order to satisfy the requirement of independence.

As stated above, detection limits were handled in some tests in Sanitas by inserting one half of the detection limit. This presented a practical challenge, because detection limits for non-detections that occurred prior to September 2009 were not available. One option, using "< 0" as an input, will generate a warning flag in Sanitas because such values can create instability in some tests. It was therefore necessary to determine a surrogate detection limit. For all of these data points, the MDLs that were available in the laboratory reports for spring 2010 were used. It was assumed that the MDLs had the same values in previous sampling events. This compromise seemed to work well, except for thallium. For some data sets, a detection limit of 1.0 $\mu\text{g/L}$ from the autumn 2009 data was used as the detection limit instead.

As stated previously, analytes that were never detected or very rarely detected, as well as analytes that appeared to be laboratory contaminants were removed from the statistical analysis. This was necessary in order to minimize the number of tests on data sets composed of detection limits and make the statistical analysis more diagnostic. The decision to remove or keep an analyte was based upon detection frequency in the data base for all sampling events and not just the most recent 12 events.

In preparing the data tables, naphthalene was included with the SVOCs. Four metals (calcium, magnesium, potassium, and sodium) were tabulated with the inorganic parameters rather than the metals. Total 1,2-dichloroethene was excluded in favor of the individual isomers, cis-1,2-dichloroethene and trans-1,2-dichloroethene. The data for the two nitrate entries "nitrate" (measured prior to September 2009) and "nitrate-N" (measured since September 2009) were merged into a single entry designated "nitrate-N".

6.3 Statistical Results for the Upper Patapsco

The input data sets used in the Sanitas program are included in **Appendix F**. These attachments show the chosen surrogate detection limits and the data points used in computing the statistical results. The metals input data are included in Attachment F-1 in **Appendix F**. Eighteen metals were statistically analyzed including aluminum, antimony, arsenic, barium, beryllium, cadmium, chromium, cobalt, copper, iron, lead, manganese, mercury, nickel, selenium, thallium, vanadium, and zinc. Eight inorganic groundwater parameters were analyzed: chloride, nitrate-N, nitrogen, sulfate, calcium, magnesium, potassium, and sodium. These can be found in Attachment F-2. The 17 VOCs included in the statistical analysis were 1,1-dichloroethane, 1,2-dichlorobenzene, 1,2-dichloropropane, 1,3,5-trimethylbenzene, 1,4-dichlorobenzene, benzene, CFC-12, chlorobenzene, chloroethane, cis-1,2-dichloroethene, ethylbenzene, PCE, toluene, total xylenes, trans-1,2-dichloroethene, trichloroethene, and vinyl chloride (Attachment F-3). The two SVOCs can be found in Attachment F-4: 1,4-dichlorobenzene and naphthalene.

The Sanitas output data can also be found in **Appendix F**. The outlier analysis and the normality testing for the Upper Patapsco COCs are included in Attachment F-5. The Sen's Slope Estimator and Mann-Kendall test results are in Attachment F-6.

Descriptive statistics for the analytes in the Upper Patapsco can be found in **Appendix G**. These statistics are tabulated in Attachments G-1 to G-4 for each of the metals, inorganic analytes, VOCs, and SVOCs, respectively. Only analytes for which statistical analysis was conducted were included in **Appendix G**. Analytes deleted due to low detection frequency were not included.

The statistical results for the metals are summarized in **Table 12**. No statistically significant increasing trends were identified. Thirteen decreasing trends were identified. The concentrations of metals are declining in the Upper Patapsco.

The statistical results for the inorganic constituents are summarized in **Table 13**. Five statistically significant increasing trends were identified: calcium and magnesium in

MW-7S; sulfate and magnesium in MW12S; and sodium in MW107. There were seven statistically significant decreasing trends identified.

The statistical results for VOCs in the Upper Patapsco are summarized in **Table 14**. One statistically significant increasing trend was identified, chlorobenzene in MW-7S. There were eight statistically significant decreasing trends. Thus, the overall concentrations of VOCs are declining in the Upper Patapsco.

The statistical results for SVOCs in the Upper Patapsco are summarized in **Table 15**. No statistically significant increasing or decreasing trends were discernable.

6.4 Statistical Results for the Lower Patapsco

The input data sets used in the Sanitas program for the Lower Patapsco were also included in **Appendix F**. The metals input data are included in Attachment F-7 in **Appendix F**. Eighteen metals were statistically analyzed including aluminum, antimony, arsenic, barium, beryllium, cadmium, chromium, cobalt, copper, iron, lead, manganese, mercury, nickel, selenium, thallium, vanadium, and zinc. Eight inorganic groundwater parameters were analyzed: chloride, nitrate-N, nitrogen, sulfate, calcium, magnesium, potassium, and sodium. These can be found in Attachment F-8. The seven VOCs included in the statistical analysis were 1,4-dichlorobenzene, benzene, chloroform, cis-1,2-dichloroethene, PCE, toluene, and trichloroethene (Attachment F-9). No SVOCs were statistically analyzed due to low detection frequencies.

The Sanitas output can be found in **Appendix F**. The outlier analysis and the normality testing for the Lower Patapsco COCs are included in Attachment F-10. The Sen's Slope Estimator and Mend-Kendall test results are in Attachment F-11.

Descriptive statistics for the analytes in the Lower Patapsco can be found in **Appendix G**. These statistics are tabulated in Attachments G-5 to G-7 for each of the metals, inorganic analytes, and VOCs, respectively. Only analytes for which statistical analysis was conducted were included in **Appendix G**. Analytes deleted due to low detection frequency were not included.

The statistical results for the metals are summarized in **Table 16**. Twenty-six statistically significant increasing trends were identified out of 180 data sets. Six of the increasing trends are in MW109D. MW7D and MW108D had the next highest number of increasing trends at four each. Barium exhibited a statistically significant increasing trend in five wells.

The statistical results for the inorganic constituents are summarized in **Table 17**. Seventeen statistically increasing trends were identified out of 80 data sets. Two inorganic constituents were increasing in the background well, MW7D. MW4DR had five statistically significant increasing trends (out of eight parameters). MW13D had four increasing trends. There was only one decreasing trend.

The statistical results for VOCs in the Lower Patapsco are summarized in **Table 18**. Two statistically significant increasing trends were identified; both were in MW101D. These two trends, for cis-1,2-dichloroethene and PCE, were also exhibited in the previous statistical analysis. The increasing analytes are members of the PCE biodegradation chain, and their concentrations continue to be somewhat proportional. Four statistically significant decreasing trends were identified, three of which were in MW4DR.

The large number of increasing trends for conservative substances, such as the metals and ions, and the relatively small number of increasing trends in the VOCs supports the conclusion that the LPA is not connected hydraulically to the UPA as described in the CSL Remedial Investigation Report (EM, 2007).

6.5 Observations and Interpretation

This section presents an interpretation of the statistical analysis completed at the CSL. The notable observations include:

- The UPA samples had five statistically significant increasing inorganic constituent trends and one increasing VOC trend.
- One increasing trend (chlorobenzene) was observed in VOC and SVOCs concentrations in the UPA but there were eight decreasing trends for VOCs. The larger number of decreasing trends and the lower number of detections compared to the previous sampling event indicate that groundwater VOC impacts in the UPA are declining.
- The low detection frequencies of the constituents from the UPA provide additional evidence that the LPA is not connected hydraulically to the UPA.
- Detection monitoring parameters were detected above MCLs in the UPA samples listed below. No increasing or decreasing trends were observed at any of those locations.

Annual Monitoring Report

FGGM-17 Closed Sanitary Landfill, Fort George G. Meade

- Nitrate in MW-13S
 - Arsenic in MW-07S, MW-12S, MW-14, MW-18, and MW-19
 - Cadmium in MW-14
 - Chromium in MW-14
 - Lead in MW-14
 - Benzene in MW-19
- Results from the LPA indicate 26 increasing metal trends and 17 increasing inorganic constituent trends.
 - Two statistically significant VOC increasing trends were identified in LPA; both were in MW101D.
 - Detection monitoring parameters were above the MCL in four LPA samples, beryllium in MW7D, carbon tetrachloride in MW4DR, lead in MW-109D, and PCE in MW-101D. An increasing trend was also observed at two locations, lead in MW-109D and PCE in MW-101D.
 - Aluminum, iron, and manganese were often detected above their respective secondary drinking water standards.

The absence of patterns and correlation in the UPA and LPA sample analytical results supports the Remedial Investigation conclusion that the units are separated by the Middle Patapsco clay, which is a thick and effective confining unit (EM, 2007). That most trends are increasing in the LPA and decreasing in the UPA also supports this conclusion; the concentrations of monitored groundwater constituents in the two water bearing units are progressing in opposite directions.

7. Conclusion and Recommendations

7.1 Summary of March 2014 Monitoring Results

The results of the March 2014 groundwater and surface water monitoring are consistent with the results of prior sampling events. MCL exceedances were sporadic and isolated and include benzene and arsenic, concentrations of which exceeded their respective MCLs in samples from the UPA mainly at the southeast corner of Cell 1. At MW14, cadmium, chromium, and lead MCL exceedances were also observed and nitrate exceeded its MCL at MW13. In the LPA, beryllium and lead exceeded their respective MCLs at MW7D and MW109D, respectively. PCE and carbon tetrachloride concentrations exceeded their MCLs in the samples from MW101D and MW4DR, respectively. Historical data for all sampling rounds completed to date are provided in **Appendix H**.

7.1.1 Monitoring in the Upper Patapsco Aquifer

Groundwater sampling activities have been completed under the monitoring requirements for the UPA. Arsenic, benzene, and nitrate are constituents detected in samples from the UPA that have concentrations exceeding MCLs during the March 2014 event and have exceeded MCLs previously; data trend plots for arsenic and benzene concentrations in selected UPA wells are provided as **Figures 7 and 8**, respectively. The trend plots visually display constituent concentrations at selected sampling locations since sampling activities commenced. Neither constituent shows an increasing trend. Statistical analysis shows increasing trends in other constituents detected in samples from the UPA; however, none of these constituents exceeded their MCLs.

A general assessment of the UPA indicates that samples with constituents exceeding their MCLs are generally collected from wells south of landfill Cell 1 and wells located between the cells and the railroad right of way. The occasional historical detections of other compounds are in samples from wells from the same part of the Site.

7.1.2 Monitoring in the Lower Patapsco Aquifer

Groundwater sampling activities have been completed under the monitoring requirements for the LPA. PCE in the sample from MW101D, carbon tetrachloride in the sample from MW04DR, beryllium in the sample from MW07D, and lead in the sample from MW109D exceeded their respective MCLs. A data trend plot for PCE is provided as **Figure 9**.

7.1.3 Monitoring in Surface Water

Three surface water samples were collected during the March 2014 monitoring event. Constituent detections in these samples are summarized in Section 5. No metals were detected at concentrations exceeding State of Maryland Water Quality Criteria. One VOC, acetone, was detected in the sample from SW02 at a concentration below the State of Maryland Water Quality Criteria.

7.1.4 Comparison of Monitoring Results in the Upper and Lower Patapsco Aquifers

PCE, with historical MCL exceedances in the LPA, have been detected generally in only trace concentrations in the UPA. Carbon tetrachloride, consistently detected in MW4DR in the LPA, has never been detected in samples collected from the UPA. Fuel constituents including benzene and ethylbenzene that have been detected in several UPA wells along the east side of the landfill are infrequent trace detections in the LPA. Certain inorganic analytes, most notably arsenic, are persistent in the UPA, but are detected infrequently and at trace concentrations in samples from the LPA.

7.2 Evaluation of the Adequacy of the Monitoring Well Network

7.2.1 Upper Patapsco Aquifer Monitoring Wells

The groundwater monitoring well network for the UPA consists of 16 shallow monitoring wells. These wells are located along the periphery of the waste cells and around the CSL property boundary. Three of the shallow monitoring wells are located southeast of the landfill and off FGGM property. Sampling of these three shallow wells has indicated that constituents detected in the shallow groundwater at the landfill have not migrated an appreciable distance southeast of the installation boundary within the UPA. In order to further characterize shallow UPA groundwater off-post, groundwater samples were collected from a series of soil borings installed in Anne Arundel County Right-of-Way southeast of the Amtrak property. Sampling methodology and analytical results are presented in the June 2014 Draft *Focused Feasibility Study/Assessment of Corrective Measures*.

7.2.2 Lower Patapsco Aquifer Monitoring Wells

The groundwater monitoring network for the LPA consists of ten wells. These wells are located northwest and southeast of the waste cells and landfill property boundary. Groundwater flow in the LPA in this area is from the northwest to the southeast. Based on the existing monitoring well network, three of the deep monitoring wells are located hydraulically upgradient of the landfill. Two of the deep monitoring wells are

Annual Monitoring Report

FGGM-17 Closed Sanitary Landfill, Fort George G. Meade

located crossgradient and five are located downgradient. Three of the deep monitoring wells are located southeast of the landfill and off FGGM property.

Sampling of the deep wells has indicated the presence of constituents. However, these constituents are not related to those detected in samples from the UPA as described in the statistical analysis section (Section 6). Additionally, the Remedial Investigation Report (EM, 2007) documented the presence and effectiveness of the Middle Patapsco Clay as a hydraulic barrier between the Upper and Lower Patapsco aquifers. Although the locations of the LPA wells surround the CSL in areal extent, they do not serve to monitor potential releases to groundwater from the CSL.

It is noted that the LPA is now being handled under a separate Comprehensive Environmental Response, Compensation, and Liability Act Operable Unit (Operable Unit 4 / LPA) and will have its own detailed Remedial Investigation, Feasibility Study, Proposed Plan, and Record of Decision.

An Addendum to the CSL Monitoring Plan dated 20 June 2012 was prepared in response to comments dated 6 April 2012 from the Maryland Department of the Environment (MDE) that agreed to the reduction of monitoring frequency of the ten deep LPA wells from semi-annual to annual. Deep LPA groundwater monitoring wells will continue to be monitored on an annual basis moving forward. The correspondence from MDE dated 6 April 2012 also noted that once a corrective action has been approved for Operable Unit 4 / LPA, a request to discontinue monitoring of the deep LPA wells under the CSL Monitoring Program will be re-evaluated. The revised CSL Monitoring Plan reflecting these changes was submitted on 25 February 2013.

8. References

ARCADIS U.S., Inc. (ARCADIS). 2010a. Sampling and Analysis Plan for the Performance Based Acquisition at Fort Meade.

ARCADIS. 2010b. Quality Assurance Project Plan for the Performance Based Acquisition at Fort Meade.

ARCADIS. 2010c. Waste Management Plan for the Performance Based Acquisition at Fort Meade.

EM Federal Engineering. 2007. Groundwater Remedial Investigation for the Closed Sanitary Landfill. August 2007.

URS Group Inc. (URS). 2003. Remedial Investigation and Baseline Risk Assessment, Defense Reutilization and Marketing Office Site, Fort George G. Meade, Maryland. Final. Prepared for U.S. Army Corps of Engineers Baltimore District. 2003.

United States Environmental Protection Agency (USEPA). 1989. Statistical analysis of ground-water monitoring data at RCRA facilities. Interim Final Guidance. Office of Solid Waste, Waste Management Division, EPA/530-SW-89-026. February 1989.

USEPA. 1997. Low-Flow Purging and Sampling of Groundwater Monitoring Wells. Region III. October 1997.

USEPA. 2009. Statistical analysis of groundwater monitoring data at RCRA facilities. Unified Guidance. Office of Resource Conservation and Recovery, EPA/530-R-09-007. March 2009.

Tables

Table 1
Summary of Detection Monitoring Parameters
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics			
1. Antimony	5. Cadmium	9. Lead	13. Thallium
2. Arsenic	6. Chromium	10. Nickel	14. Vanadium
3. Barium	7. Cobalt	11. Selenium	15. Zinc
4. Beryllium	8. Copper	12. Silver	
Organics - List 1			
16. Acetone	28. 1,2-Dibromo-3-chloropropane	40. trans-1,3-Dichloropropene	52. 1,1,2,2-Tetrachloroethane
17. Acrylonitrile	29. 1,2-Dibromoethane	41. Ethylbenzene	53. Tetrachloroethene
18. Benzene	30. 1,2-Dichlorobenzene	42. 2-Hexanone	54. Toluene
19. Bromochloromethane	31. 1,4-Dichlorobenzene	43. Bromomethane	55. 1,1,1-Trichloroethane
20. Bromodichloromethane	32. trans 1,4-Dichloro-2-butene	44. Chloromethane	56. 1,1,2-Trichloroethane
21. Bromoform	33. 1,1 -Dichloroethane	45. Dibromomethane	57. Trichloroethene
22. Carbon disulfide	34. 1,2-Dichloroethane	46. Methylene chloride	58. Trichlorofluoromethane
23. Carbon tetrachloride	35. 1,1-Dichloroethene	47. 2-Butanone	59. 1,2,3-Trichloropropene
24. Chlorobenzene	36. cis-1,2-Dichloroethene	48. Methyl iodide	60. Vinyl acetate
25. Chloroethane	37. trans-1,2-Dichloroethene	49. 4-Methyl-2-pentanone	61. Vinyl chloride
26. Chloroform	38. 1,2-Dichloropropane	50. Styrene	62. Xylenes
27. Dibromochloromethane	39. cis-1,3-Dichloropropene	51. 1,1,1,2-Tetrachloroethane	
State and FGGM Required Parameters			
63. Total Alkalinity	69. Total Dissolved Solids	75. Sodium	81. Color
64. Hardness	70. Mercury	76. Chemical Oxygen Demand	82. Aluminum
65. Ammonia	71. Calcium	77. pH	83. Manganese
66. Nitrate	72. Iron	78. Turbidity	
67. Chloride	73. Magnesium	79. Specific Conductance	
68. Sulfate	74. Potassium	80. Odor	

Table 2
Summary of Assessment Monitoring Parameters
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics			
1. Antimony	5. Cadmium	9. Lead	13. Thallium
2. Arsenic	6. Chromium	10. Nickel	14. Vanadium
3. Barium	7. Cobalt	11. Selenium	15. Zinc
4. Beryllium	8. Copper	12. Silver	
Organics - List 1 (same as Detection Monitoring Parameters)			
Organics - List 2			
63. Acenaphthene	86. Bis(2-ethylhexyl)phthalate	109. Di-n-butyl phthalate	132. Dinoseb
64. Acenaphthylene	87. 4-Bromophenyl phenyl ether	110. Dichlorobenzene	133. Di-n-octyl phthalate
65. Acetonitrile; Methyl cyanide	88. Butyl benzyl phthalate	111. 3,3-Dichlorobenzidine	134. Diphenylamine
66. Acetophenone	89. Chlordane	112. Dichlorodifluoromethane	135. Disulfoton
67. 2-Acetylaminofluorene;2-AAF	90. p-Chloroaniline	113. 2,4-Dichlorophenol	136. Endosulfan I
68. Acrolein	91. Chlorobenzilate	114. 2,6-Dichlorophenol	137. Endosulfan II
69. Aldrin	92. 4-Chloro-3-methylphenol	115. 1,3-Dichloropropane	138. Endosulfan sulfate
70. Allyl chloride	93. 2-Chloronaphthalene	116. 2,2-Dichloropropane	139. Endrin
71. 4-Aminobiphenyl	94. 2-Chlorophenol	117. 1,1-Dichloropropene	140. Endrin aldehyde
72. Anthracene	95. 4-Chlorophenyl phenyl ether	118. Dieldrin	141. Ethyl methacrylate
73. Benzo[a]anthracene	96. Chloroprene	119. Diethyl phthalate	142. Ethyl methanesulfonate
74. Benzo[b]fluoranthene	97. Chrysene	120. Thionazin	143. Famphur
75. Benzo[k]fluoranthene	98. 3-methylphenol	121. Dimethoate	144. Fluoranthene
76. Benzo[ghi]perylene	99. 2-methylphcnol	122. p-(Dimethylamino)azobenzene	145. Fluorene
77. Benzo[a]pyrene	100. 4-methylphenol	123. 7,12-Dimethylbenz[a]anthracene	146. Heptachlor
78. Benzyl alcohol	101. Cyanide	124. 3,3-Dimethylbenzidine	147. Heptachlor epoxide
79. alpha-BHC	102. 2,4-D	125. 2,4-Dimethylphenol	148. Hexachlorobenzene
80. beta-BHC	103. 4,4-DDD	126. Dimethyl phthalate	149. Hexachlorobutadiene
81. deita-BHC	104. 4,4-DDE	127. m-Dinitrobenzene	150. Hexachlorocyclopentadiene
82. gamma-BHC; Lindane	105. 4,4-DDT	128. 4,6-Dinitro-2-methylphenol	151. Hexachloroethane
83. Bis(2-chloroethoxy) methane	106. Diallylate	129. 2,4-Dinitrophenol	152. Hexachloropropene
84. Bis(2-chloroethyl) ether	107. Dibenz[a,h]anthracene	130. 2,4-Dinitrotoluene	153. Indeno(1,2,3-cd)pyrene
85. Bis(2-chloro-l-methylethyl) ether	108. Dibenzofuran	131. 2,6-Dinitrotoluene	154. Isobutyl alcohol
155. Isodrin	170. 2-Naphthylamine	185. 5-Nitro-o-toluidine	200. Silvex; 2,4,5-TP
156. Isophorone	171. 2-Nitroaniline	186. Parathion	201. Sulfide
157. Isosafrole	172. 3-Nitroaniline	187. Pentachlorobenzene	202. 2,4,5-T
158. Kepone	173. 4-Nitroaniline	188. Pentachloronitrobenzene	203. 1,2,4,5-Tetrachlorobenzene
159. Methacrylonitrile	174. Nitrobenzene	189. Pentachlorophenol	204. 2,3,4,6-Tetraochlorophenol
160. Methapyrilcne	175. 2-Nitrophenol	190. Phenacetin	205. Tin
161. Methoxychlor	176. 4-Nitrophenol	191. Phenanthrene	206. o-Toluidine
162. 3-Methylcholanthrene	177. N-Nitrosodi-n-butylamine	192. Phenol	207. Toxaphene
163. Methyl methacrylate	178. N-Nitrosodiethylamine	193. p-Phenylenediamine	208. 1,2,4-Trichlorobenzene
164. Methyl methanesulfonate	179. N-Nitrosodimethylamine	194. Phorate	209. 2,4,5-Trichlorophenol
165. 2-Methylnaphthalene	180. N-Nitrosodiphenylamine	195. Polychlorinated biphenyls	210. 2,4,6-Trichlorophenol
166. Methyl parathion	181. N-Nitrosodipropylamine	196. Pronamide	211. 0,0,0-Triethyl phosphorothioate
167. Naphtialene	182. N-Nitrosomethylethylamine	197. Propionitrile	212. sym-Trinitrobenzene
168. 1,4-Naphthoquinone	183. N-Nitrosopiperidirie	198. Pyrene	
169. 1-Naphthylamine	184. N-Nitrosopyrrolidine	199. Safrole	
State and FGGM Required Parameters			
213. Total Alkalinity	223. Magnesium	233 1,3-Dinitrobenzene	243. Nitrobenzene
214. Hardness	224. Potassium	234. 2,4,6-Trinitrotoluene	244. RDX
215. Ammonia	225. Sodium	235. 2,4-Dinitrotoluene	245. Tetryl
216. Nitrate	226. Chemical Oxygen Demand	236. 2,6-Dinitrotoluene	246. pH
217. Chloride	227. Aluminum	237. 2-Amino-4,6-dinitrotoluene	247. Turbidity
218. Sulfate	228. Manganese	238. 2-Nitrotoluene	
219. Total Dissolved Solids	229. Specific Conductance	239. 3-Nitrotoluene	
220. Mercury	230. Odor	240. 4-Amino-2,6-dinitrotoluene	
221. Calcium	231. Color	241. 4-Nitrotoluene	
222. Iron	232. 1,3,5-Trinitrobenzene	242. HMX	

Table 3
Summary of Analytical Methods
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Chemical Class			
Analyte	EPA Analytical Method	Sample Container	Preservative
Explosives	8330A	1,000mL Glass	Cool to 4° C
Herbicides	8151A	1,000mL Glass	Cool to 4° C
PCBs	8082A	1,000mL Glass	Cool to 4° C
Pesticides	8081B	1,000mL Glass	Cool to 4° C
Mercury	7470A	500 mL Plastic	pH <2 HNO3
SVOCs	8270D	1,000mL Glass	Cool to 4° C
TAL Metals	6010C	500 mL Plastic	pH <2 HNO3
VOCs	8260	40 mL Glass	pH <2 HCL

Wet Chemistry			
Analyte	EPA Analytical Method	Sample Container	Preservative
Alkalinity	SM2320B	250 mL Plastic	Cool to 4° C
Ammonia - N	350.1	250mL Plastic	pH <2 H2SO4
Chemical Oxygen Demand	SM5220D	250mL Plastic	pH <2 H2SO4
Chloride	300.1	250mL Plastic	Cool to 4° C
Color	SM2120B	500mL Plastic	Cool to 4° C
Cyanide	9012B	250mL Plastic	pH >12 NaOH
Hardness	SM2320C	250mL Plastic	pH <2 HNO3
Odor	2150	500mL plastic	Cool to 4° C
pH	SM2400-HB	100mL Plastic	Cool to 4° C
Specific Conductance	120.1	250mL Plastic	Cool to 4° C
Sulfate	300.1	250mL Plastic	Cool to 4° C
Sulfide	SM4500-S2F	500mL Plastic	Zinc Acetate, pH>9 NAOH
Total Dissolved Solids	SM2540C	250mL Plastic	Cool to 4° C
Turbidity	180.1	250mL Plastic	Cool to 4° C

Notes:

EPA - United States Environmental Protection Agency

mL - milliliter

° C - degrees Celsius

PCB - polychlorinated biphenyl

SVOC - semi-volatile organic compound

TAL metals - Target Analyte List Metals

VOC - volatile organic compound

HNO3 - Nitric Acid

H2SO4 - Sulfuric Acid

HCL - Hydrochloric Acid

NaOH - Sodium Hydroxide

Table 4
Monitoring Well Network
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Well ID	Well Material	Well Diameter	Ground Surface Elevation	Top of Casing Elevation	Measured Total Depth	Top of Screen (ft bgs)	Bottom of Screen (ft bgs)	Screen Length	Depth to Water (3/18/2014)	Groundwater Elevation (MSL)
Upper Patapsco Aquifer										
MW2S	PVC	4	161.60	163.93	27.63	24	29	5	16.21	147.72
MW4S	PVC	4	159.34	161.88	15.20	7	12	5	6.77	155.11
MW5	PVC	4	147.35	148.50	29.33	8	28	20	2.47	146.03
MW7S	PVC	4	136.16	137.99	27.30	5.5	25.5	20	3.08	134.91
MW8	PVC	4	140.58	141.76	24.46	8	23	15	7.19	134.57
MW10S	PVC	4	157.93	159.39	19.52	8	18	10	5.08	154.31
MW12S	PVC	4	172.88	174.44	29.94	18	28	10	22.64	151.80
MW13S	PVC	4	167.36	169.16	35.71	19	34	15	24.23	144.93
MW14	PVC	4	163.46	165.68	32.34	20	30	10	17.94	147.74
MW17	PVC	4	170.21	171.81	36.91	20	35	15	23.14	148.67
MW18	PVC	4	166.58	167.84	36.99	20	35	15	23.50	144.34
MW19	PVC	4	168.61	170.01	38.54	22.5	37.5	15	21.66	148.35
MW20	PVC	4	170.27	171.70	32.99	21	31	10	20.73	150.97
MW105	PVC	4	192.84	192.70	62.27	49	59	10	53.56	139.14
MW106	PVC	4	169.21	171.41	33.84	21.5	31.5	10	26.80	144.61
MW107	PVC	4	177.81	179.91	46.23	31.5	41.5	10	35.39	144.52
Lower Patapsco Aquifer										
MW2D	PVC	4	160.32	162.27	88.55	76.5	86.5	10	71.31	90.96
MW4DR	PVC	4	165.58	167.76	150.99	129	149	20	68.35	99.41
MW7D	PVC	4	135.43	137.37	107.51	98	108	10	38.68	98.69
MW10D	PVC	4	158.03	159.62	133.68	117	127	10	63.24	96.38
MW12D	PVC	4	172.45	174.52	136.11	121	131	10	83.73	90.79
MW13D	PVC	4	167.35	168.05	125.45	100	120	20	72.48	95.57
MW101D	PVC	4	160.77	161.17	151.34	133	143	10	73.48	87.69
MW108D	PVC	4	177.15	179.55	176.46	155	165	10	91.20	88.35
MW109D	PVC	4	171.51	171.26	166.42	133.5	153.5	20	83.71	87.55
MW110D	PVC	4	165.42	167.91	159.06	140	160	20	79.38	88.53

Notes:

All measurements in feet
MSL = Mean Sea Level
ft bgs = feet below ground surface
PVC = polyvinyl chloride

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Inorganics	MCL	SMCL	Sample Location Sample ID Date	FM17MW02S	FM17MW04S	FM17MW05	FM17MW07S	FM17MW08	FM17MW105
				FM17MW2S(032414) 3/24/2014	FM17MW4S(032514) 3/25/2014	FM17MW5(032614) 3/26/2014	FM17MW7S(032714) 3/27/2014	FM17MW8(032514) 3/25/2014	FM17MW105(032014) 3/20/2014
Analyte			Units						
Aluminum	NS	50	ug/l	32	1300	1700	55	520	420
Antimony	6	NS	ug/l	--	--	0.23	1.4	--	0.18
Arsenic	10	NS	ug/l	1.4	--	--	18	--	--
Barium	2000	NS	ug/l	39	52	34	96	43	87
Beryllium	4	NS	ug/l	--	0.42	0.89	--	0.4	0.22
Cadmium	5	NS	ug/l	--	0.2	0.24	--	0.15	0.17
Calcium	NS	NS	ug/l	11000	3400	3300	54000	5400	6900
Chromium	100	NS	ug/l	--	0.96	--	0.7	--	9.3
Cobalt	NS	NS	ug/l	7.1	4.9	10	32	50	9
Copper	1000	1000	ug/l	--	2.7	7.4	--	2.2	3.5
Iron	NS	300	ug/l	46000	450	1100	73000	2200	350
Lead	15	NS	ug/l	0.14	0.65	1	--	0.2	0.37
Magnesium	NS	NS	ug/l	3500	580	--	22000	1700	4600
Manganese	NS	50	ug/l	470	46	370	900	290	60
Mercury	2	NS	ug/l	--	0.015	0.051	0.031	0.017	--
Nickel	NS	NS	ug/l	1.2	4.8	27	3.7	21	12
Potassium	NS	NS	ug/l	2100	820	1200	6000	1100	2100
Selenium	50	NS	ug/l	--	0.3	--	1.5	--	--
Silver	NS	100	ug/l	--	--	--	--	--	--
Sodium	NS	NS	ug/l	18000	2100	7600	72000	2800	11000
Vanadium	NS	NS	ug/l	--	--	--	4.1	--	--
Zinc	NS	5000	ug/l	21	43	34	40	31	50

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Inorganics	MCL	SMCL	Sample Location Sample ID Date	FM17MW106	FM17MW107	FM17MW10S	FM17MW12S	FM17MW13S
				FM17MW106(032614) 3/26/2014	FM17MW107(032814) 3/28/2014	FM17MW10S(032714) 3/27/2014	FM17MW12S(032114) 3/21/2014	FM17MW13S(032114) 3/21/2014
Analyte			Units					
Aluminum	NS	50	ug/l	2200	540	--	88	1900
Antimony	6	NS	ug/l	0.23	--	--	0.16	0.2
Arsenic	10	NS	ug/l	--	--	--	24	--
Barium	2000	NS	ug/l	120	24	48	82	46
Beryllium	4	NS	ug/l	2	0.042	--	0.093	3.8
Cadmium	5	NS	ug/l	0.6	--	0.071	--	1.5
Calcium	NS	NS	ug/l	21000	17000	16000	57000	43000
Chromium	100	NS	ug/l	--	23	--	1.9	0.8
Cobalt	NS	NS	ug/l	22	0.55	21	4.9	51
Copper	1000	1000	ug/l	5.5	6.7	--	12	11
Iron	NS	300	ug/l	330	310	28000	150000	700
Lead	15	NS	ug/l	0.73	0.32	--	0.19	1
Magnesium	NS	NS	ug/l	9300	1400	3900	8300	9400
Manganese	NS	50	ug/l	300	4.3	600	2000	830
Mercury	2	NS	ug/l	0.071	--	0.048	0.11	--
Nickel	NS	NS	ug/l	17	14	11	3.6	21
Potassium	NS	NS	ug/l	1600	1600	2300	3700	3500
Selenium	50	NS	ug/l	2.5	0.36	--	0.26	0.34
Silver	NS	100	ug/l	--	--	--	--	--
Sodium	NS	NS	ug/l	110000	4100	3300	2800	13000
Vanadium	NS	NS	ug/l	--	--	--	--	--
Zinc	NS	5000	ug/l	60	11	25	39	60

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Inorganics	MCL	SMCL	Sample Location Sample ID Date	FM17MW14	FM17MW17	FM17MW18	FM17MW19	FM17MW20
				FM17MW14(031914) 3/19/2014	FM17MW17(031914) 3/19/2014	FM17MW18(031914) 3/19/2014	FM17MW19(031914) 3/19/2014	FM17MW20(032014) 3/20/2014
Analyte			Units					
Aluminum	NS	50	ug/l	2600	290	330	150	210
Antimony	6	NS	ug/l	0.7	0.48	0.2	0.26	0.13
Arsenic	10	NS	ug/l	38	--	11	43	--
Barium	2000	NS	ug/l	92	38	85	310	94
Beryllium	4	NS	ug/l	0.21	0.035	0.19	0.063	0.66
Cadmium	5	NS	ug/l	6.6	--	--	--	0.43
Calcium	NS	NS	ug/l	82000	39000	20000	83000	4400
Chromium	100	NS	ug/l	3000	1.1	5	4.1	--
Cobalt	NS	NS	ug/l	53	0.43	3.8	0.94	11
Copper	1000	1000	ug/l	76	2.6	6.9	2.4	2.4
Iron	NS	300	ug/l	130000	2700	74000	40000	150
Lead	15	NS	ug/l	16	0.38	0.37	0.56	0.079
Magnesium	NS	NS	ug/l	18000	3800	5700	44000	2200
Manganese	NS	50	ug/l	1400	2.5	300	70	160
Mercury	2	NS	ug/l	--	--	--	--	--
Nickel	NS	NS	ug/l	1600	1.7	3.4	14	7.5
Potassium	NS	NS	ug/l	8300	2700	2900	62000	1600
Selenium	50	NS	ug/l	--	0.31	--	5.5	--
Silver	NS	100	ug/l	0.23	--	--	0.017	--
Sodium	NS	NS	ug/l	5400	23000	67000	220000	3600
Vanadium	NS	NS	ug/l	12	1.6	--	27	--
Zinc	NS	5000	ug/l	46	16	38	110	72

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Pesticides/Herbicides	MCL	SMCL	Sample Location	FM17MW07S	FM17MW12S	FM17MW19
			Sample ID	FM17MW7S(032714)	FM17MW12S(032114)	FM17MW19(031914)
Analyte			Date	3/27/2014	3/21/2014	3/19/2014
			Units			
2,4,5-TP	50	NS	ug/l	--	--	0.92
2,4-D	70	NS	ug/l	--	--	0.59
4,4-DDT	NS	NS	ug/l	0.0036	--	--
Aldrin	NS	NS	ug/l	--	0.0027	--
Alpha-Bhc	NS	NS	ug/l	--	--	0.011
Beta-Bhc	NS	NS	ug/l	0.014	--	--
Delta-Bhc	NS	NS	ug/l	0.003	0.0015	0.011
Dichlorprop	NS	NS	ug/l	--	--	0.77
Dieldrin	NS	NS	ug/l	--	--	0.032
Endosulfan II	NS	NS	ug/l	0.021	--	0.083
Endrin Ketone	NS	NS	ug/l	--	0.0022	--
Gamma-Bhc	0.2	NS	ug/l	--	0.0026	--
Gamma-chlordane	NS	NS	ug/l	--	0.003	--

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Semi-Volatile Organic Compounds			Sample Location Sample ID Date	FM17MW19 FM17MW19(031914) 3/19/2014
Analyte	MCL	SMCL	Units	
1,2-Dichlorobenzene	600	NS	ug/l	5.4
4-Methylphenol	NS	NS	ug/l	1.2
Naphthalene	NS	NS	ug/l	11

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Volatile Organic Compounds	MCL	SMCL	Sample Location Sample ID Date	FM17MW02S	FM17MW05	FM17MW07S	FM17MW105	FM17MW106
				FM17MW2S(032414) 3/24/2014	FM17MW5(032614) 3/26/2014	FM17MW7S(032714) 3/27/2014	FM17MW 105(032014) 3/20/2014	FM17MW106(032614) 3/26/2014
Analyte			Units					
1,1-Dichloroethane	NS	NS	ug/l	--	--	--	--	--
1,2,4-Trichlorobenzene	70	NS	ug/l	--	--	--	--	--
1,2-Dichlorobenzene	600	NS	ug/l	--	--	--	--	--
1,2-Dichloropropane	5	NS	ug/l	--	--	--	--	--
1,3-Dichlorobenzene	NS	NS	ug/l	--	--	--	--	--
1,4-Dichlorobenzene	75	NS	ug/l	0.4	--	1.7	--	--
2-Phenylbutane	NS	NS	ug/l	--	--	--	--	--
Acetone	NS	NS	ug/l	--	--	6.3	--	--
Benzene	5	NS	ug/l	--	--	1.3	--	--
Carbon Disulfide	NS	NS	ug/l	--	--	--	--	--
CFC-12	NS	NS	ug/l	--	--	--	--	--
Chlorobenzene	100	NS	ug/l	0.86	--	2.9	--	--
Chloroethane	NS	NS	ug/l	--	--	--	--	--
Chloroform	80	NS	ug/l	--	--	--	--	3.8
cis-1,2-Dichloroethene	70	NS	ug/l	--	--	--	--	--
Dichloromethane	3000	NS	ug/l	--	--	--	--	--
Isopropylbenzene	NS	NS	ug/l	--	--	--	--	--
Methyl-Tert-Butylether	NS	NS	ug/l	--	--	--	7	--
Naphthalene	NS	NS	ug/l	--	--	--	--	--
N-Butylbenzene	NS	NS	ug/l	--	--	--	--	--
N-Propylbenzene	NS	NS	ug/l	--	--	--	--	--
Toluene	1000	NS	ug/l	--	--	--	--	--
trans-1,2-Dichloroethene	100	NS	ug/l	--	--	--	--	--
Trichloroethene	5	NS	ug/l	--	0.34	--	--	--
Vinyl Chloride	2	NS	ug/l	--	--	--	--	--

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Volatile Organic Compounds	MCL	SMCL	Sample Location Sample ID Date	FM17MW107	FM17MW10S	FM17MW12S	FM17MW13S
				FM17MW107(032814) 3/28/2014	FM17MW10S(032714) 3/27/2014	FM17MW12S(032114) 3/21/2014	FM17MW13S(032114) 3/21/2014
Analyte			Units				
1,1-Dichloroethane	NS	NS	ug/l	--	--	--	--
1,2,4-Trichlorobenzene	70	NS	ug/l	--	--	--	--
1,2-Dichlorobenzene	600	NS	ug/l	--	--	--	--
1,2-Dichloropropane	5	NS	ug/l	--	--	--	--
1,3-Dichlorobenzene	NS	NS	ug/l	--	--	--	--
1,4-Dichlorobenzene	75	NS	ug/l	--	0.38	2.1	--
2-Phenylbutane	NS	NS	ug/l	--	--	--	--
Acetone	NS	NS	ug/l	--	--	--	--
Benzene	5	NS	ug/l	--	0.36	1	--
Carbon Disulfide	NS	NS	ug/l	--	--	--	--
CFC-12	NS	NS	ug/l	--	--	0.21	0.23
Chlorobenzene	100	NS	ug/l	--	--	0.79	--
Chloroethane	NS	NS	ug/l	--	--	--	--
Chloroform	80	NS	ug/l	1.2	--	--	--
cis-1,2-Dichloroethene	70	NS	ug/l	--	0.5	0.16	--
Dichloromethane	3000	NS	ug/l	--	--	--	--
Isopropylbenzene	NS	NS	ug/l	--	--	--	--
Methyl-Tert-Butylether	NS	NS	ug/l	--	--	0.16	--
Naphthalene	NS	NS	ug/l	--	--	--	--
N-Butylbenzene	NS	NS	ug/l	--	--	--	--
N-Propylbenzene	NS	NS	ug/l	--	--	--	--
Toluene	1000	NS	ug/l	--	--	--	--
trans-1,2-Dichloroethene	100	NS	ug/l	--	--	--	--
Trichloroethene	5	NS	ug/l	--	--	--	--
Vinyl Chloride	2	NS	ug/l	--	--	--	--

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Volatile Organic Compounds	MCL	SMCL	Sample Location Sample ID Date	FM17MW14	FM17MW18	FM17MW19
				FM17MW14(031914) 3/19/2014	FM17MW18(031914) 3/19/2014	FM17MW19(031914) 3/19/2014
Analyte			Units			
1,1-Dichloroethane	NS	NS	ug/l	--	--	0.84
1,2,4-Trichlorobenzene	70	NS	ug/l	--	--	0.38
1,2-Dichlorobenzene	600	NS	ug/l	--	--	0.69
1,2-Dichloropropane	5	NS	ug/l	--	--	0.25
1,3-Dichlorobenzene	NS	NS	ug/l	0.71	--	6.7
1,4-Dichlorobenzene	75	NS	ug/l	4.3	1.3	13
2-Phenylbutane	NS	NS	ug/l	--	--	2.3
Acetone	NS	NS	ug/l	--	--	8.7
Benzene	5	NS	ug/l	1.6	0.21	11
Carbon Disulfide	NS	NS	ug/l	2.8	--	--
CFC-12	NS	NS	ug/l	0.63	--	0.57
Chlorobenzene	100	NS	ug/l	13	0.35	6.9
Chloroethane	NS	NS	ug/l	1.2	--	1.2
Chloroform	80	NS	ug/l	--	--	--
cis-1,2-Dichloroethene	70	NS	ug/l	0.25	--	0.47
Dichloromethane	3000	NS	ug/l	--	--	0.24
Isopropylbenzene	NS	NS	ug/l	--	--	5.4
Methyl-Tert-Butylether	NS	NS	ug/l	--	--	2.2
Naphthalene	NS	NS	ug/l	--	--	13
N-Butylbenzene	NS	NS	ug/l	--	--	2.3
N-Propylbenzene	NS	NS	ug/l	--	--	5.3
Toluene	1000	NS	ug/l	0.18	--	0.23
trans-1,2-Dichloroethene	100	NS	ug/l	--	--	0.44
Trichloroethene	5	NS	ug/l	--	--	--
Vinyl Chloride	2	NS	ug/l	--	--	0.34

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Wet Chemistry	MCL	SMCL	Sample Location Sample ID Date	FM17MW02S	FM17MW04S	FM17MW05	FM17MW07S
				FM17MW2S(032414) 3/24/2014	FM17MW4S(032514) 3/25/2014	FM17MW5(032614) 3/26/2014	FM17MW7S(032714) 3/27/2014
Analyte			Units				
Alkalinity	NS	NS	mg/l	55	--	--	220
Ammonia Nitrogen	NS	NS	mg/l	1.2	--	--	5.7
Chloride	NS	250	mg/l	45	4.6	26	100
Cyanide	0.3	NS	mg/l	0.0029	--	--	--
Nitrate-N	10	NS	mg/l	0.34	--	0.046	0.0085
Nitrogen, as Ammonia	NS	NS	mg/l	1.2	--	--	5.7
Odor	NS	3	t.o.n.	6.06	1	1	3.64
pH	NS	8.5	SU	5.96	3.48	3.4	6.1
Platinum Cobalt Color Units	NS	15	color unit	60	--	--	--
Specific Conductivity	NS	NS	umhos/cm	286	79.5	130	772
Sulfate	NS	250	mg/l	9.2	35	17	17
Total Dissolved Solids	NS	500	mg/l	140	45	68	470
Total Hardness	NS	NS	mg/l	50	12	15	210
Turbidity	NS	NS	ntu	200	6.5	3.4	290

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Wet Chemistry	MCL	SMCL	Sample Location Sample ID Date	FM17MW08	FM17MW105	FM17MW106	FM17MW107
				FM17MW8(032514) 3/25/2014	FM17MW105(032014) 3/20/2014	FM17MW106(032614) 3/26/2014	FM17MW107(032814) 3/28/2014
Analyte			Units				
Alkalinity	NS	NS	mg/l	--	--	--	42
Ammonia Nitrogen	NS	NS	mg/l	--	--	--	--
Chloride	NS	250	mg/l	3.5	22	190	4.3
Cyanide	0.3	NS	mg/l	--	--	--	--
Nitrate-N	10	NS	mg/l	--	3.9	0.58	0.47
Nitrogen, as Ammonia	NS	NS	mg/l	--	--	--	--
Odor	NS	3	t.o.n.	1.15	1	1	--
pH	NS	8.5	SU	3.62	4.63	4.2	6.09
Platinum Cobalt Color Units	NS	15	color unit	--	--	--	--
Specific Conductivity	NS	NS	umhos/cm	102	167	795	126
Sulfate	NS	250	mg/l	46	28	74	11
Total Dissolved Solids	NS	500	mg/l	44	74	430	67
Total Hardness	NS	NS	mg/l	24	42	99	51
Turbidity	NS	NS	ntu	2.6	36	--	18

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

**Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade**

Wet Chemistry	MCL	SMCL	Sample Location Sample ID Date	FM17MW10S	FM17MW12S	FM17MW13S	FM17MW14
				FM17MW10S(032714) 3/27/2014	FM17MW12S(032114) 3/21/2014	FM17MW13S(032114) 3/21/2014	FM17MW14(031914) 3/19/2014
Analyte			Units				
Alkalinity	NS	NS	mg/l	42	87	--	360
Ammonia Nitrogen	NS	NS	mg/l	0.85	--	--	7.5
Chloride	NS	250	mg/l	6.7	2.3	7.6	4.9
Cyanide	0.3	NS	mg/l	--	0.0017	--	0.0029
Nitrate-N	10	NS	mg/l	0.0094	0.12	30	--
Nitrogen, as Ammonia	NS	NS	mg/l	0.85	--	--	7.5
Odor	NS	3	t.o.n.	1	4.8	1	5.77
pH	NS	8.5	SU	5.39	5.47	4.69	6
Platinum Cobalt Color Units	NS	15	color unit	20	600	--	--
Specific Conductivity	NS	NS	umhos/cm	152	542	417	586
Sulfate	NS	250	mg/l	19	270	110	42
Total Dissolved Solids	NS	500	mg/l	88	420	340	380
Total Hardness	NS	NS	mg/l	59	160	160	300
Turbidity	NS	NS	ntu	180	32	6.6	430

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 5
Upper Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade

Wet Chemistry	MCL	SMCL	Sample Location	FM17MW17	FM17MW18	FM17MW19	FM17MW20
			Sample ID	FM17MW17(031914)	FM17MW18(031914)	FM17MW19(031914)	FM17MW20(032014)
Analyte			Units	Date			
Alkalinity	NS	NS	mg/l	59	100	850	--
Ammonia Nitrogen	NS	NS	mg/l	--	2.2	63	--
Chloride	NS	250	mg/l	70	100	310	5.5
Cyanide	0.3	NS	mg/l	--	--	0.0021	--
Nitrate-N	10	NS	mg/l	2	--	--	0.18
Nitrogen, as Ammonia	NS	NS	mg/l	--	2.2	63	--
Odor	NS	3	t.o.n.	1	1.52	8.75	--
pH	NS	8.5	SU	6.6	5.95	6.53	4.91
Platinum Cobalt Color Units	NS	15	color unit	--	--	--	--
Specific Conductivity	NS	NS	umhos/cm	368	606	2610	80.5
Sulfate	NS	250	mg/l	8.2	11	6	21
Total Dissolved Solids	NS	500	mg/l	120	260	1200	30
Total Hardness	NS	NS	mg/l	120	88	60	23
Turbidity	NS	NS	ntu	56	360	370	1.3

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

NS - no standard

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

R - quality control indicates the data is not usable

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 6
Upper Patapsco Aquifer Detections Above Maximum Contaminant Levels
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics

Well ID	Analyte	Concentration (ug/L)	MCL*
FM17MW07S	Arsenic	18	10
FM17MW12S	Arsenic	24	10
FM17MW14	Arsenic	38	10
FM17MW14	Cadmium	6.6	5
FM17MW14	Chromium	3000	100
FM17MW14	Lead	16	15
FM17MW18	Arsenic	11	10
FM17MW19	Arsenic	43	10

Volatile Organic Compounds

Well ID	Analyte	Concentration (ug/L)	MCL*
FM17MW19	Benzene	11	5

Wet Chemistry

Well ID	Analyte	Concentration (mg/L)	MCL*
FM17MW13S	Nitrate-N	30	10

*MCLs are from the "National Primary Water Drinking Water" regulations, USEPA website updated May 2009

Notes:

Laboratory Data qualifiers are defined in Appendix C Table C-1

ug/L= micrograms per liter

MCL= Maximum Contaminant Level

mg/L= milligrams per liter

USEPA = United States Environmental Protection Agency

J = estimated concentration

Table 7
Upper Patapsco Aquifer Detections Above Secondary Maximum Contaminant Levels
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics

Well ID	Analyte	Concentration (ug/L)	SMCL*
FM17MW02S	Iron	46000	300
	Manganese	470	50
FM17MW04S	Aluminum	1300	50
	Iron	450	300
FM17MW05	Aluminum	1700	50
	Iron	1100	300
	Manganese	370	50
FM17MW07S	Aluminum	55	50
	Iron	73000	300
	Manganese	900	50
FM17MW08	Aluminum	520	50
	Iron	2200	300
	Manganese	290	50
FM17MW105	Aluminum	420	50
	Iron	350	300
	Manganese	60	50
FM17MW106	Aluminum	2200	50
	Manganese	300	50
FM17MW107	Aluminum	540	50
FM17MW10S	Iron	28000	300
	Manganese	600	50
FM17MW12S	Aluminum	88	50
	Iron	150000	300
	Manganese	2000	50
FM17MW13S	Aluminum	1900	50
	Iron	700	300
	Manganese	830	50
FM17MW14	Aluminum	2600	50
	Iron	130000	300
	Manganese	1400	50
FM17MW17	Aluminum	290	50
	Iron	2700	300
FM17MW18	Aluminum	330	50
	Iron	74000	300
	Manganese	300	50
FM17MW19	Aluminum	150	50
	Iron	40000	300
	Manganese	70	50
FM17MW20	Aluminum	210	50
	Manganese	160	50

Notes:

*SMCLs are from the "National Secondary Water Drinking Water" regulations, United States Environmental Protection Agency website updated May 2009

Laboratory Data qualifiers are defined in Appendix C Table C-1

ug/L= micrograms per liter

SMCL= Maximum Contaminant Level

J = estimated concentration

Table 7
Upper Patapsco Aquifer Detections Above Secondary Maximum Contaminant Levels
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Wet Chemistry

Well ID	Analyte	Concentration	Units	SMCL*
FM17MW02S	Odor	6.06	t.o.n.	3
	Platinum Cobalt Color Units	60	color unit	15
FM17MW07S	Odor	3.64	t.o.n.	3
FM17MW10S	Platinum Cobalt Color Units	20	color unit	15
FM17MW12S	Odor	4.8	t.o.n.	3
	Platinum Cobalt Color Units	600	color unit	15
	Sulfate	270	mg/L	250
FM17MW14S	Odor	5.77	t.o.n.	3
FM17MW19	Chloride	310	mg/L	250
	Odor	8.75	t.o.n.	3
	Total Dissolved Solids	1200	mg/L	500

Notes:

*SMCLs are from the "National Secondary Water Drinking Water" regulations, United States Environmental Protection Agency website updated May 2009

Laboratory Data qualifiers are defined in Appendix C Table C-1

mg/l= milligrams per liter

SMCL= Maximum Contaminant Level

J = estimated concentration

**Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland**

Inorganics	MCL	SMCL	Sample Location Sample ID Date	FM17MW02D	FM17MW04DR	FM17MW07D	FM17MW101D
				FM17MW2D(032414) 3/24/2014	FM17MW4DR(032514) 3/25/2014	FM17MW7D(032714) 3/27/2014	FM17MW101D(032114) 3/21/2014
Analyte			Units				
Aluminum	NS	50	ug/l	29	1900	2200	590
Antimony	6	NS	ug/l	0.17	--	--	0.35
Arsenic	10	NS	ug/l	--	--	--	--
Barium	2000	NS	ug/l	19	110	190	120
Beryllium	4	NS	ug/l	0.18	1.5	5.2	1.7
Cadmium	5	NS	ug/l	0.16	0.33	1.3	0.26
Calcium	NS	NS	ug/l	4100	5300	36000	22000
Chromium	100	NS	ug/l	--	2	0.44	3.1
Cobalt	NS	NS	ug/l	6	20	82	32
Copper	1000	1000	ug/l	8.9	11	25	13
Iron	NS	300	ug/l	15	1100	--	1100
Lead	15	NS	ug/l	--	1.3	0.41	2.9
Magnesium	NS	NS	ug/l	--	2100	6900	3800
Manganese	NS	50	ug/l	2.8	94	410	340
Mercury	2	NS	ug/l	0.26	--	--	--
Nickel	NS	NS	ug/l	7.4	30	130	30
Potassium	NS	NS	ug/l	1000	3100	2800	3500
Selenium	50	NS	ug/l	--	--	--	--
Silver	NS	100	ug/l	--	--	--	--
Sodium	NS	NS	ug/l	1600	43000	37000	41000
Thallium	2	NS	ug/l	--	0.079	0.1	--
Vanadium	NS	NS	ug/l	--	--	--	1.5
Zinc	NS	5000	ug/l	14	67	160	82

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics	MCL	SMCL	Sample Location Sample ID Date	FM17MW108D	FM17MW109D	FM17MW10D
				FM17MW108D(032614) 3/26/2014	FM17MW109D(032014) 3/20/2014	FM17MW10D(032714) 3/27/2014
Analyte			Units			
Aluminum	NS	50	ug/l	460	5900	750
Antimony	6	NS	ug/l	--	1.6	--
Arsenic	10	NS	ug/l	--	--	--
Barium	2000	NS	ug/l	54	68	150
Beryllium	4	NS	ug/l	2.4	2	2.5
Cadmium	5	NS	ug/l	0.51	0.44	0.93
Calcium	NS	NS	ug/l	4200	65000	29000
Chromium	100	NS	ug/l	4.5	43	1.5
Cobalt	NS	NS	ug/l	41	27	64
Copper	1000	1000	ug/l	15	37	12
Iron	NS	300	ug/l	64	7300	8500
Lead	15	NS	ug/l	0.27	44	0.59
Magnesium	NS	NS	ug/l	1500	11000	3800
Manganese	NS	50	ug/l	120	230	470
Mercury	2	NS	ug/l	0.044	0.13	--
Nickel	NS	NS	ug/l	73	42	29
Potassium	NS	NS	ug/l	1800	4000	2000
Selenium	50	NS	ug/l	0.28	--	2.3
Silver	NS	100	ug/l	--	0.13	--
Sodium	NS	NS	ug/l	19000	290000	61000
Thallium	2	NS	ug/l	0.12	--	0.43
Vanadium	NS	NS	ug/l	--	20	--
Zinc	NS	5000	ug/l	91	180	210

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

**Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland**

Inorganics	MCL	SMCL	Sample Location Sample ID Date	FM17MW110D	FM17MW12D	FM17MW13D
				FM17MW110D(032814) 3/28/2014	FM17MW12D(032114) 3/21/2014	FM17MW13D(032514) 3/25/2014
Analyte			Units			
Aluminum	NS	50	ug/l	470	78	130
Antimony	6	NS	ug/l	--	--	--
Arsenic	10	NS	ug/l	--	--	2.4
Barium	2000	NS	ug/l	28	18	90
Beryllium	4	NS	ug/l	0.83	0.44	0.34
Cadmium	5	NS	ug/l	0.21	--	0.35
Calcium	NS	NS	ug/l	3000	4400	52000
Chromium	100	NS	ug/l	15	--	1.6
Cobalt	NS	NS	ug/l	17	6.3	9.6
Copper	1000	1000	ug/l	7.9	4.9	9.6
Iron	NS	300	ug/l	110	810	1700
Lead	15	NS	ug/l	--	0.14	1.1
Magnesium	NS	NS	ug/l	300	--	4700
Manganese	NS	50	ug/l	41	43	71
Mercury	2	NS	ug/l	0.022	--	--
Nickel	NS	NS	ug/l	33	9.2	14
Potassium	NS	NS	ug/l	1200	740	3600
Selenium	50	NS	ug/l	0.32	--	0.53
Silver	NS	100	ug/l	--	--	--
Sodium	NS	NS	ug/l	7900	1600	15000
Thallium	2	NS	ug/l	--	--	--
Vanadium	NS	NS	ug/l	--	--	--
Zinc	NS	5000	ug/l	38	16	57

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Pesticide/Herbicides			Sample Location Sample ID Date	FM17MW13D FM17MW13D(032514) 3/25/2014
Analyte	MCL	SMCL	Units	
4,4-DDD	NS	NS	ug/l	0.0044
4,4-DDE	NS	NS	ug/l	0.0063
4,4-DDT	NS	NS	ug/l	0.0032
Alpha-chlordane	NS	NS	ug/l	0.0082
Beta-Bhc	NS	NS	ug/l	0.014
Delta-Bhc	NS	NS	ug/l	0.0045
Endosulfan I	NS	NS	ug/l	0.0036
Endosulfan II	NS	NS	ug/l	0.019
Endosulfan Sulfate	NS	NS	ug/l	0.0062
Endrin	250000	NS	ug/l	0.0069
Gamma-chlordane	NS	NS	ug/l	0.01

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Volatile Organic Compounds	MCL	SMCL	Sample Location	FM17MW04DR	FM17MW101D	FM17MW108D	FM17MW109D
			Sample ID	FM17MW4DR(032514)	FM17MW101D(032114)	FM17MW108D(032614)	FM17MW109D(032014)
Analyte			Units	Date			
4-Methyl-2-Pentanone	NS	NS	ug/l	3/25/2014	--	--	0.31
Acetone	NS	NS	ug/l		--	--	3.5
Carbon Tetrachloride	5	NS	ug/l		--	--	--
Chloroform	80	NS	ug/l		1.7	0.17	0.18
cis-1,2-Dichloroethene	70	NS	ug/l		--	5.3	--
Tetrachloroethene	5	NS	ug/l		--	29	1.9
Trichloroethene	5	NS	ug/l		--	2.4	1.5

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Wet Chemistry	MCL	SMCL	Sample Location Sample ID Date	FM17MW02D	FM17MW04DR	FM17MW07D	FM17MW101D
				FM17MW2D(032414) 3/24/2014	FM17MW4DR(032514) 3/25/2014	FM17MW7D(032714) 3/27/2014	FM17MW101D(032114) 3/21/2014
Analyte			Units				
Alkalinity	NS	NS	mg/l	10	--	47	46
Chloride	NS	250	mg/l	4.6	89	59	89
Cyanide	0.3	NS	mg/l	--	--	--	--
Nitrate-N	10	NS	mg/l	--	2.3	0.081	0.93
Odor	NS	3	t.o.n.	1	1	1	1.15
pH	NS	8.5	SU	5.78	4.05	5.31	6.15
Platinum Cobalt Color Units	NS	15	color unit	--	--	5	--
Specific Conductivity	NS	NS	umhos/cm	39.2	333	454	386
Sulfate	NS	250	mg/l	0.56	7.6	77	0.93
Total Dissolved Solids	NS	500	mg/l	--	180	280	230
Total Hardness	NS	NS	mg/l	11	28	130	82
Turbidity	NS	NS	ntu	1.5	91	4.6	75

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Wet Chemistry	MCL	SMCL	Sample Location Sample ID Date	FM17MW108D	FM17MW109D	FM17MW10D
				FM17MW108D(032614) 3/26/2014	FM17MW109D(032014) 3/20/2014	FM17MW10D(032714) 3/27/2014
Analyte			Units			
Alkalinity	NS	NS	mg/l	--	86	48
Chloride	NS	250	mg/l	44	470	110
Cyanide	0.3	NS	mg/l	--	0.0064	--
Nitrate-N	10	NS	mg/l	1	0.52	--
Odor	NS	3	t.o.n.	1	1.32	5.25
pH	NS	8.5	SU	3.8	7.56	5.59
Platinum Cobalt Color Units	NS	15	color unit	--	60	5
Specific Conductivity	NS	NS	umhos/cm	168	1610	527
Sulfate	NS	250	mg/l	2.2	6.8	27
Total Dissolved Solids	NS	500	mg/l	84	800	270
Total Hardness	NS	NS	mg/l	19	230	96
Turbidity	NS	NS	ntu	--	650	73

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 8
Lower Patapsco Aquifer Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Wet Chemistry	MCL	SMCL	Sample Location Sample ID Date	FM17MW110D	FM17MW12D	FM17MW13D
				FM17MW110D(032814) 3/28/2014	FM17MW12D(032114) 3/21/2014	FM17MW13D(032514) 3/25/2014
Analyte			Units			
Alkalinity	NS	NS	mg/l	--	8.6	88
Chloride	NS	250	mg/l	19	4	24
Cyanide	0.3	NS	mg/l	--	--	--
Nitrate-N	10	NS	mg/l	0.98	0.51	0.56
Odor	NS	3	t.o.n.	--	1	2.49
pH	NS	8.5	SU	4.39	5.32	6.06
Platinum Cobalt Color Units	NS	15	color unit	--	--	--
Specific Conductivity	NS	NS	umhos/cm	79	40.5	373
Sulfate	NS	250	mg/l	2.1	1.6	58
Total Dissolved Solids	NS	500	mg/l	50	25	260
Total Hardness	NS	NS	mg/l	10	13	160
Turbidity	NS	NS	ntu	2.1	10	9.9

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

-- - non detects

mg/L - milligrams per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS- No Standard

MCL-Maximum Concentration Level

SMCL-Secondary Maximum Concentration Level

Concentrations that exceed the MCL are shaded.

Concentrations that exceed the SMCL are bold.

Table 9
Lower Patapsco Aquifer Detections Above Maximum Contaminant Levels
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics

Well ID	Analyte	Concentration (ug/L)	MCL*
FM17MW07D	Beryllium	5.2	4
FM17MW109D	Lead	44	15

Organics

Well ID	Analyte	Concentration (ug/L)	MCL*
FM17MW04DR	Carbon Tetrachloride	8.6	5
FM17MW101D	Tetrachloroethene	29	5

Notes:

*MCLs are from the "National Primary Water Drinking Water" regulations, United States Environmental Protection Agency website updated May 2009

Laboratory Data qualifiers are defined in Appendix C Table C-1

ug/L= micrograms per liter

MCL= Maximum Contaminant Level

Table 10
Lower Patapsco Aquifer Detections Above Secondary Maximum Contaminant Levels
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics

Well ID	Analyte	Concentration (ug/L)	SMCL*
FM17MW04DR	Aluminum	1900	50
	Iron	1100	300
	Manganese	94	50
FM17MW07D	Aluminum	2200	50
	Manganese	410	50
FM17MW101D	Aluminum	590	50
	Iron	1100	300
	Manganese	340	50
FM17MW108D	Aluminum	460	50
	Manganese	120	50
FM17MW109D	Aluminum	5900	50
	Iron	7300	300
	Manganese	230	50
FM17MW10D	Aluminum	750	50
	Iron	8500	300
	Manganese	470	50
FM17MW110D	Aluminum	470	50
FM17MW12D	Aluminum	78	50
	Iron	810	300
FM17MW13D	Aluminum	130	50
	Iron	1700	300
	Manganese	71	50

Notes:

*SMCLs are from the "National Secondary Water Drinking Water" regulations, United States Environmental Protection Agency website updated May 2009

Laboratory Data qualifiers are defined in Appendix C Table C-1

ug/L= micrograms per liter

SMCL= Maximum Contaminant Level

t.o.n=Threshold Odor Number

J = estimated concentration

Table 10
Lower Patapsco Aquifer Detections Above Secondary Maximum Contaminant Levels
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Wet Chemistry

Well ID	Analyte	Units	Concentration	SMCL*
FM17MW109D	Chloride	mg/L	470	250
	Platinum Cobalt Color Units	color unit	60	15
	Total Dissolved Solids	mg/L	800	500
FM17MW10D	Odor	t.o.n.	5.25	3

Notes:

*SMCLs are from the "National Secondary Water Drinking Water" regulations, United States Environmental Protection Agency website updated May 2009

Laboratory Data qualifiers are defined in Appendix C Table C-1

SMCL= Maximum Contaminant Level

mg/L= milligram per liter

t.o.n.=Threshold Odor Number

J=estimated concentration

Table 11
Surface Water Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Inorganics	Sample Location Sample ID Date	Maryland Water Quality Criteria		FM17SW01	FM17SW02	FM17SW03
		Drinking Water	Fresh Water	FM17SW1(032414) 3/24/2014	FM17SW2(032814) 3/28/2014	FM17SW3(032714) 3/27/2014
Analyte	Units					
Aluminum	ug/l	3700	NS	350	210	71
Antimony	ug/l	6	NS	0.73	--	--
Arsenic	ug/l	10	150	2.4	--	--
Barium	ug/l	2000	NS	36	34	36
Beryllium	ug/l	4	NS	--	0.036	--
Calcium	ug/l	NS	NS	30000	42000	53000
Chromium	ug/l	100	NS	1.5	0.89	--
Cobalt	ug/l	NS	NS	0.63	0.21	0.6
Copper	ug/l	1300	9	5	3.2	--
Iron	ug/l	2600	NS	700	300	1700
Lead	ug/l	15	2.5	1.6	0.53	--
Magnesium	ug/l	NS	NS	4200	6700	9200
Manganese	ug/l	73	NS	52	--	65
Nickel	ug/l	73	52	3	--	2.9
Potassium	ug/l	NS	NS	4000	2700	4800
Selenium	ug/l	50	5	--	0.7	--
Sodium	ug/l	NS	NS	180000	130000	52000
Vanadium	ug/l	3.7	NS	2	--	--
Zinc	ug/l	1100	120	26	17	16

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

Shaded - value exceeds Maryland Water Quality Criteria for Human Health for Consumption of Drinking Water

Boldface - value exceeds State of Maryland Chronic Ambient Water Quality Criteria for Fresh Water (Code of Maryland Regulations 26.08.02.03-2)

-- - non detects

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS - not specified

Table 11
Surface Water Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Volatile Organic Compounds	Sample Location Sample ID Date	Maryland Water Quality Criteria		FM17SW02 FM17SW2(032814) 3/28/2014
		Drinking Water	Fresh Water	
Analyte	Units			
Acetone	ug/l	550	NS	4.7

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

Shaded - value exceeds Maryland Water Quality Criteria for Human Health for Consumption of Drinking Water

Boldface - value exceeds State of Maryland Chronic Ambient Water Quality Criteria for Fresh Water (Code of Maryland Regulations 26.08.02.03-2)

-- - non detects

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS - not specified

Table 11
Surface Water Positive Detections
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Wet Chemistry	Sample Location Sample ID Date	Maryland Water Quality Criteria		FM17SW01	FM17SW02	FM17SW03
		Drinking Water	Fresh Water	FM17SW1(032414) 3/24/2014	FM17SW2(032814) 3/28/2014	FM17SW3(032714) 3/27/2014
Analyte	Units					
Alkalinity	mg/l	NS	NS	71	120	130
Chloride	mg/l	NS	NS	290	210	85
Nitrate-N	mg/l	NS	NS	--	0.056	0.69
Odor	t.o.n.	NS	NS	2.3	--	1
pH	SU	NS	NS	7.26	8.01	7.25
Platinum Cobalt Color Units	color unit	NS	NS	40	--	5
Specific Conductivity	umhos/cm	NS	NS	1050	927	576
Sulfate	mg/l	NS	NS	15	10	29
Total Dissolved Solids	mg/l	NS	NS	620	500	340
Total Hardness	mg/l	NS	NS	90	140	160
Turbidity	ntu	NS	NS	39	10	5.2

Notes:

Laboratory data qualifiers are defined in Appendix C Table C-1

Shaded - value exceeds Maryland Water Quality Criteria for Human Health for Consumption of Drinking Water

Boldface - value exceeds State of Maryland Chronic Ambient Water Quality Criteria for Fresh Water (Code of Maryland Regulations 26.08.02.03-2)

-- - non detects

mg/L - milligrams per liter

ug/L - micrograms per liter

ntu - nephelometric turbidity units

t.o.n - threshold odor number

umhos/cm - micromhos per centimeter

SU - standard units

J - estimated concentration

NS - not specified

Table 12. Statistical Analysis of Metals Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt	Copper	Iron	Lead	Manganese	Mercury	Nickel	Selenium	Thallium	Vanadium	Zinc
MW-4S																		
Outliers	Yes	No	No	No	Yes	No	No	No	No	Yes	Yes	No	No	Yes	No	No	No	No
Distribution	Normal	ND	ND	Normal	Normal	Unknown	Unknown	Normal	Normal	Lognormal	Lognormal	Normal	ND	Lognormal	ND	ND	ND	Normal
Detection Freq.	11	2	3	12	8	8	6	11	8	12	9	12	3	6	2	0	2	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-5																		
Outliers	No	No	No	No	Yes (5)	No	No	No	No	No	No	No	No	Yes (2)	No	No	No	No
Distribution	Unknown	ND	ND	Normal	Normal	Unknown	Unknown	Normal	Lognormal	Lognormal	Lognormal	Normal	ND	Normal	ND	Unknown	ND	Normal
Detection Freq.	9	3	3	12	7	7	5	12	12	12	10	12	3	12	3	6	1	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-7S																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Unknown	Unknown	Normal	Normal	ND	ND	Normal	Normal	ND	Normal	Unknown	Normal	Lognormal	Unknown	Unknown	ND	Unknown	ND
Detection Freq.	5	4	9	12	3	0	5	12	1	12	4	12	4	4	3	4	2	
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-13S																		
Outliers	No	No	No	No	No	No	No	Yes	Yes	Yes	No	No	No	No	Yes	No	No	No
Distribution	Normal	Lognormal	Lognormal	Normal	Normal	Normal	Lognormal	Lognormal	Lognormal	Normal	Unknown	Normal	ND	Normal	Lognormal	Unknown	ND	Normal
Detection Freq.	11	4	6	12	10	11	7	12	11	12	9	12	0	12	6	4	2	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-17																		
Outliers	No	No	No	No	No	No	Yes	No	No	No	Yes	No	No	Yes	No	No	No	No
Distribution	Normal	Lognormal	Lognormal	Normal	ND	ND	Normal	Unknown	Normal	Lognormal	Lognormal	Unknown	ND	Lognormal	Lognormal	ND	Unknown	Lognormal
Detection Freq.	10	5	6	12	3	1	9	6	10	12	9	10	3	5	5	2	5	5
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-10S																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No
Distribution	Unknown	ND	Lognormal	Normal	ND	ND	ND	Normal	ND	Normal	Unknown	Normal	Lognormal	Normal	ND	Unknown	ND	Normal
Detection Freq.	6	1	4	12	2	2	1	12	2	12	6	12	4	8	0	4	0	8
Trend	No	No	No	No	No	No	No	Decreasing	No	No	No	No	No	No	No	No	No	No
MW-8																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Normal	ND	ND	Normal	Unknown	Lognormal	Normal	Lognormal	Lognormal	Normal	Lognormal	Normal	ND	Normal	ND	ND	ND	Normal
Detection Freq.	9	2	3	12	6	8	5	12	6	12	9	12	3	12	2	0	1	12
Trend	No	No	No	No	Decreasing	No	Decreasing	No	No	No	No	No	No	No	No	No	No	No
MW-12S																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No
Distribution	Unknown	ND	Lognormal	Normal	Unknown	Lognormal	Lognormal	Lognormal	Lognormal	Normal	Lognormal	Normal	ND	Unknown	Lognormal	ND	ND	Lognormal
Detection Freq.	7	2	9	12	4	6	7	9	11	12	6	12	1	5	7	2	0	9
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-2S																		
Outliers	No	No	Yes	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No
Distribution	Lognormal	ND	Lognormal	Normal	Unknown	Lognormal	Normal	Lognormal	Lognormal	Lognormal	Normal	Lognormal	ND	Lognormal	Unknown	ND	ND	Lognormal
Detection Freq.	9	2	7	12	4	6	4	11	10	12	8	12	3	7	4	2	1	11
Trend	No	No	No	No	Decreasing	Decreasing	No	No	Decreasing	No	Decreasing	No	No	No	No	No	No	Decreasing

Footnotes one page 2.

Table 12. Statistical Analysis of Metals Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt	Copper	Iron	Lead	Manganese	Mercury	Nickel	Selenium	Thallium	Vanadium	Zinc
MW-14																		
Outliers	No	No	No	No	No	No	Yes	No	No	No	No	No	No	No	Yes	No	No	No
Distribution	Unknown	ND	Normal	Normal	ND	ND	Normal	Unknown	Lognormal	Normal	Lognormal	Lognormal	ND	Unknown	Lognormal	ND	Normal	Unknown
Detection Freq.	7	3	12	12	2	2	10	6	5	12	5	12	3	5	6	2	7	6
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-18																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Unknown	Lognormal	Normal	Normal	Unknown	ND	Lognormal	Unknown	Lognormal	Normal	Lognormal	Normal	ND	Unknown	Lognormal	ND	ND	Lognormal
Detection Freq.	7	4	10	12	4	0	5	6	9	12	7	12	3	6	4	3	1	7
Trend	No	No	No	No	Decreasing	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-19																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Unknown	Unknown	Normal	Normal	Unknown	ND	Normal	Unknown	Unknown	Normal	Unknown	Normal	ND	Unknown	Unknown	ND	Normal	Unknown
Detection Freq.	6	4	12	12	4	0	9	5	6	12	6	12	2	7	7	2	12	5
Trend	No	No	No	Decreasing	Decreasing	No	No	No	No	Decreasing	No	Decreasing	No	No	No	No	No	No
MW-20																		
Outliers	No	No	No	No	No	Yes	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Unknown	ND	ND	Normal	Unknown	Lognormal	ND	Normal	Lognormal	Lognormal	Lognormal	Normal	ND	Unknown	Unknown	ND	ND	Normal
Detection Freq.	10	2	3	12	4	8	3	12	7	12	7	12	3	6	4	1	3	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-105																		
Outliers	No	No	No	Yes	No	No	No	Yes	No	No	No	No	No	No	No	No	No	No
Distribution	Normal	Lognormal	Unknown	Normal	Unknown	Normal	Lognormal	Normal	Lognormal	Lognormal	Lognormal	Normal	Lognormal	Unknown	Unknown	ND	ND	Normal
Detection Freq.	11	4	4	11	5	8	8	12	11	11	7	11	4	8	5	1	1	11
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-106																		
Outliers	No	No	No	No	No	No	No	No	Yes (2)	No	Yes (2)	No	No	No	No	No	No	No
Distribution	Normal	ND	Lognormal	Normal	Lognormal	Lognormal	Lognormal	Unknown	Lognormal	Normal	Normal	Normal	Lognormal	Lognormal	Normal	ND	ND	Normal
Detection Freq.	12	3	6	12	12	10	6	12	10	12	9	12	7	12	5	2	2	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-107																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Lognormal	ND	ND	Normal	ND	ND	Unknown	Unknown	Unknown	Lognormal	Lognormal	ND	ND	Unknown	ND	ND	ND	Normal
Detection Freq.	8	1	1	12	2	1	4	4	5	11	7	3	3	4	2	0	1	7
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.

If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "Increasing" was indicated in **bold font**.

Table 13. Statistical Analysis of Inorganic Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	Chloride	Nitrate-N	Nitrogen	Sulfate	Calcium	Magnesium	Potassium	Sodium
MW-4S								
Outliers	No	No	No	No	No	No	No	No
Distribution	Normal	Lognormal	ND	Normal	Normal	Normal	Unknown	Normal
Detection Freq.	12	10	2	12	12	10	9	12
Trend	Decreasing	No	No	No	No	No	No	No
MW-5								
Outliers	No	No	No	No	Yes	No	No	No
Distribution	Normal	Lognormal	Unknown	Normal	Normal	Unknown	Unknown	Unknown
Detection Freq.	12	10	4	12	12	10	7	12
Trend	No	No	No	No	No	No	No	No
MW-7S								
Outliers	No	Yes	No	No	No	No	No	No
Distribution	Normal	Lognormal	Normal	Normal	Normal	Normal	Lognormal	Normal
Detection Freq.	12	5	12	12	12	12	12	12
Trend	No	No	No	Decreasing	Increasing	Increasing	No	No
MW-13S								
Outliers	No	No	No	No	No	No	No	No
Distribution	Lognormal	Normal	Lognormal	Normal	Normal	Normal	Lognormal	Normal
Detection Freq.	12	12	9	12	12	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-17								
Outliers	No	No	No	No	No	No	No	No
Distribution	Lognormal	Normal	Unknown	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	12	4	12	12	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-10S								
Outliers	No	No	No	No	Yes	No	No	Yes
Distribution	Unknown	Unknown	Normal	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	4	12	12	12	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-8								
Outliers	No	No	No	No	No	No	No	No
Distribution	Unknown	Unknown	Unknown	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	5	5	12	12	11	8	12
Trend	Decreasing	No	No	No	No	No	No	No
MW-12S								
Outliers	Yes	No	No	No	No	Yes	No	Yes
Distribution	Lognormal	Lognormal	Normal	Normal	Normal	Normal	Normal	Normal
Detection Freq.	11	11	11	12	12	12	12	11
Trend	Decreasing	No	No	Increasing	No	Increasing	No	No
MW-2S								
Outliers	Yes	No	No	No	No	No	No	No
Distribution	Lognormal	Unknown	Normal	Normal	Lognormal	Lognormal	Unknown	Lognormal
Detection Freq.	12	7	11	12	12	8	9	10
Trend	No	No	No	No	No	No	No	No

Footnotes one page 2.

Table 13. Statistical Analysis of Inorganic Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	Chloride	Nitrate-N	Nitrogen	Sulfate	Calcium	Magnesium	Potassium	Sodium
MW-14								
Outliers	No	No	No	No	No	Yes	No	No
Distribution	Normal	Unknown	Normal	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	4	12	11	12	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-18								
Outliers	No	No	Yes	No	No	No	No	No
Distribution	Normal	Lognormal	Normal	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	7	12	10	12	12	12	12
Trend	No	Decreasing	No	No	No	No	No	No
MW-19								
Outliers	No	No	No	No	No	No	No	Yes
Distribution	Normal	Lognormal	Normal	Lognormal	Normal	Normal	Normal	Normal
Detection Freq.	12	6	12	10	12	12	12	11
Trend	No	No	No	No	Decreasing	No	No	No
MW-20								
Outliers	No	No	No	Yes	No	No	No	No
Distribution	Normal	Normal	Unknown	Normal	Normal	Normal	Unknown	Normal
Detection Freq.	12	12	6	12	12	12	9	12
Trend	No	No	No	No	No	No	No	No
MW-105								
Outliers	No	No	No	Yes	Yes (2)	No	Yes	No
Distribution	Lognormal	Normal	ND	Normal	Lognormal	Lognormal	Lognormal	Lognormal
Detection Freq.	12	12	1	12	11	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-106								
Outliers	No	No	No	No	No	No	No	No
Distribution	Normal	Lognormal	ND	Normal	Normal	Normal	Unknown	Normal
Detection Freq.	12	12	2	12	12	12	11	12
Trend	No	No	No	No	No	No	No	No
MW-107								
Outliers	No	No	No	No	No	No	Yes	No
Distribution	Lognormal	Lognormal	ND	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	12	2	12	12	11	11	12
Trend	No	No	No	Decreasing	No	No	No	Increasing

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.

If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "**Increasing**" was indicated in **bold font**.

Table 14. Statistical Analysis of Volatile Organic Compounds Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	1,1-Dichloro-ethane	1,2-Dichloro-benzene	1,2-Dichloro-propane	1,3,5-Trimethyl-benzene	1,4-Dichloro-benzene	Benzene	CFC-12	Chloro-benzene	Chloro-ethane	cis-1,2-Dichloro-ethene	Ethylbenzene	Tetrachloro-ethene	Toluene	Total Xylenes	trans-1,2-Dichloro-ethene	Trichloro-ethene	Vinyl chloride
MW-4S																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-5																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	Unknown	ND	Unknown	ND	ND	ND	ND	ND	Normal	ND
Detection Freq.	0	0	0	0	1	1	0	4	0	6	0	0	1	0	0	12	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-7S																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Normal	ND	ND	ND	Normal	Normal	ND	Normal	Normal	Lognormal	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	9	2	3	0	12	12	1	12	10	6	0	0	1	0	0	0	0
Trend	No	No	No	No	No	No	No	Increasing	No	No	No	No	No	No	No	No	No
MW-13S																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	2	0	0	0	3	1	2	2	0	3	0	0	1	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-17																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	0	0	0	0	1	1	0	1	1	0	0	0	0	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-10S																	
Outliers	No	No	No	No	Yes	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Normal	ND	ND	ND	Lognormal	Normal	Normal	Unknown	ND	Normal	ND	ND	ND	ND	ND	ND	Unknown
Detection Freq.	11	0	0	0	12	12	9	5	3	12	0	0	1	0	0	0	4
Trend	No	No	No	No	No	No	Decreasing	No	No	No	No	No	No	No	No	No	No
MW-8																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	3	0	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-12S																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	Lognormal	ND	ND	Normal	Normal	Normal	Lognormal	Lognormal	Normal	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	1	4	0	0	12	10	7	9	7	6	0	0	2	0	1	3	2
Trend	No	Decreasing	No	No	No	No	No	No	Decreasing	No	No	No	No	No	No	No	No
MW-2S																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	Unknown	ND	ND	Unknown	ND	ND	ND	ND	ND	ND	ND	ND	Unknown
Detection Freq.	2	1	0	0	6	3	2	6	1	0	0	0	1	0	0	0	5
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Footnotes one page 2.

Table 14. Statistical Analysis of Volatile Organic Compounds Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	1,1-Dichloro-ethane	1,2-Dichloro-benzene	1,2-Dichloro-propane	1,3,5-Trimethyl-benzene	1,4-Dichloro-benzene	Benzene	CFC-12	Chloro-benzene	Chloro-ethane	cis-1,2-Dichloroethene	Ethylbenzene	Tetrachloro-ethene	Toluene	Total Xylenes	trans-1,2-Dichloroethene	Trichloro-ethene	Vinyl chloride
MW-14																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	Unknown	ND	ND	Normal	Normal	Normal	Normal	Normal	Lognormal	ND	ND	Normal	ND	ND	ND	Unknown
Detection Freq.	1	8	0	0	12	12	11	12	10	7	0	0	7	2	2	2	5
Trend	No	No	No	No	Decreasing	No	No	No	No	No	No	No	No	No	No	No	No
MW-18																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	Normal	Lognormal	ND	Unknown	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	0	1	0	0	11	7	2	6	2	2	0	0	1	1	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-19																	
Outliers	No	No	No	No	No	No	No	Yes	No	No	No	No	No	No	Yes	No	No
Distribution	Normal	Unknown	Normal	Lognormal	Normal	Normal	Normal	Normal	Normal	Normal	Unknown	ND	Normal	Normal	Normal	ND	Unknown
Detection Freq.	12	11	8	6	12	12	11	12	11	12	9	0	11	8	11	3	6
Trend	No	Decreasing	No	No	No	No	No	No	No	No	Decreasing	No	Decreasing	Decreasing	No	No	No
MW-20																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	0	0	0	0	2	2	0	1	0	1	0	0	0	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-105																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	Lognormal	ND	ND	ND	ND	ND
Detection Freq.	0	0	0	0	0	0	1	0	0	0	0	4	1	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-106																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-107																	
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.

If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "Increasing" was indicated in **bold font**.

Table 15. Statistical Analysis of Semi-Volatile Organic Compounds Data - Upper Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	1,4-Dichlorobenzene	Naphthalene
MW-4S		
Outliers	No	No
Distribution	ND	ND
Detection Freq.	0	0
Trend	No	No
MW-7S		
Outliers	No	No
Distribution	ND	ND
Detection Freq.	1	2
Trend	No	No
MW-10S		
Outliers	No	No
Distribution	ND	ND
Detection Freq.	0	1
Trend	No	No
MW-8		
Outliers	No	No
Distribution	ND	ND
Detection Freq.	0	1
Trend	No	No
MW-12S		
Outliers	No	No
Distribution	ND	ND
Detection Freq.	1	2
Trend	No	No
MW-14		
Outliers	No	No
Distribution	ND	Unknown
Detection Freq.	3	4
Trend	No	No
MW-19		
Outliers	No	No
Distribution	Unknown	Normal
Detection Freq.	7	12
Trend	No	No
MW-107		
Outliers	No	No
Distribution	ND	ND
Detection Freq.	0	1
Trend	No	No

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.

If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "**Increasing**" was indicated in **bold font**.

Table 16. Statistical Analysis of Metals Data - Lower Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	Aluminum	Antimony	Arsenic	Barium	Beryllium	Cadmium	Chromium	Cobalt	Copper	Iron	Lead	Manganese	Mercury	Nickel	Selenium	Thallium	Vanadium	Zinc
MW-7D																		
Outliers	No	No	No	No	No	Yes	No	No	No	No	No							
Distribution	Lognormal	ND	ND	Normal	Normal	Normal	Lognormal	Normal	Normal	Normal	Unknown	Normal	ND	Normal	ND	Unknown	ND	Normal
Detection Freq.	12	1	2	12	12	11	6	12	12	8	8	12	3	12	2	5	0	12
Trend	Increasing	No	No	Increasing	No	No	No	Increasing	No	No	No	Increasing	No	No	No	No	No	No
MW-2D																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	ND	ND	ND	Lognormal	ND	Unknown	Unknown	Unknown	Normal	Unknown	Unknown	Unknown	Normal	ND	ND	ND	ND	Normal
Detection Freq.	3	2	1	12	2	7	6	5	10	8	4	5	8	3	2	1	0	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	Increasing	No	No	No	No	No
MW-4DR																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	Yes
Distribution	Lognormal	ND	ND	Normal	Lognormal	Normal	Unknown	Normal	ND	Unknown	ND	Normal						
Detection Freq.	10	2	1	12	12	8	8	12	12	12	8	12	4	12	2	5	2	12
Trend	No	No	No	Increasing	No	Increasing	No	No	No	No	No	Increasing	No	No	No	No	No	No
MW-10D																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Unknown	Unknown	Lognormal	Normal	Normal	Unknown	Lognormal	Normal	Normal	Normal	Lognormal	Normal	Lognormal	Normal	Unknown	Lognormal	ND	Normal
Detection Freq.	9	4	4	12	11	9	8	12	10	12	6	12	5	12	4	8	0	12
Trend	No	No	No	No	Increasing	No	No	No	Increasing	No	No	No	No	No	No	No	No	Increasing
MW-12D																		
Outliers	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	No	No	Yes
Distribution	Lognormal	ND	ND	Lognormal	Lognormal	ND	Lognormal	Unknown	Lognormal	Lognormal	Unknown	Normal	ND	Unknown	ND	ND	ND	Lognormal
Detection Freq.	10	2	3	12	7	2	8	6	10	11	5	12	2	7	1	1	1	11
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-13D																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Lognormal	ND	Lognormal	Normal	Normal	Normal	Unknown	Normal	Normal	Unknown	Lognormal	Unknown	ND	Unknown	Unknown	ND	ND	Normal
Detection Freq.	9	2	8	12	7	8	9	12	10	12	8	12	1	10	6	3	1	12
Trend	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
MW-101D																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	Yes	No	No	No	No	No	No
Distribution	Lognormal	Unknown	ND	Normal	Lognormal	Unknown	Lognormal	Normal	Normal	Lognormal	Unknown	Normal	Lognormal	Normal	ND	Unknown	ND	Normal
Detection Freq.	9	4	2	12	8	6	10	12	10	12	5	12	5	12	3	5	1	12
Trend	No	No	No	Increasing	No	No	No	Increasing	No	No	No	No	No	No	No	No	No	No
MW-108D																		
Outliers	Yes	No	No	No	No	No	No	No	Yes	No	No	No	No	No	No	No	No	No
Distribution	Normal	ND	ND	Normal	Unknown	Unknown	Lognormal	Normal	Normal	Lognormal	Lognormal	Normal	ND	Normal	Unknown	Unknown	ND	Normal
Detection Freq.	11	2	2	12	12	7	8	12	12	11	6	12	3	12	4	5	0	12
Trend	No	No	No	Increasing	Increasing	No	No	No	No	No	No	Increasing	No	Increasing	No	No	No	No
MW-109D																		
Outliers	No	No	No	No	No	Yes	No	Yes	No	No	No	No						
Distribution	Lognormal	Unknown	Unknown	Normal	Lognormal	Normal	Lognormal	Unknown	Normal	Lognormal	Lognormal	Normal	Normal	Lognormal	ND	ND	Unknown	Normal
Detection Freq.	11	4	4	12	11	8	11	11	10	12	9	12	11	11	3	3	5	12
Trend	Increasing	No	No	No	No	No	Increasing	No	Increasing	Increasing	Increasing	No	No	No	No	No	No	Increasing
MW-110D																		
Outliers	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Distribution	Normal	ND	ND	Normal	Lognormal	Unknown	Unknown	Normal	Normal	Normal	ND	Normal	Unknown	Normal	ND	ND	ND	Normal
Detection Freq.	11	2	3	12	7	7	7	12	10	11	3	12	4	12	1	3	0	11
Trend	Increasing	No	No	Increasing	No	Increasing	No	No	No	No								

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.

If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "Increasing" was indicated in **bold font**.

Table17. Statistical Analysis of Inorganic Data-Lower Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, MD

	Chloride	Nitrate-N	Nitrogen	Sulfate	Calcium	Magnesium	Potassium	Sodium
MW-7D								
Outliers	No	No	No	No	No	No	Yes	No
Distribution	Normal	Lognormal	Unknown	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	12	7	12	12	12	12	12
Trend	No	No	No	Increasing	No	Increasing	No	No
MW-2D								
Outliers	No	No	No	No	No	No	Yes	No
Distribution	Normal	Unknown	ND	Lognormal	Lognormal	Unknown	Normal	Normal
Detection Freq.	12	9	2	8	11	6	8	10
Trend	No	Decreasing	No	No	No	No	No	No
MW-4DR								
Outliers	No	No	No	No	No	No	No	No
Distribution	Normal	Normal	ND	Normal	Normal	Normal	Lognormal	Normal
Detection Freq.	12	12	3	12	12	12	12	12
Trend	Increasing	No	No	Increasing	Increasing	No	Increasing	Increasing
MW-10D								
Outliers	No	No	No	No	No	No	Yes	No
Distribution	Normal	Unknown	Normal	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	6	10	12	12	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-12D								
Outliers	Yes	Yes	No	No	No	No	No	No
Distribution	Lognormal	Normal	Unknown	Normal	Lognormal	Unknown	Unknown	Unknown
Detection Freq.	11	12	4	9	12	6	7	9
Trend	No	No	No	No	No	No	No	No
MW-13D								
Outliers	No	No	No	No	No	No	No	No
Distribution	Normal	Lognormal	Unknown	Unknown	Normal	Normal	Normal	Normal
Detection Freq.	12	10	11	12	12	12	12	12
Trend	No	No	Increasing	Increasing	No	Increasing	Increasing	No
MW-101D								
Outliers	No	Yes	No	No	No	No	No	No
Distribution	Normal	Normal	ND	Normal	Normal	Normal	Normal	Normal
Detection Freq.	12	11	3	8	12	12	12	12
Trend	No	No	No	No	Increasing	No	Increasing	No
MW-108D								
Outliers	No	No	No	No	Yes	No	Yes	No
Distribution	Normal	Normal	ND	Normal	Normal	Normal	Lognormal	Normal
Detection Freq.	12	12	3	10	12	12	12	12
Trend	No	No	No	No	No	No	No	No
MW-109D								
Outliers	No	No	No	No	No	No	No	No
Distribution	Unknown	Normal	ND	Lognormal	Lognormal	Lognormal	Unknown	Unknown
Detection Freq.	12	11	3	9	12	11	12	12
Trend	No	No	No	No	Increasing	Increasing	No	No
MW-110D								
Outliers	No	No	No	No	No	No	No	No
Distribution	Normal	Normal	ND	Normal	Normal	Normal	Unknown	Normal
Detection Freq.	12	12	0	10	12	8	10	12
Trend	Increasing	No	No	No	No	No	No	Increasing

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.

If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "**Increasing**" was indicated in **bold font**.

Table 18. Statistical Analysis of Volatile Organic Compounds Data - Lower Patapsco Aquifer, Closed Sanitary Landfill, Fort Meade, M

	1,4-Dichlorobenzene	Benzene	Chloroform	cis-1,2-Dichloroethene	Tetrachloroethene	Toluene	Trichloroethene
MW-7D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	Normal	ND	ND	ND	ND	ND
Detection Freq.	0	10	0	0	0	1	0
Trend	No	No	No	No	No	No	No
MW-2D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	1	1	0	0	0	3	0
Trend	No	No	No	No	No	No	No
MW-4DR							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	Unknown	Lognormal	ND	ND	Normal
Detection Freq.	0	0	9	5	0	2	10
Trend	No	No	Decreasing	Decreasing	No	No	Decreasing
MW-10D							
Outliers	No	No	No	No	Yes	No	No
Distribution	ND	ND	ND	ND	Lognormal	ND	ND
Detection Freq.	0	0	0	0	4	3	0
Trend	No	No	No	No	No	No	No
MW-12D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	1	0	0	0	0	2	0
Trend	No	No	No	No	No	No	No
MW-13D							
Outliers	No	No	No	No	No	No	No
Distribution	Normal	Normal	ND	Normal	ND	ND	ND
Detection Freq.	10	11	0	11	0	2	3
Trend	No	Decreasing	No	No	No	No	No
MW-101D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	Normal	Normal	Normal	ND	Normal
Detection Freq.	0	1	6	12	12	1	12
Trend	No	No	No	Increasing	Increasing	No	No
MW-108D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	Normal	ND	Normal	ND	Normal
Detection Freq.	0	0	6	0	12	3	12
Trend	No	No	No	No	No	No	No
MW-109D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	Normal	ND	Lognormal
Detection Freq.	0	0	0	3	10	2	5
Trend	No	No	No	No	No	No	No
MW-110D							
Outliers	No	No	No	No	No	No	No
Distribution	ND	ND	ND	ND	ND	ND	ND
Detection Freq.	2	0	1	0	2	2	2
Trend	No	No	No	No	No	No	No

Footnotes:

Detection Freq. is the detection frequency.

If more than one outlier is found, the number is indicated in parentheses after "Yes."

NDs indicates that there was an insufficient number of detections to determine the distribution.

If the number of detections was 3 or fewer, any "outlier" reported by SANITAS was ignored, and the distribution was reported as ND, regardless of the findings of SANITAS.


If the Mann-Kendall test did not indicate a statistically significant trend, "No" was recorded for trend.

If the trend was statistically significant but decreasing, then "Decreasing" was indicated.

If the trend was statistically significant and increasing, then "**Increasing**" was indicated in **bold font**.

Figures

CITY: MPLS DIV/GROUP: IM DB: MG LD: KS
 FORT MEADE
 Document Path: G:\GIS\Projects\Fort_Meade_01d\ArcMap\CSL\2014-06\Fig1_CSL_Location_20140624.mxd

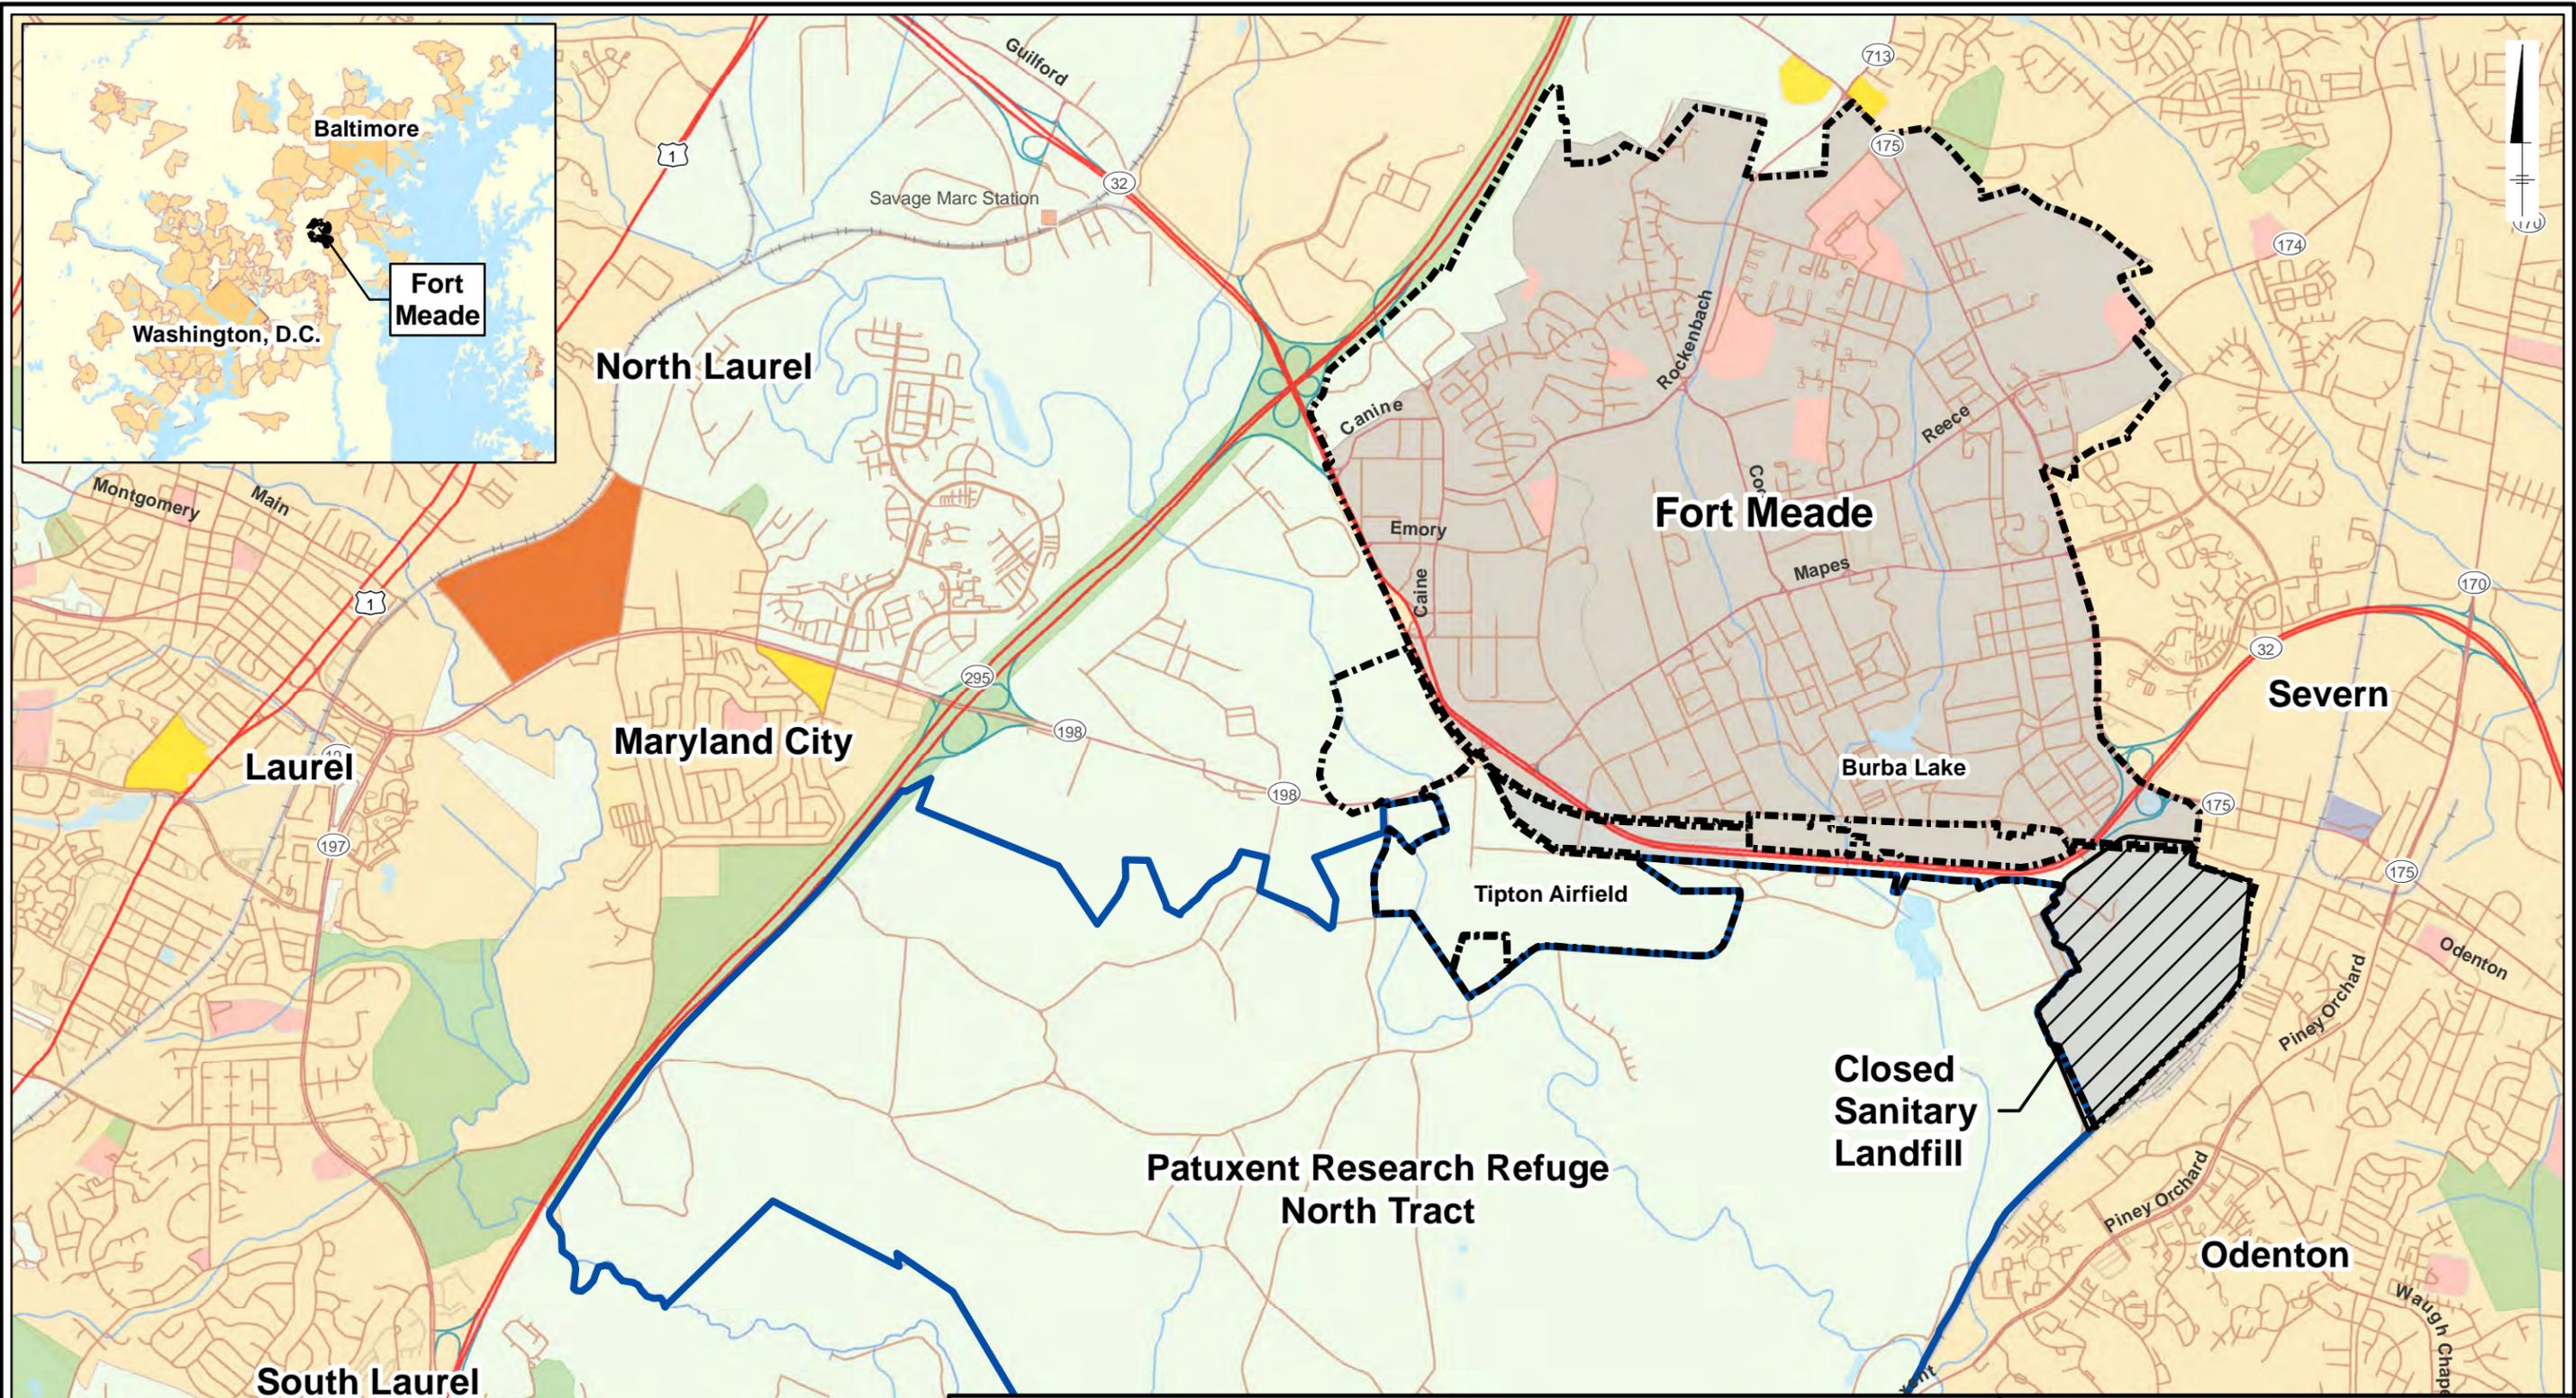

LEGEND:

INSTALLATION BOUNDARY	STREAMS	SCHOOL
CSL BOUNDARY	LAKES	STADIUM
PATUXENT RESEARCH REFUGE	CITY AREA	SHOPPING CENTER
PRIMARY US & STATE HIGHWAYS	LOCAL PARK	
SECONDARY ROAD	MILITARY INSTALLATION	
RAILROADS		

0 2,500 5,000 Feet
 GRAPHIC SCALE


NOTES:
 BASEMAP SOURCE: ESRI STREET MAPS

FORT GEORGE G. MEADE, MARYLAND

**LOCATION MAP
 CLOSED SANITARY LANDFILL**

ARCADIS

FIGURE
1

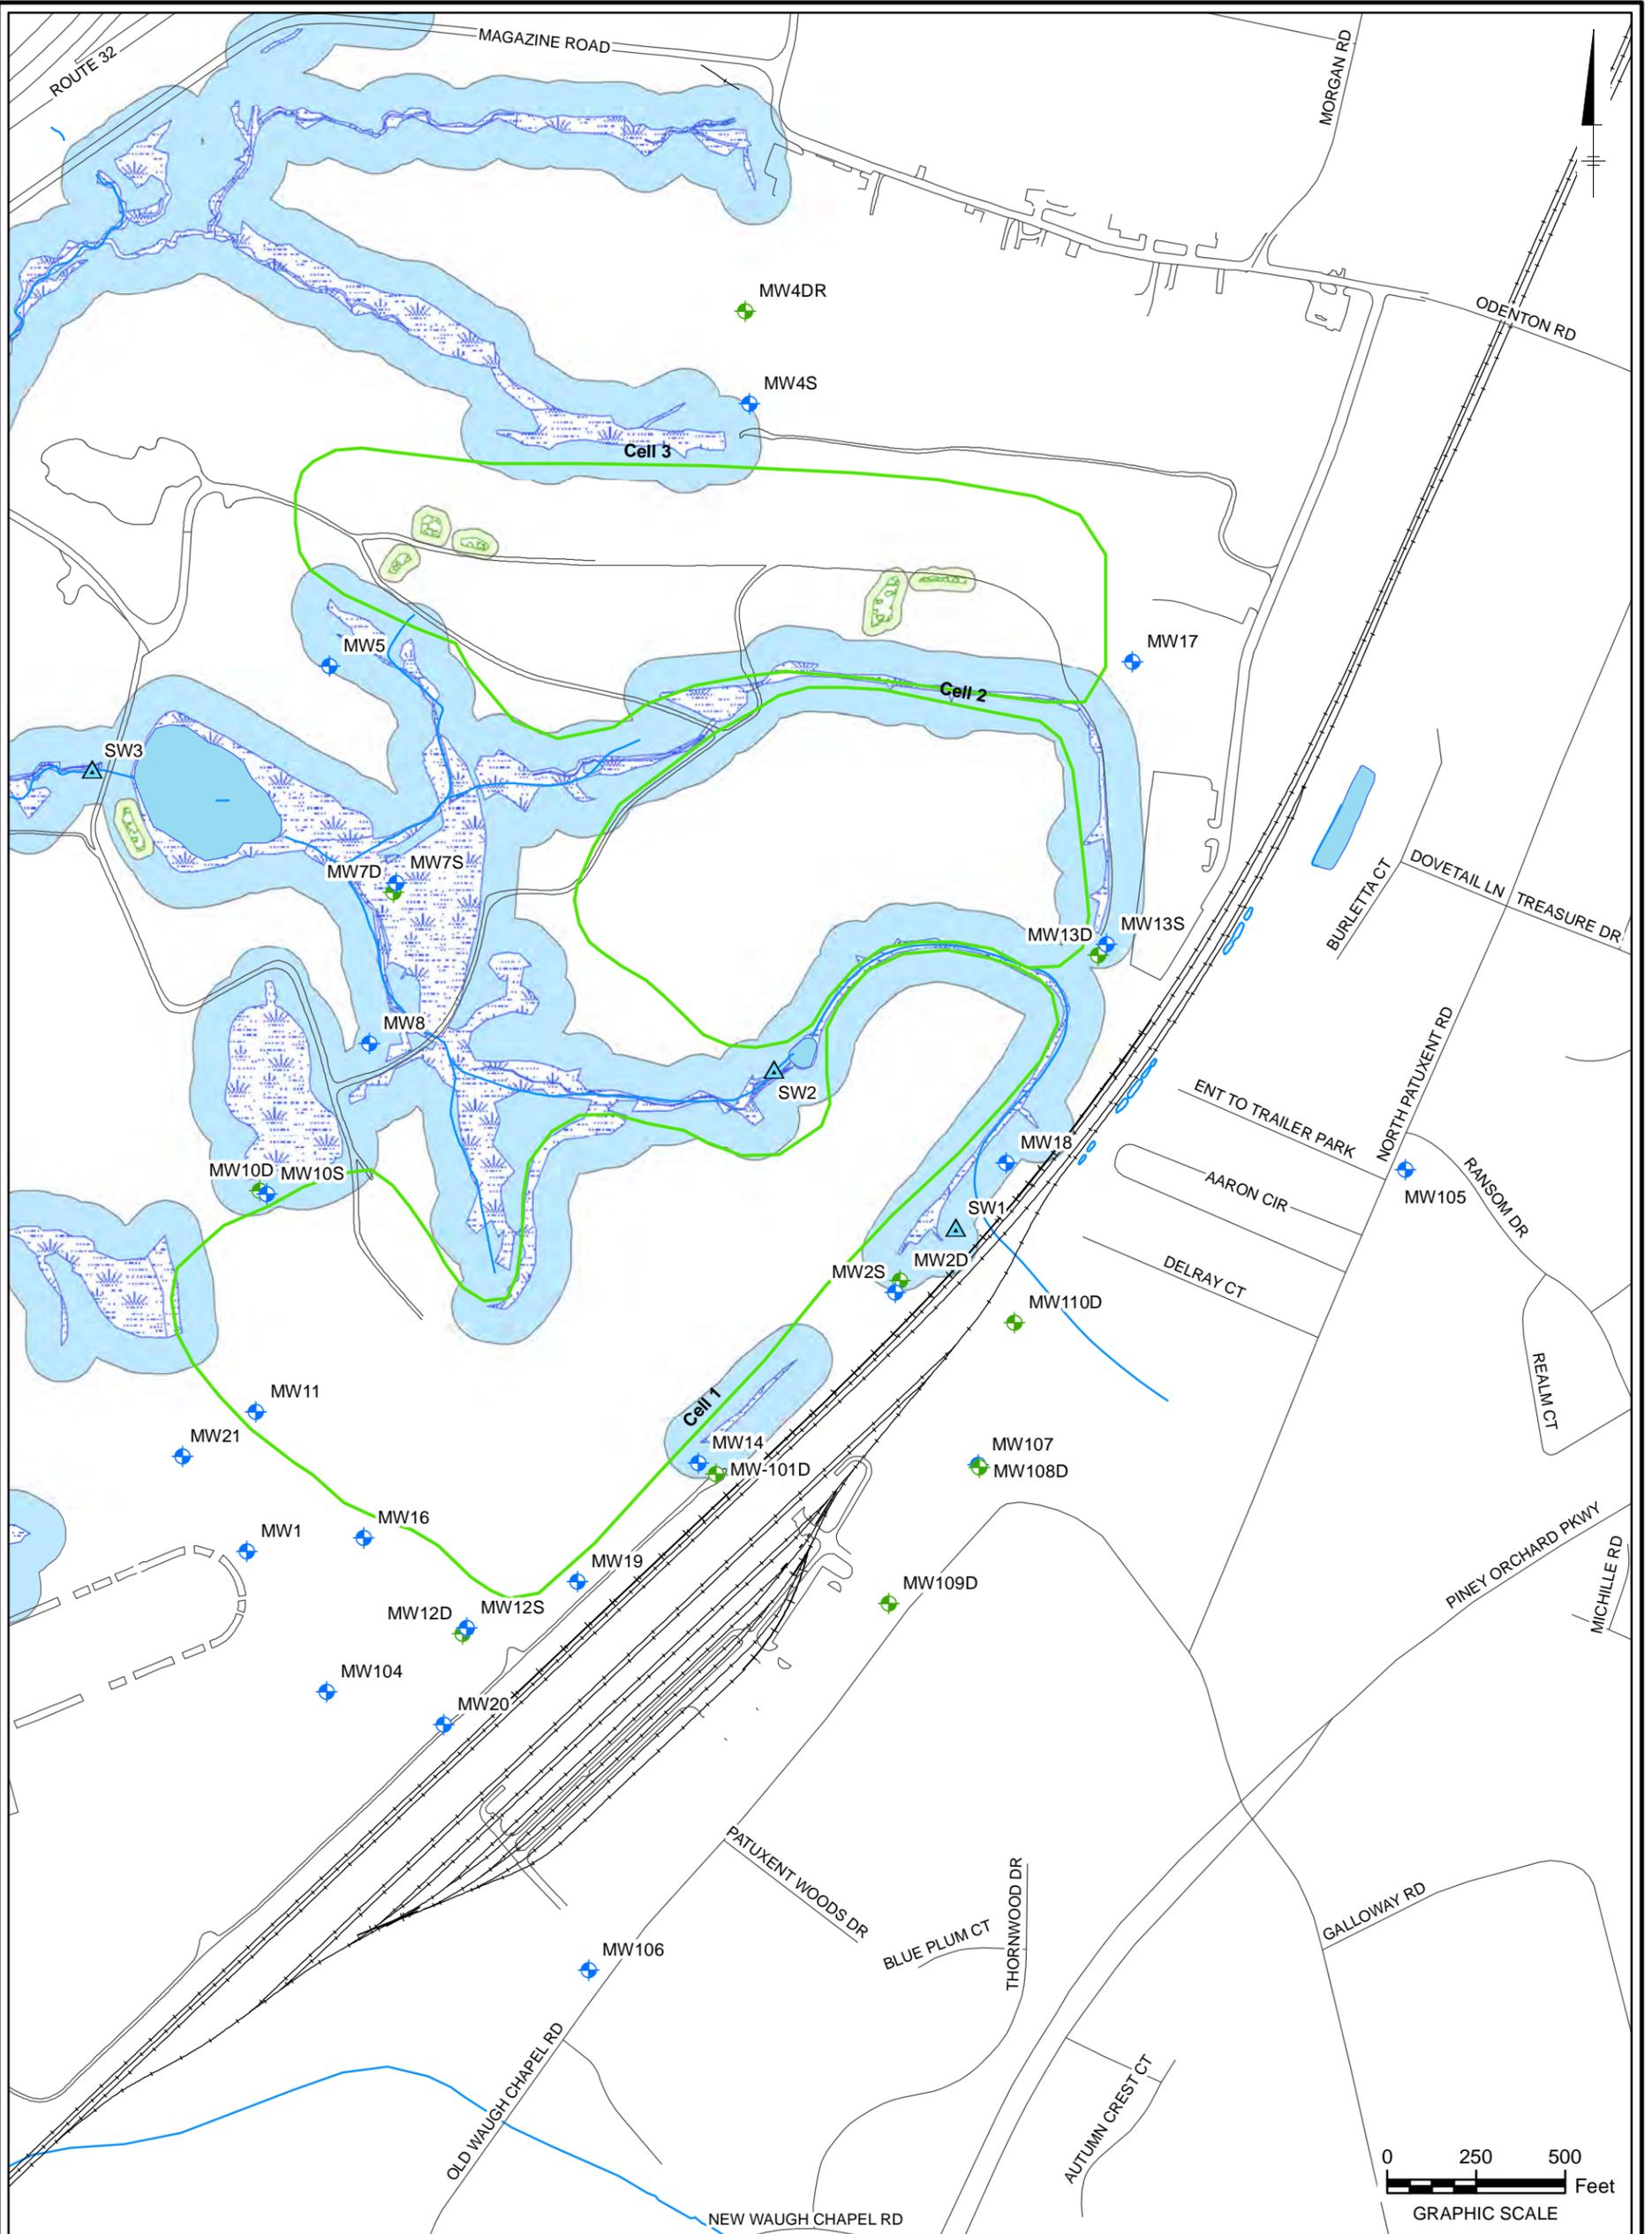


<p>LEGEND:</p> <ul style="list-style-type: none"> UPPER AQUIFER WELL LOWER AQUIFER WELL SURFACE WATER LOCATION ROAD RAILROAD APPROXIMATE CELL BOUNDARIES DEMOLISHED STRUCTURES EXISTING STRUCTURES STREAM SURFACE WATER ISOLATED WETLAND (MDE) ISOLATED WETLAND BOUNDARY (25 FT MDE) JURISDICTIONAL WETLANDS & WATERS OF THE UNITED STATES CZM RIPARIAN & WETLAND BUFFER (100 FT BRAC) <p>NOTES: MDE (MARYLAND DEPARTMENT OF THE ENVIRONMENT), FT (FEET), CZM (COASTAL ZONE MANAGEMENT), BRAC (BASE REALIGNMENT AND CLOSURE)</p>
--

FORT GEORGE G. MEADE, MARYLAND

SITE MAP
CLOSED SANITARY LANDFILL

ARCADIS

FIGURE
2

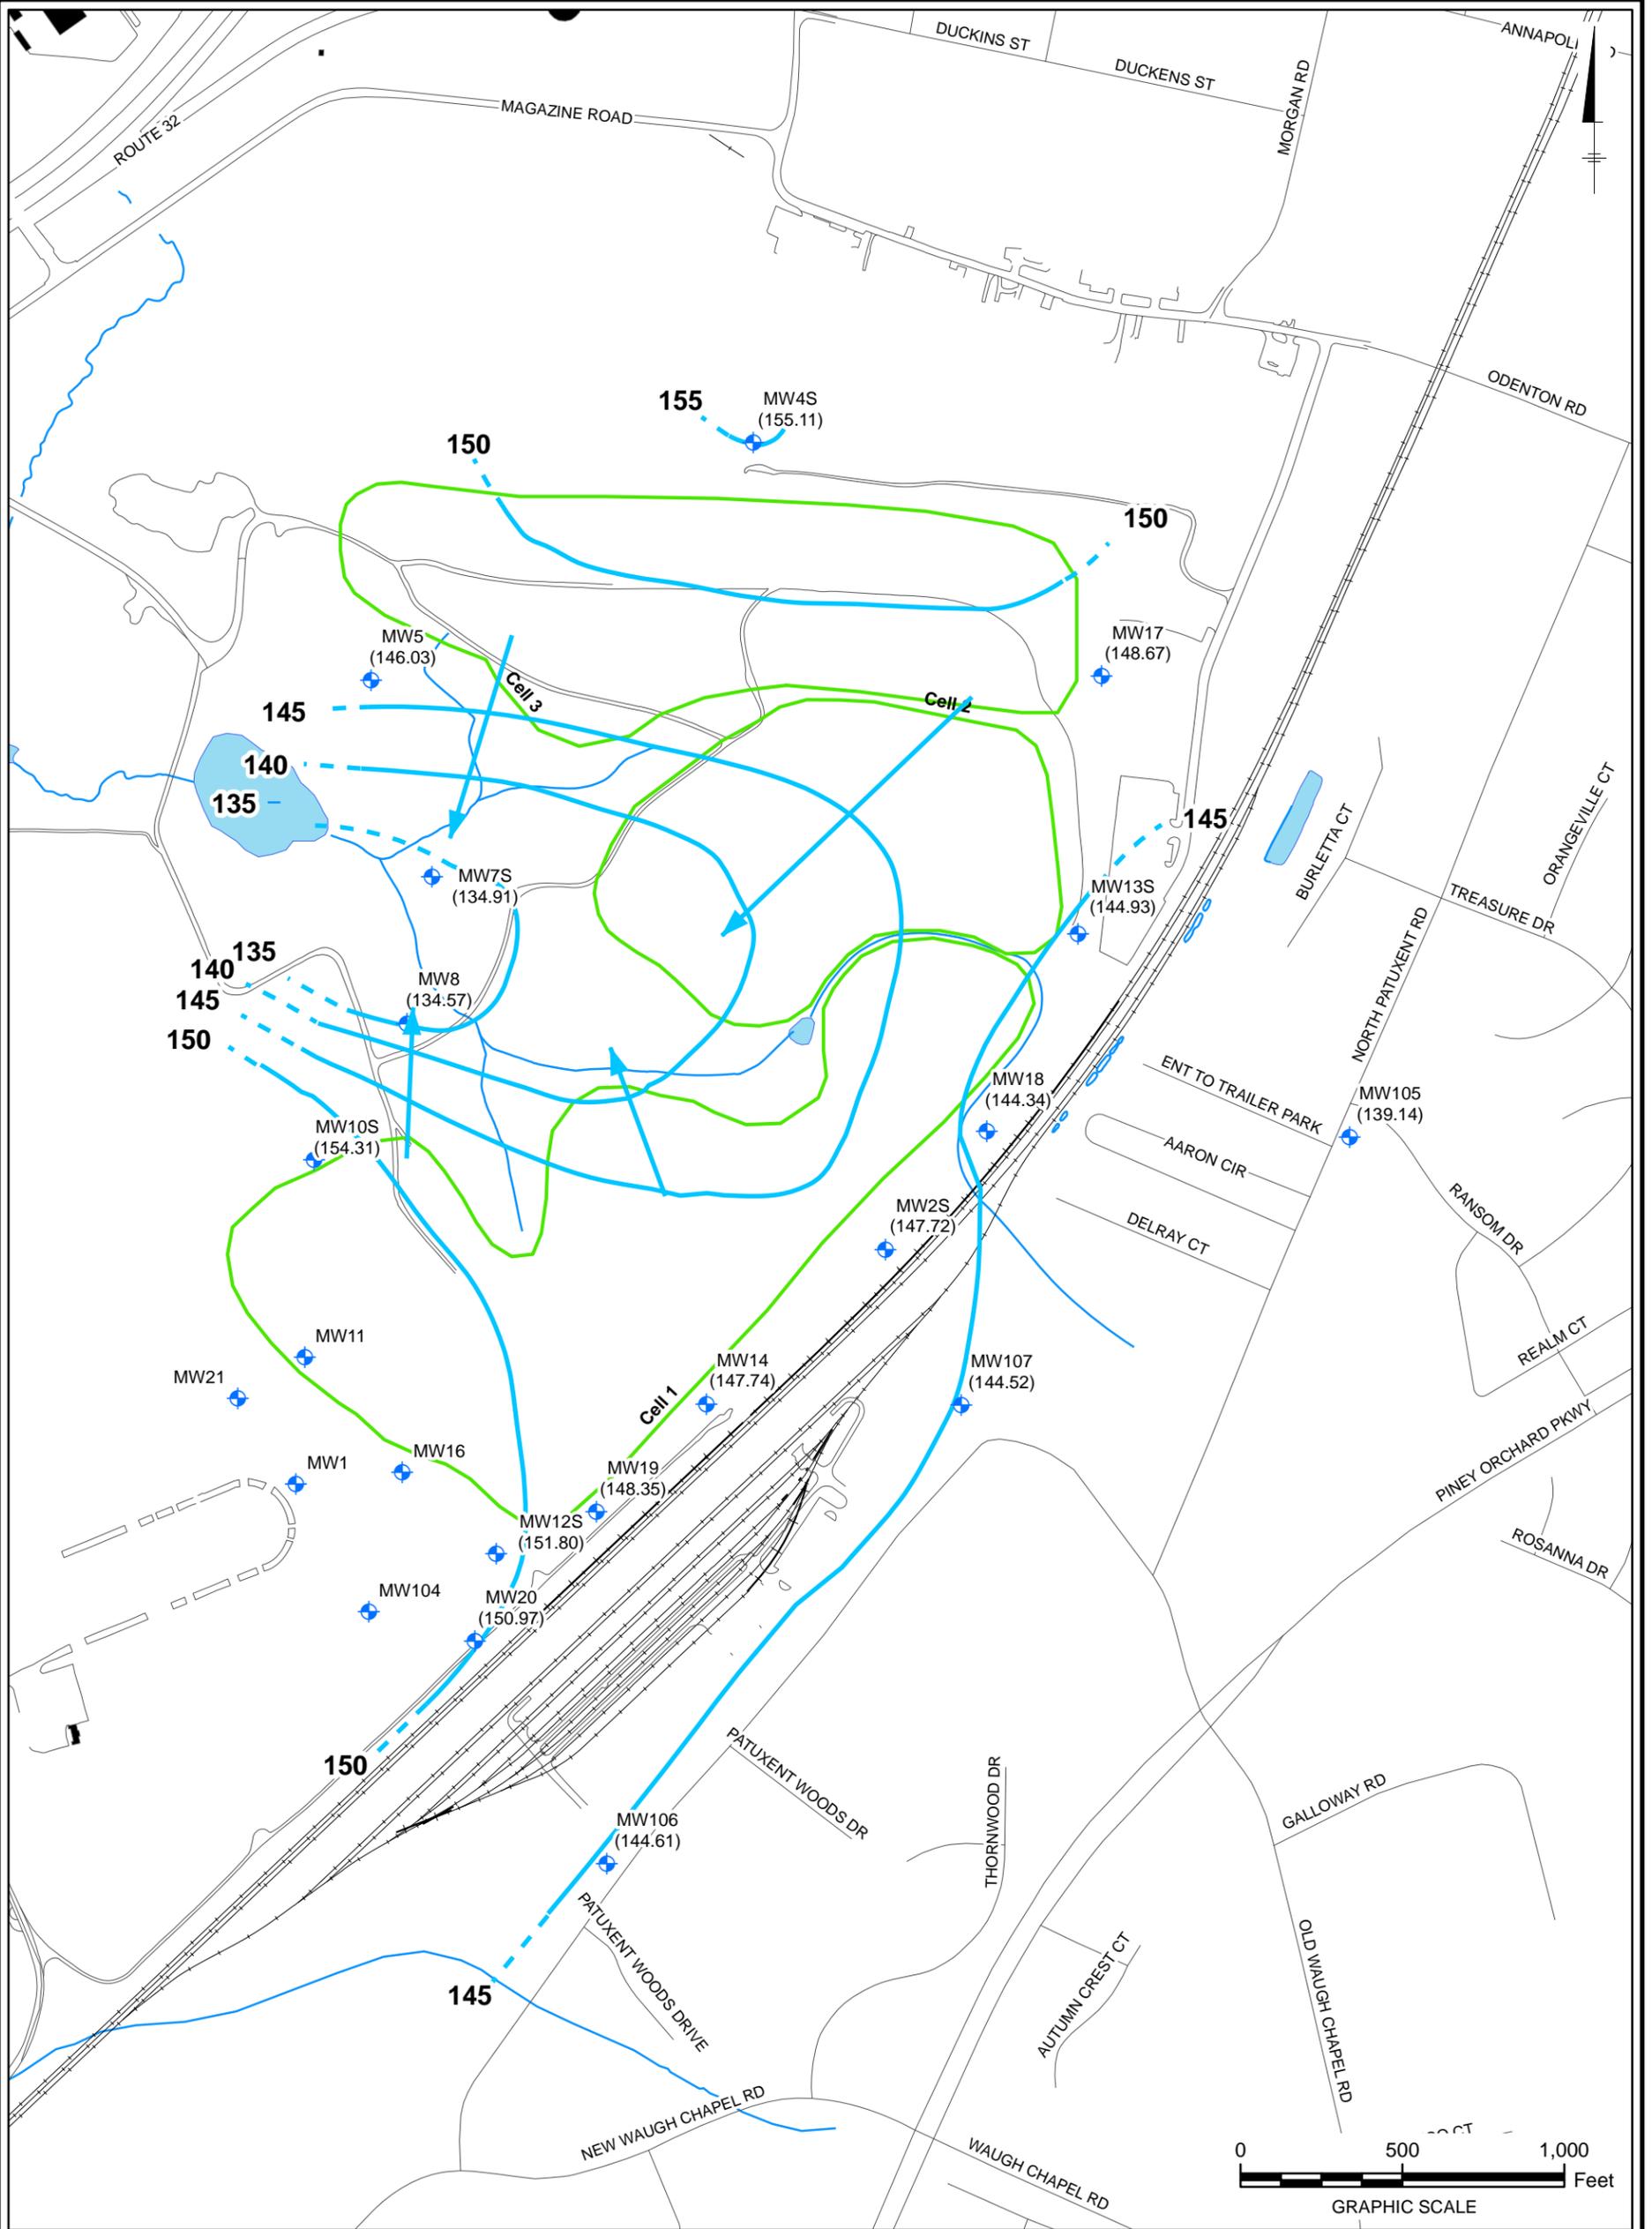

LEGEND:

- ◆ UPPER AQUIFER WELL
- CURB
- APPROXIMATE CELL BOUNDARIES
- ELEVATION CONTOUR (DASHED WHERE INFERRED)
- GROUNDWATER FLOW DIRECTION
- RAILROAD
- STREAM
- SURFACE WATER


NOTE:
 ELEVATIONS PROVIDED IN FT AMSL
 (FEET ABOVE MEAN SEA LEVEL)

CLOSED SANITARY LANDFILL
 FORT GEORGE G. MEADE, MARYLAND

**GROUNDWATER ELEVATIONS
 UPPER PATAPSCO AQUIFER - MARCH 2014
 CLOSED SANITARY LANDFILL**



**FIGURE
 3**

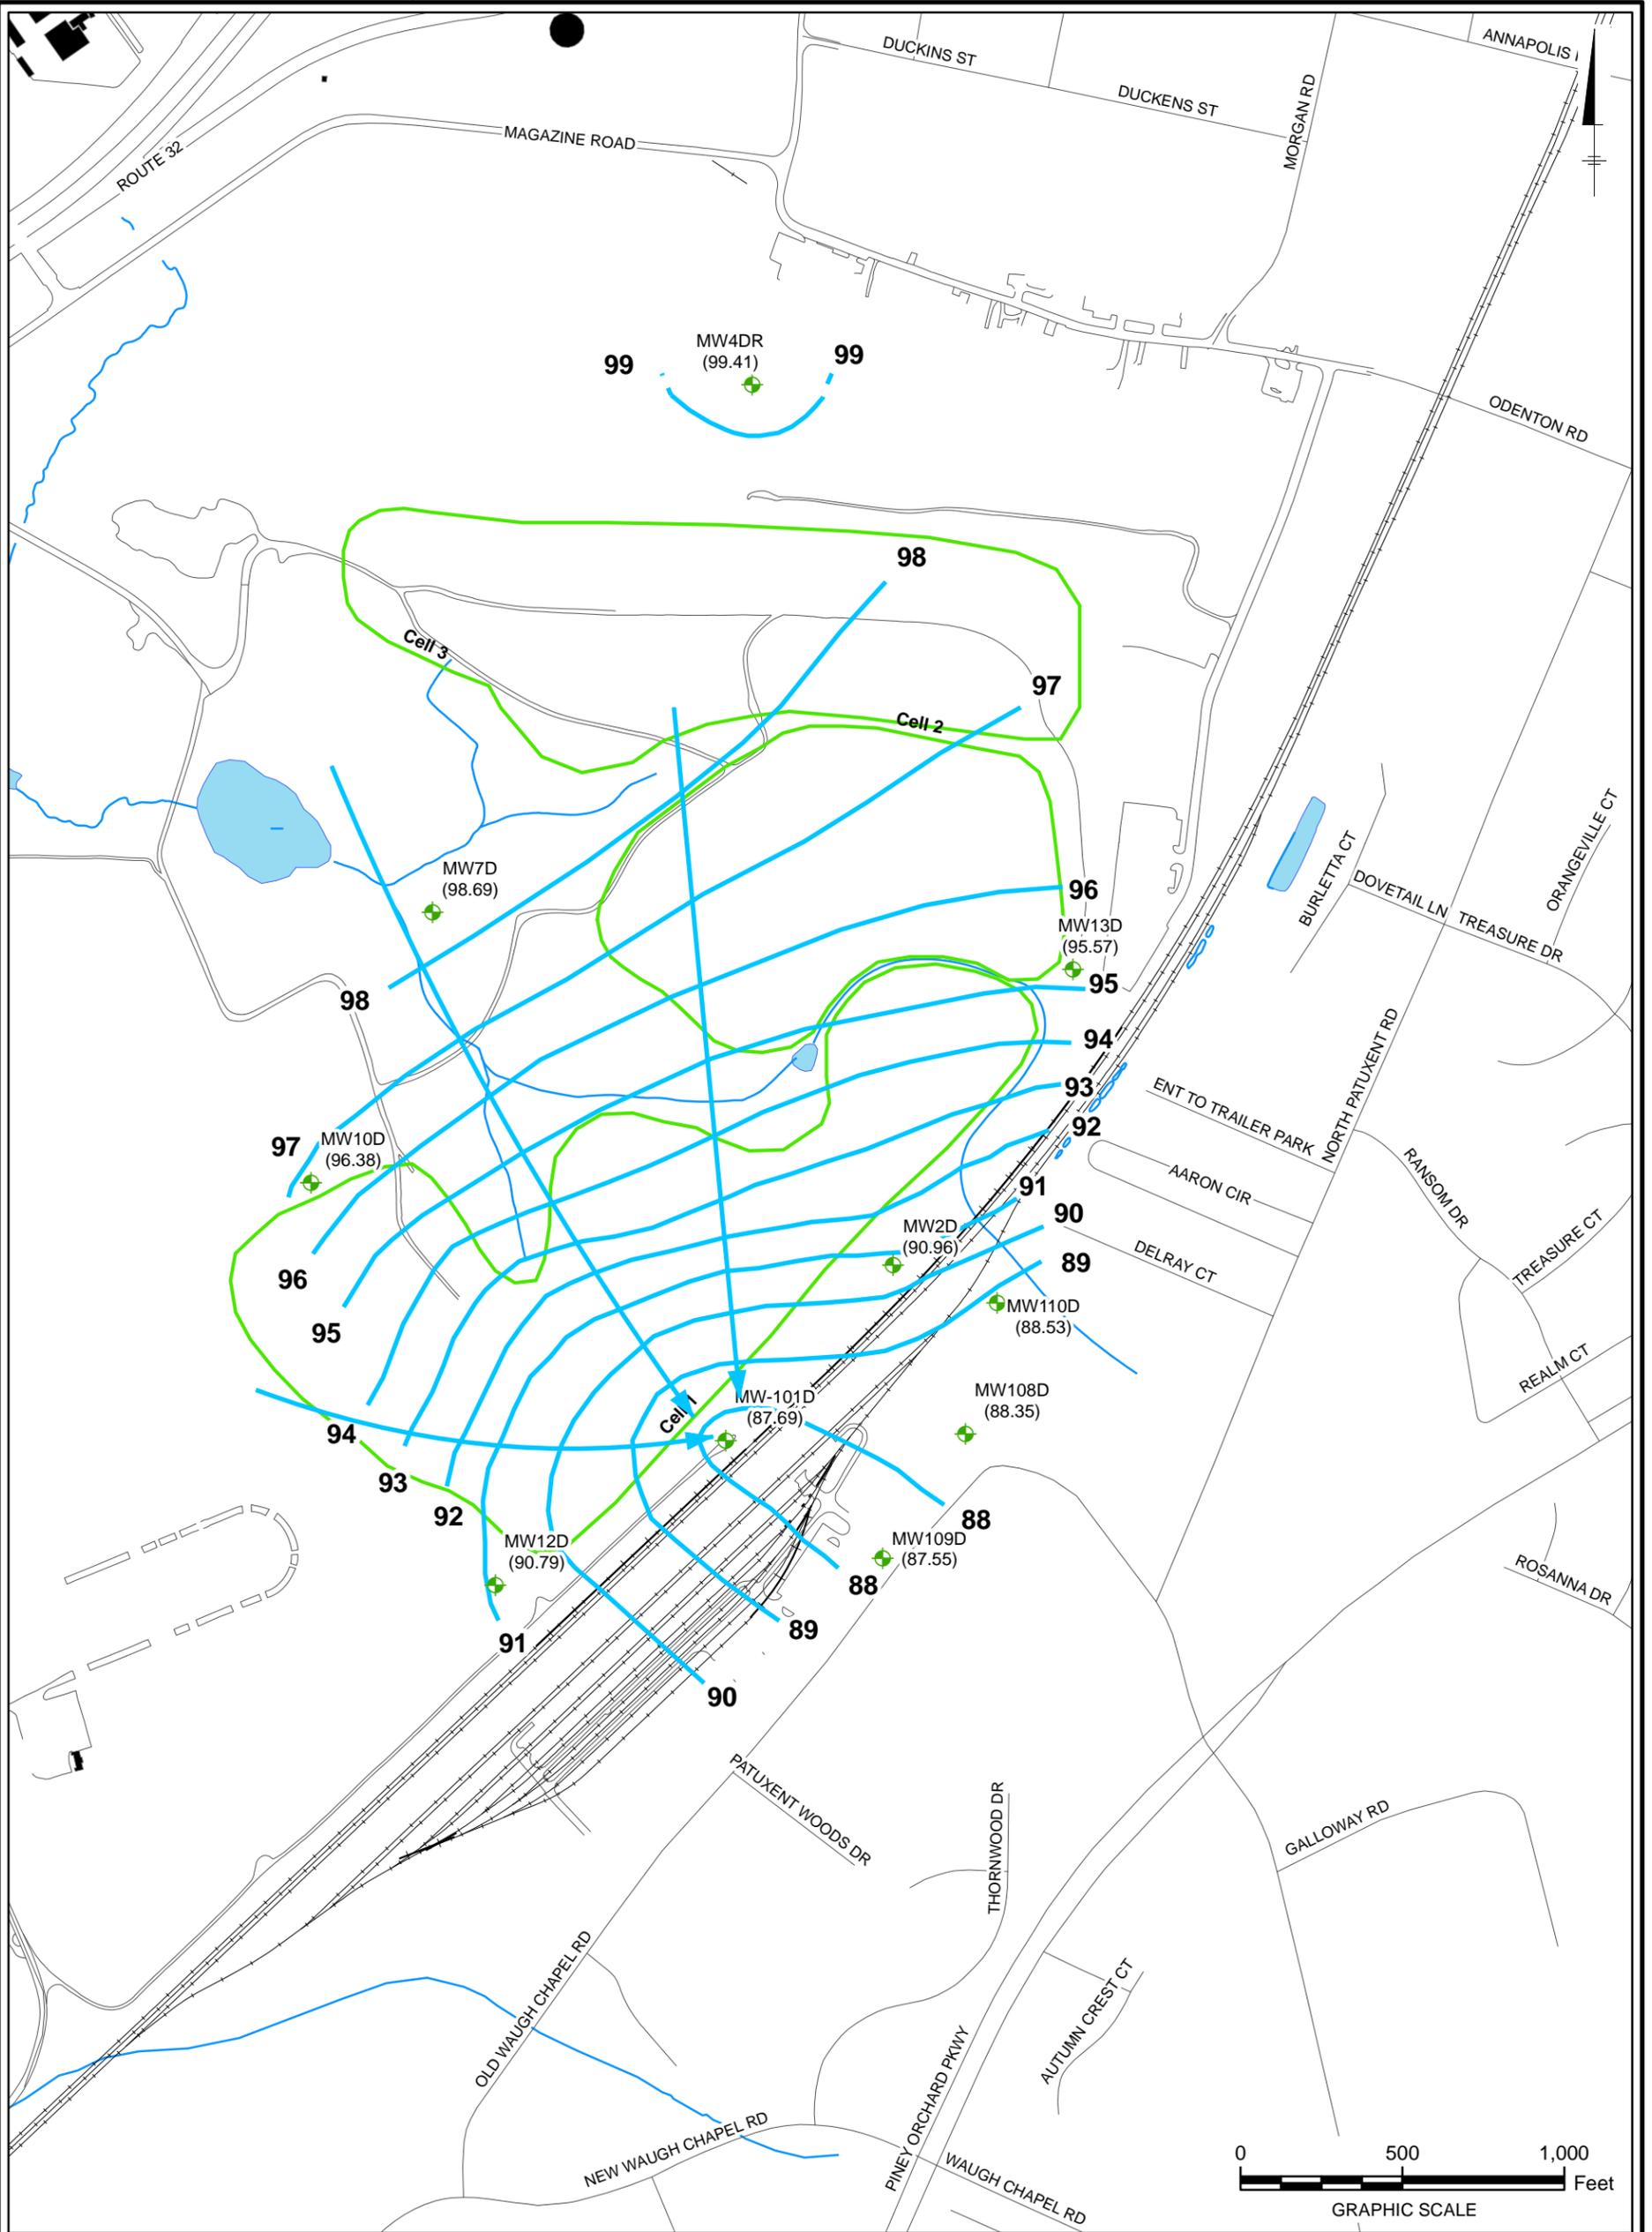

- LEGEND:**
- ◆ LOWER AQUIFER WELL
 - CURB
 - APPROXIMATE CELL BOUNDARIES
 - ELEVATION CONTOUR (DASHED WHERE INFERRED)
 - GROUNDWATER FLOW DIRECTION
 - RAILROAD
 - STREAM
 - SURFACE WATER


NOTE:
 ELEVATIONS PROVIDED IN FT AMSL
 (FEET ABOVE MEAN SEA LEVEL)

CLOSED SANITARY LANDFILL
 FORT GEORGE G. MEADE, MARYLAND

**GROUNDWATER ELEVATIONS
 LOWER PATAPSCO AQUIFER - MARCH 2014
 CLOSED SANITARY LANDFILL**



FIGURE
4

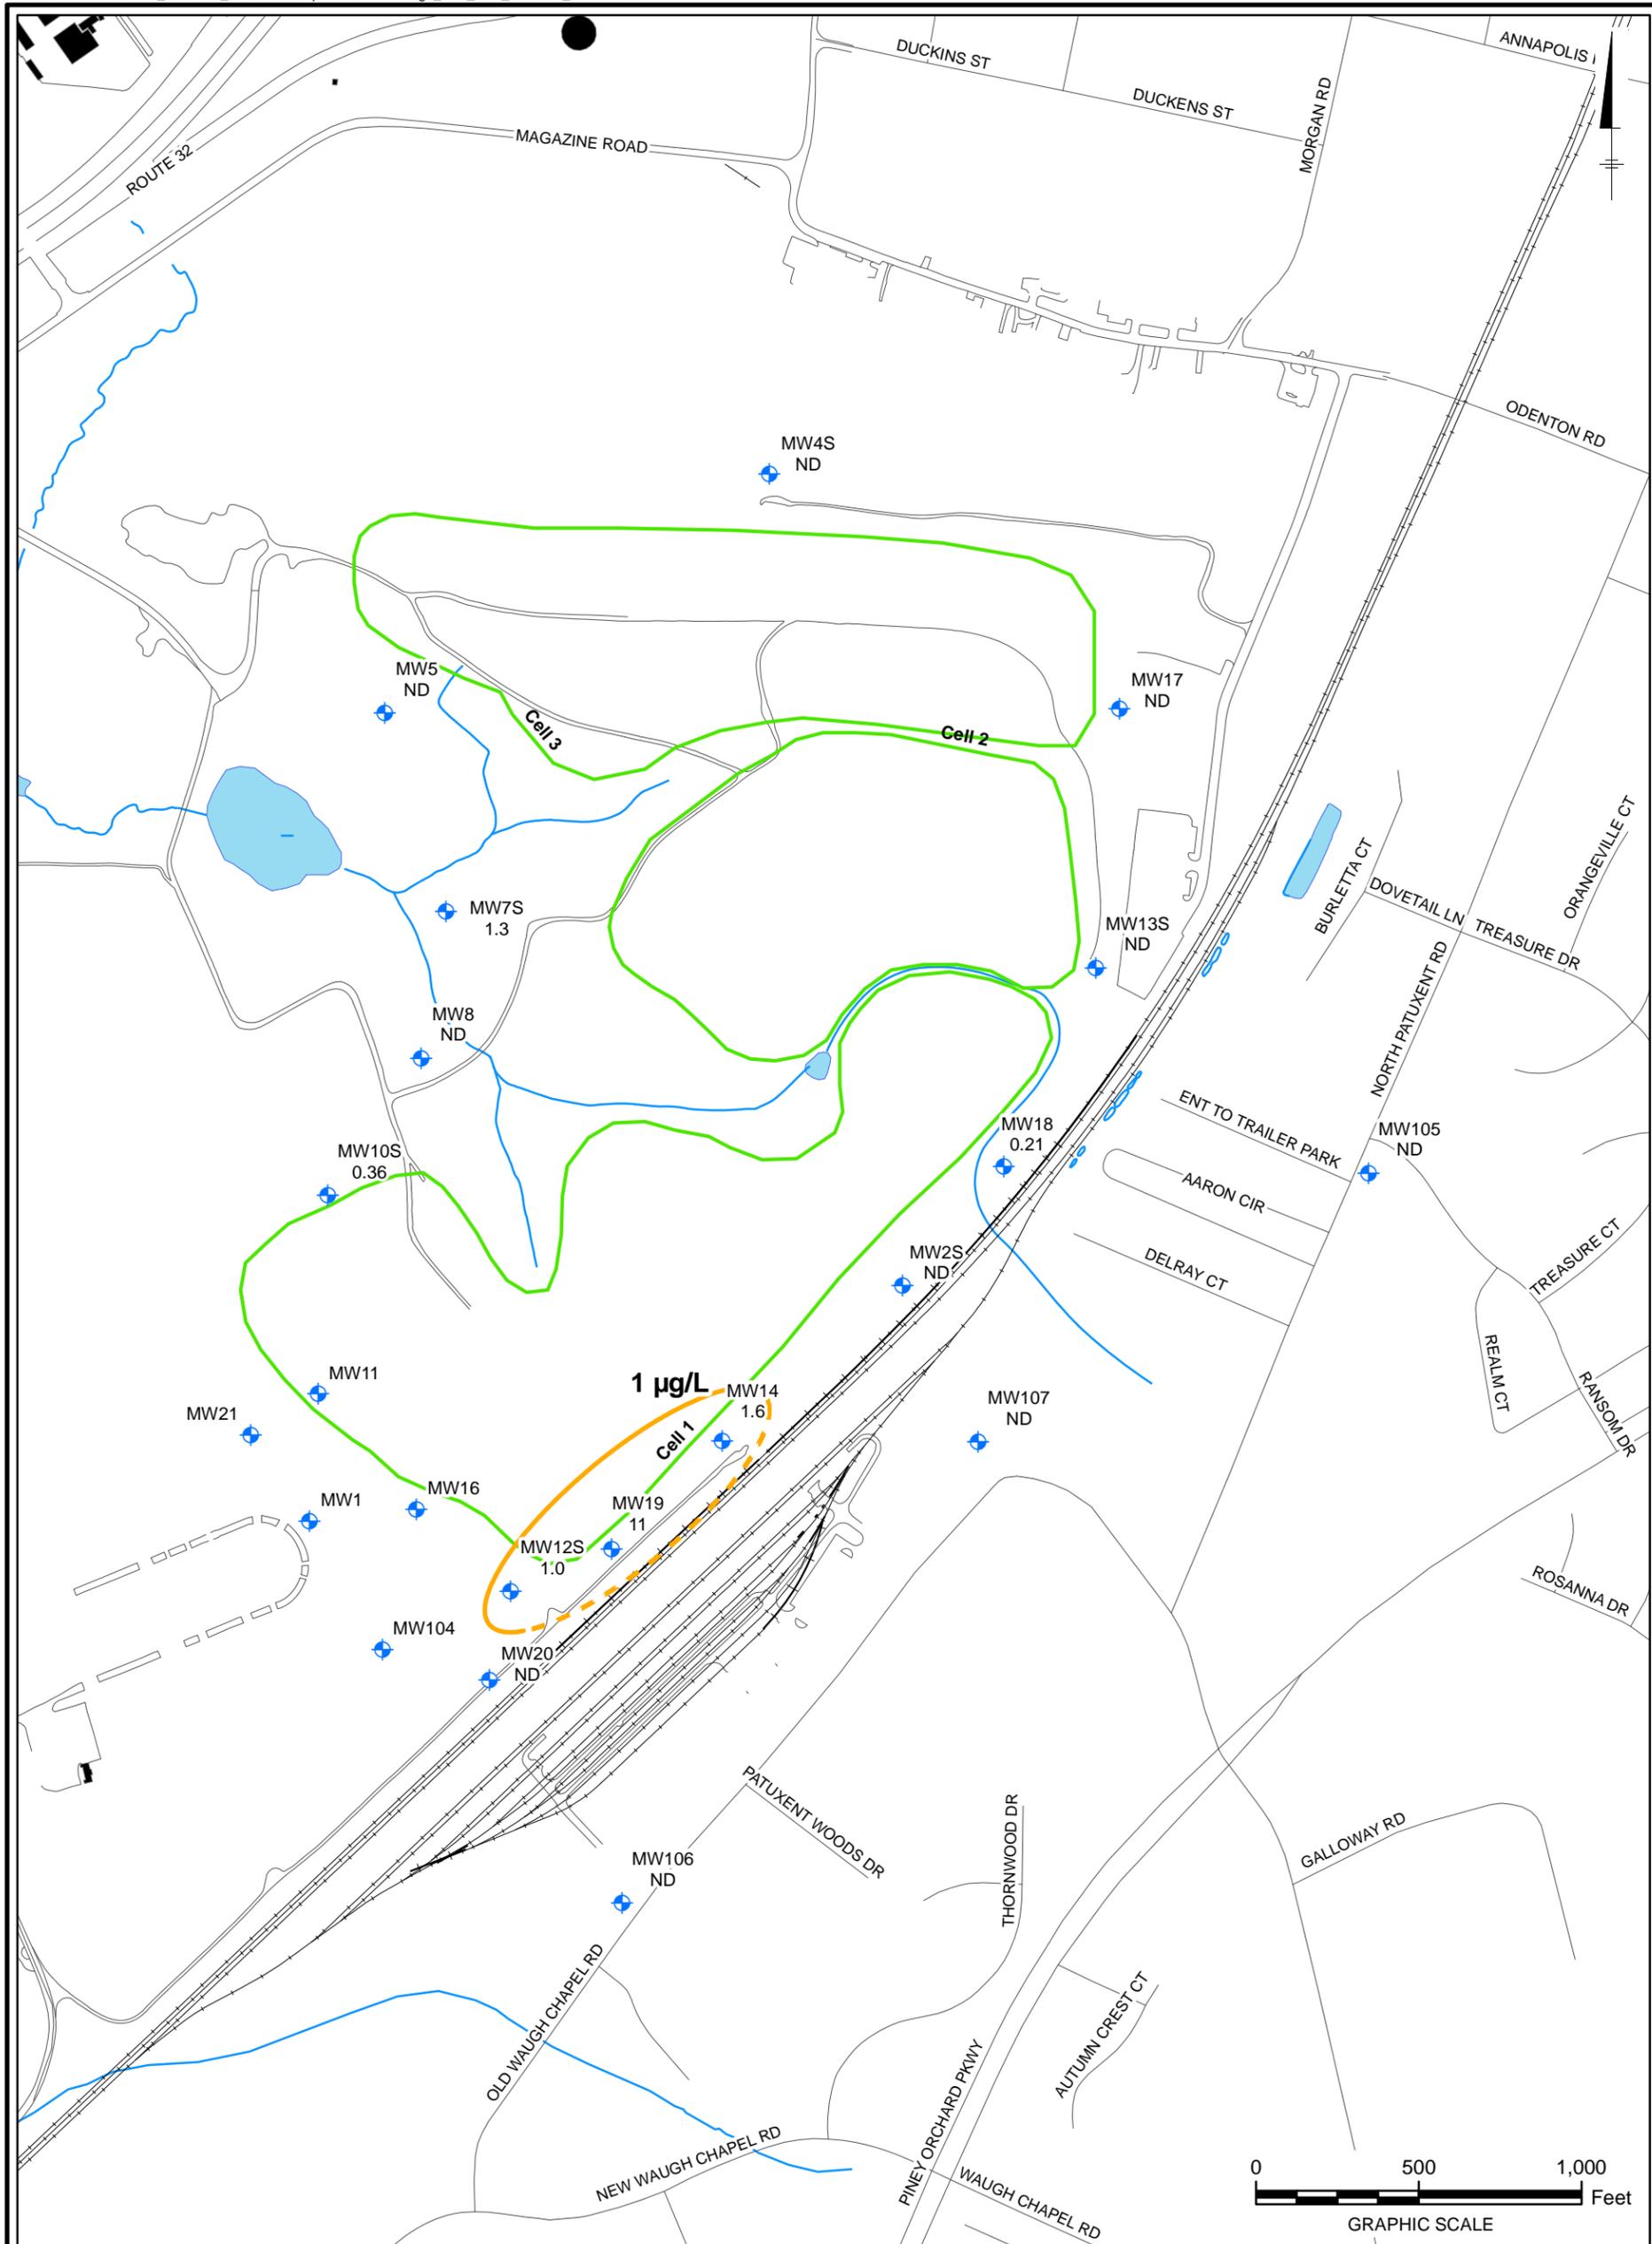

LEGEND:

- ◆ UPPER AQUIFER WELL
- CURB
- APPROXIMATE CELL BOUNDARIES
- BENZENE CONTOUR
- RAILROAD
- STREAM
- SURFACE WATER


NOTE:
 ND = NOT DETECTED
 J = ESTIMATED CONCENTRATION
 µg/L = MICROGRAMS PER LITER

CLOSED SANITARY LANDFILL
 FORT GEORGE G. MEADE, MARYLAND

BENZENE DETECTIONS (µg/L)
UPPER PATAPSCO AQUIFER - MARCH 2014
CLOSED SANITARY LANDFILL



FIGURE
5

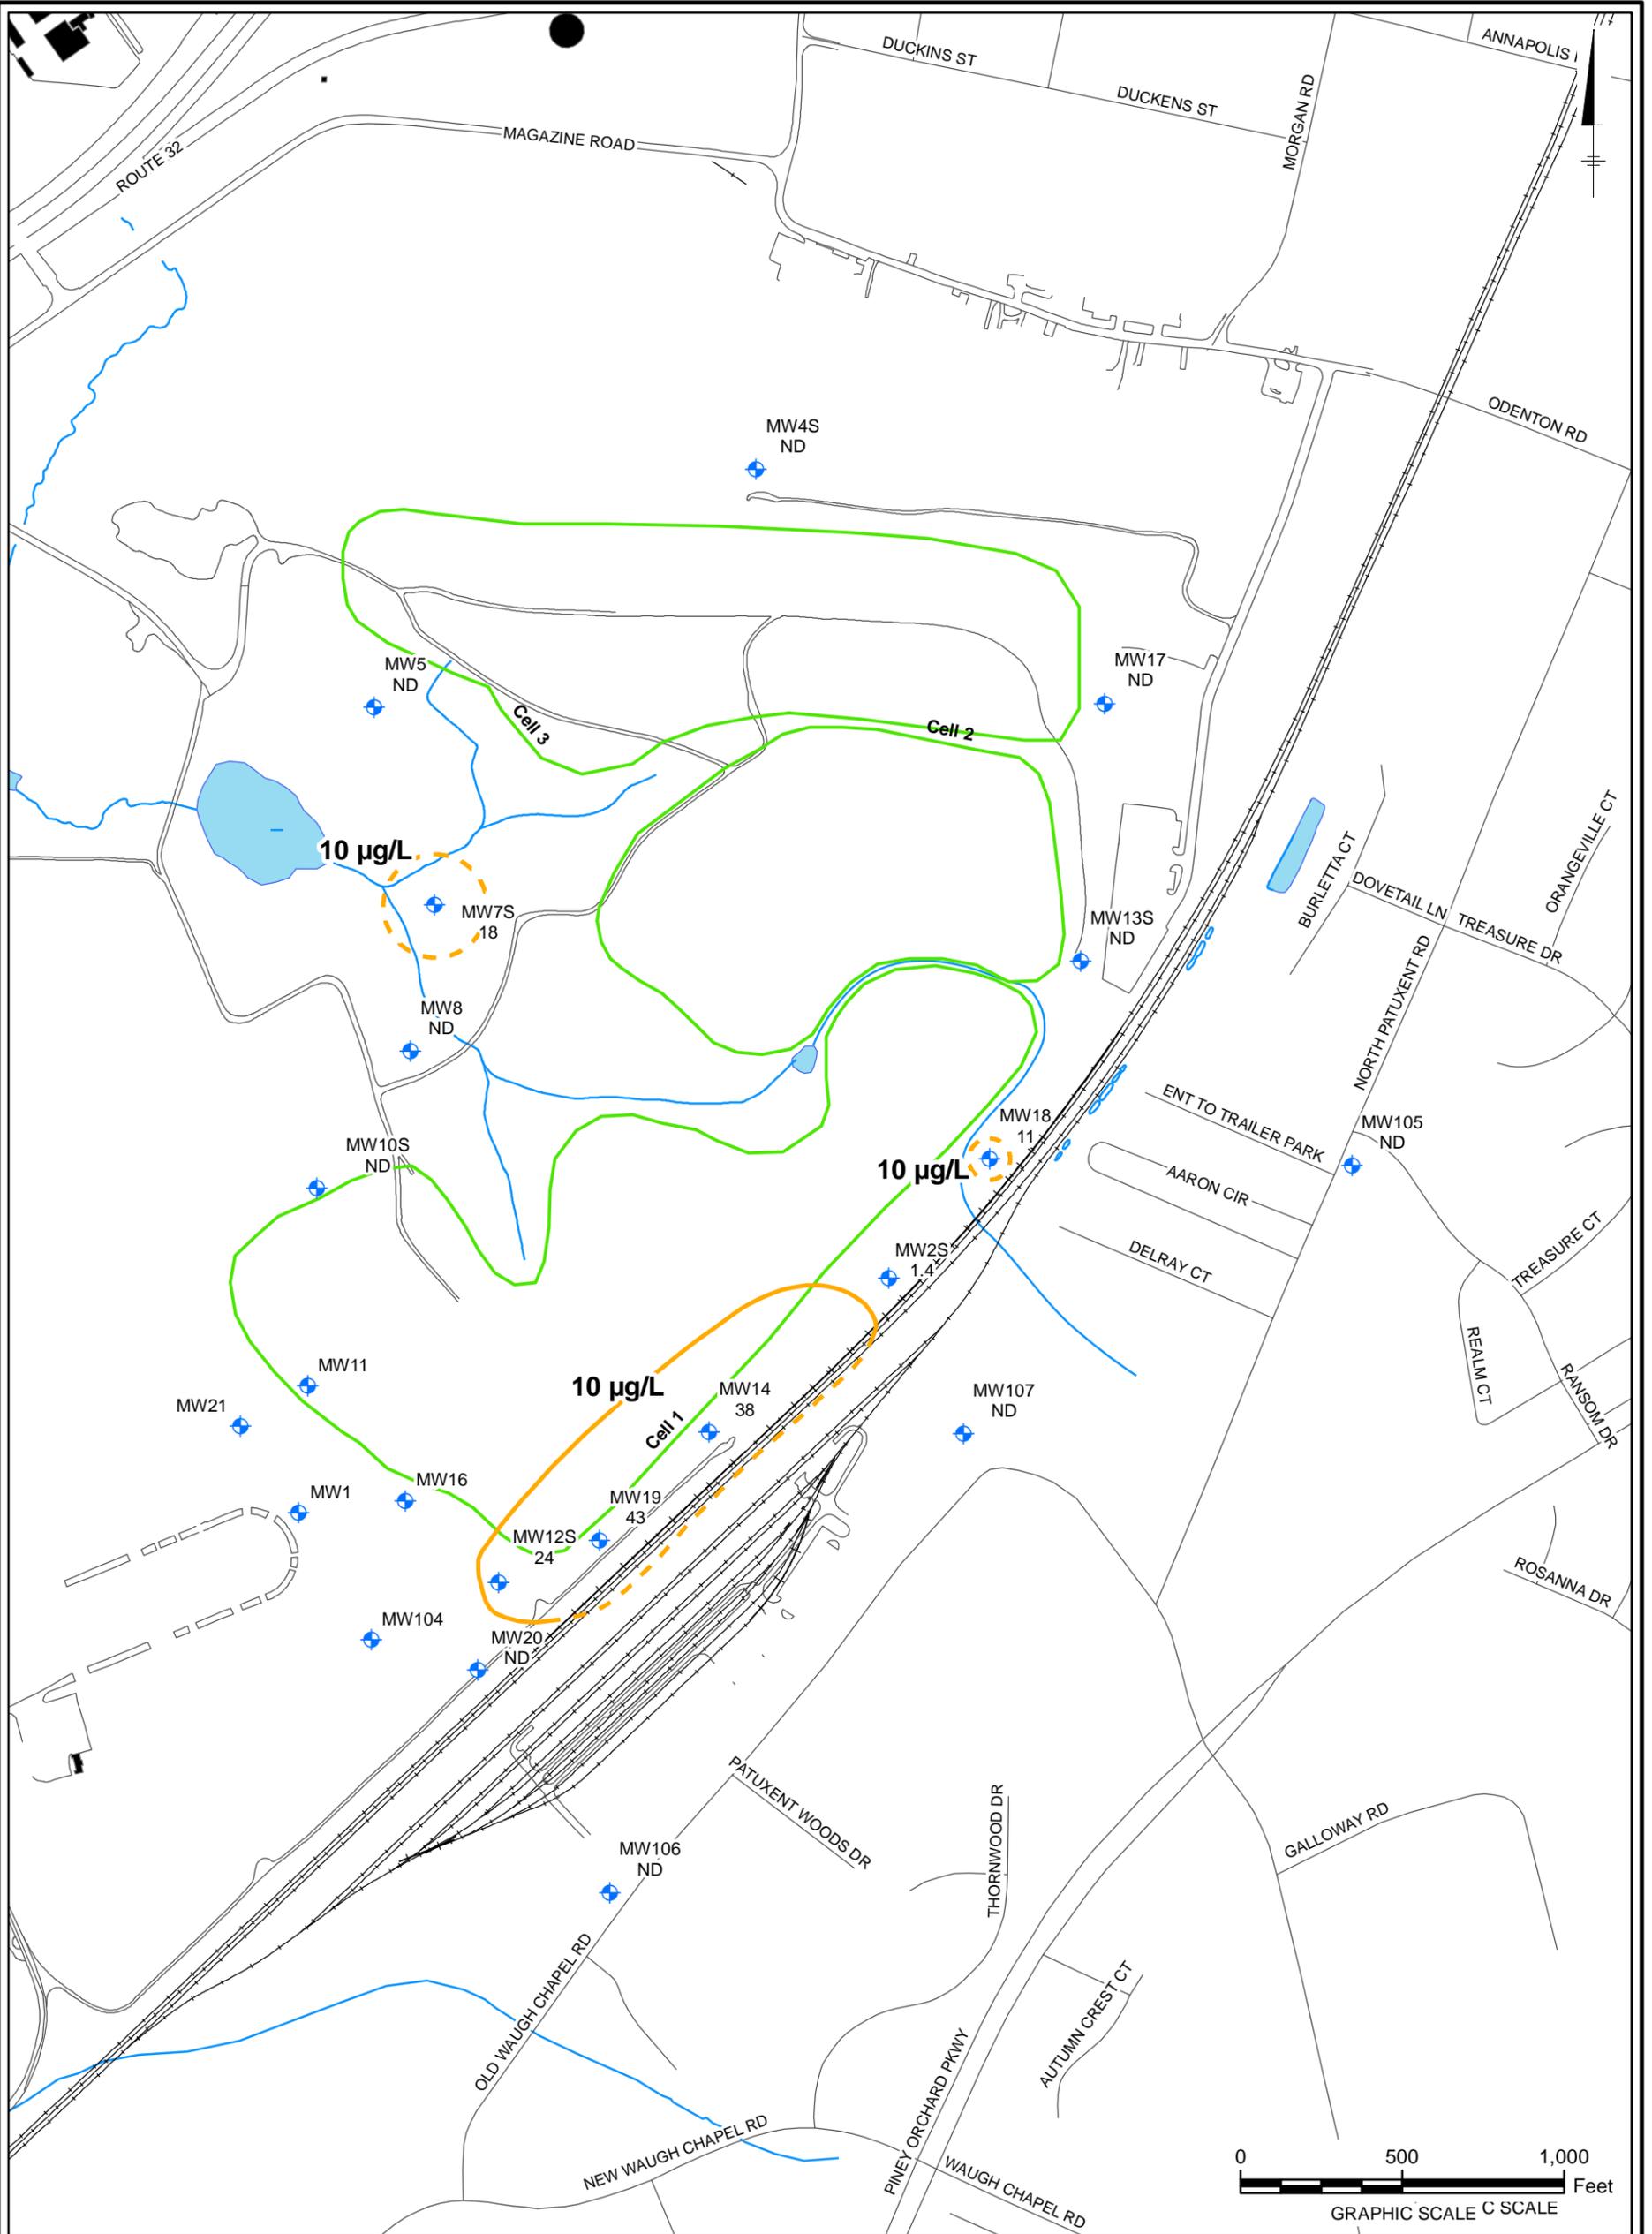

LEGEND:

- ◆ UPPER AQUIFER WELL
- CURB
- APPROXIMATE CELL BOUNDARIES
- ARSENIC CONTOUR
- RAILROAD
- STREAM
- SURFACE WATER

NOTE:
 ND = NOT DETECTED
 J = ESTIMATED CONCENTRATION
 µg/L = MICROGRAMS PER LITER


CLOSED SANITARY LANDFILL
 FORT GEORGE G. MEADE, MARYLAND

ARSENIC CONCENTRATIONS (µg/L)
 UPPER PATAPSCO AQUIFER - MARCH 2014
 CLOSED SANITARY LANDFILL



FIGURE
6

Figure 7
Historical Arsenic Concentrations in the Upper Patapsco Aquifer

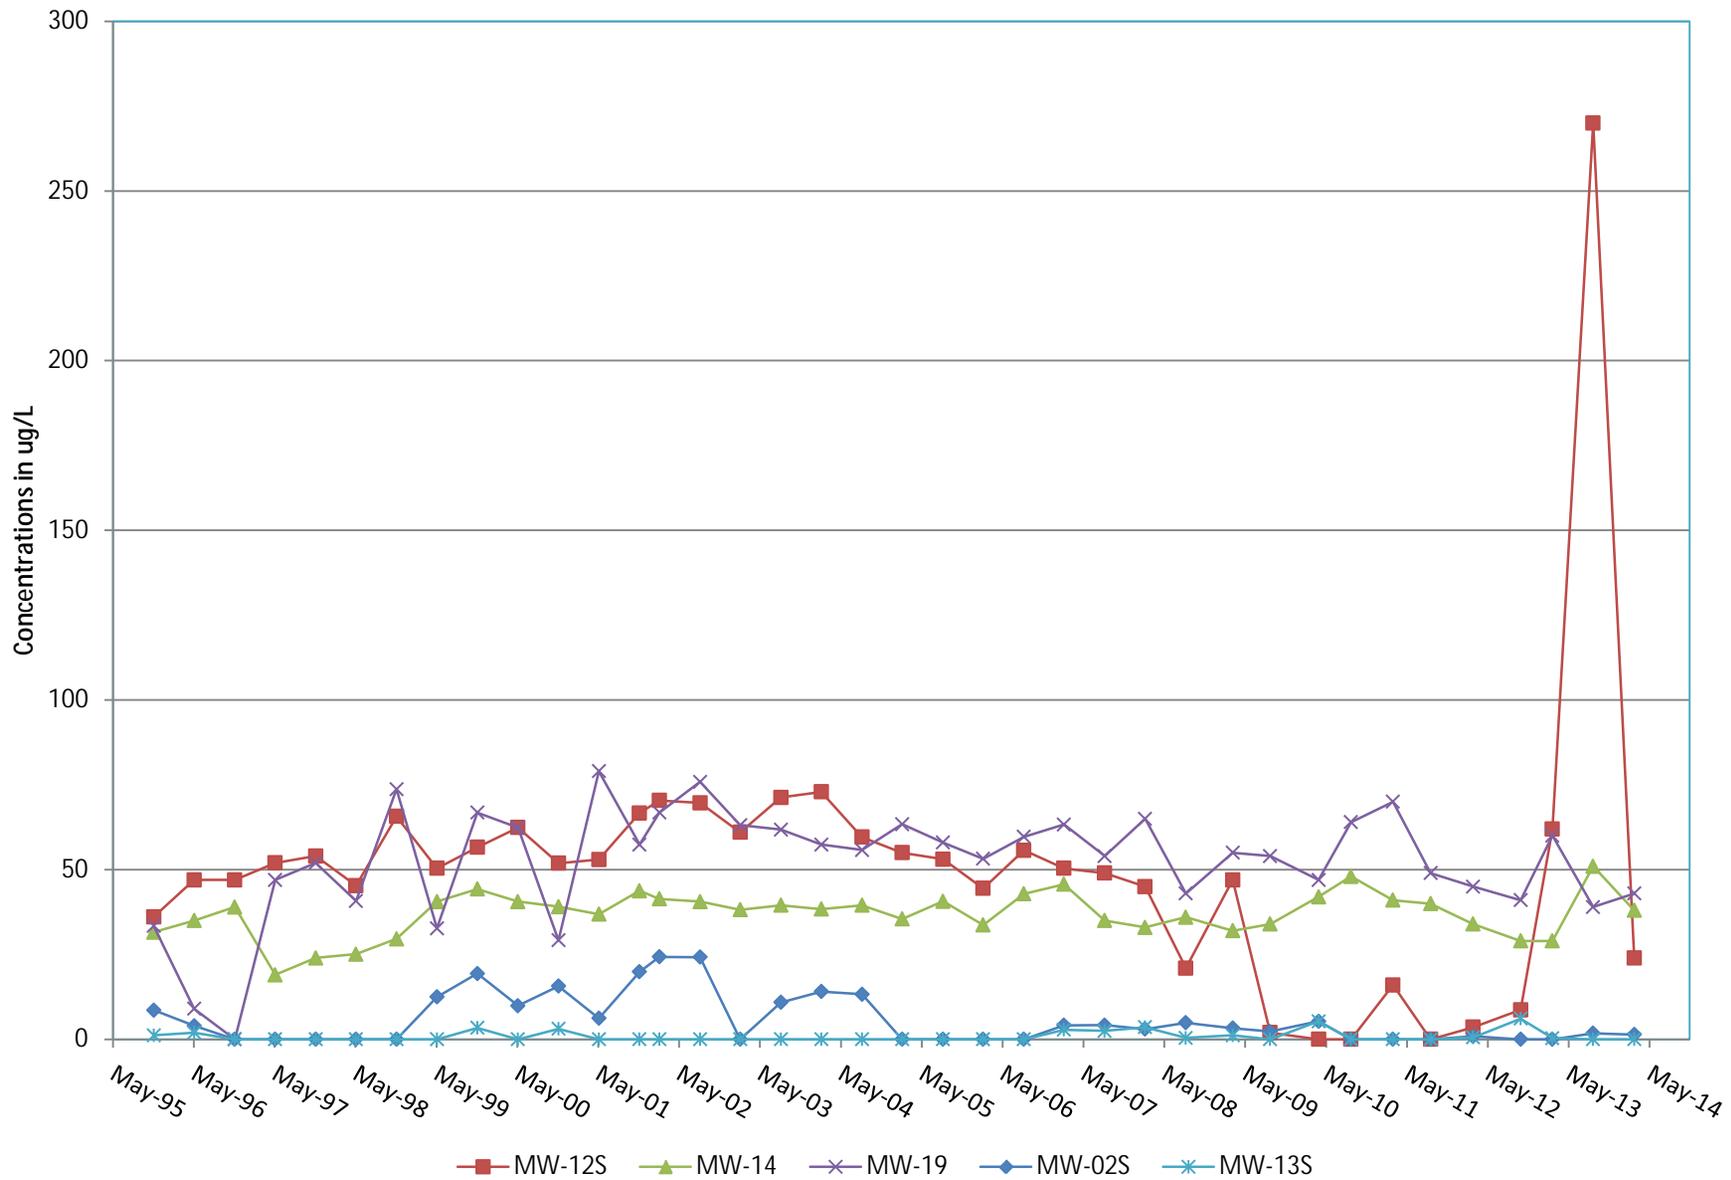

Recent data at MW12S is a historic maximum and this concentration appears to be an outlier.

Figure 8
Historical Benzene Concentrations in the Upper Patapsco Aquifer


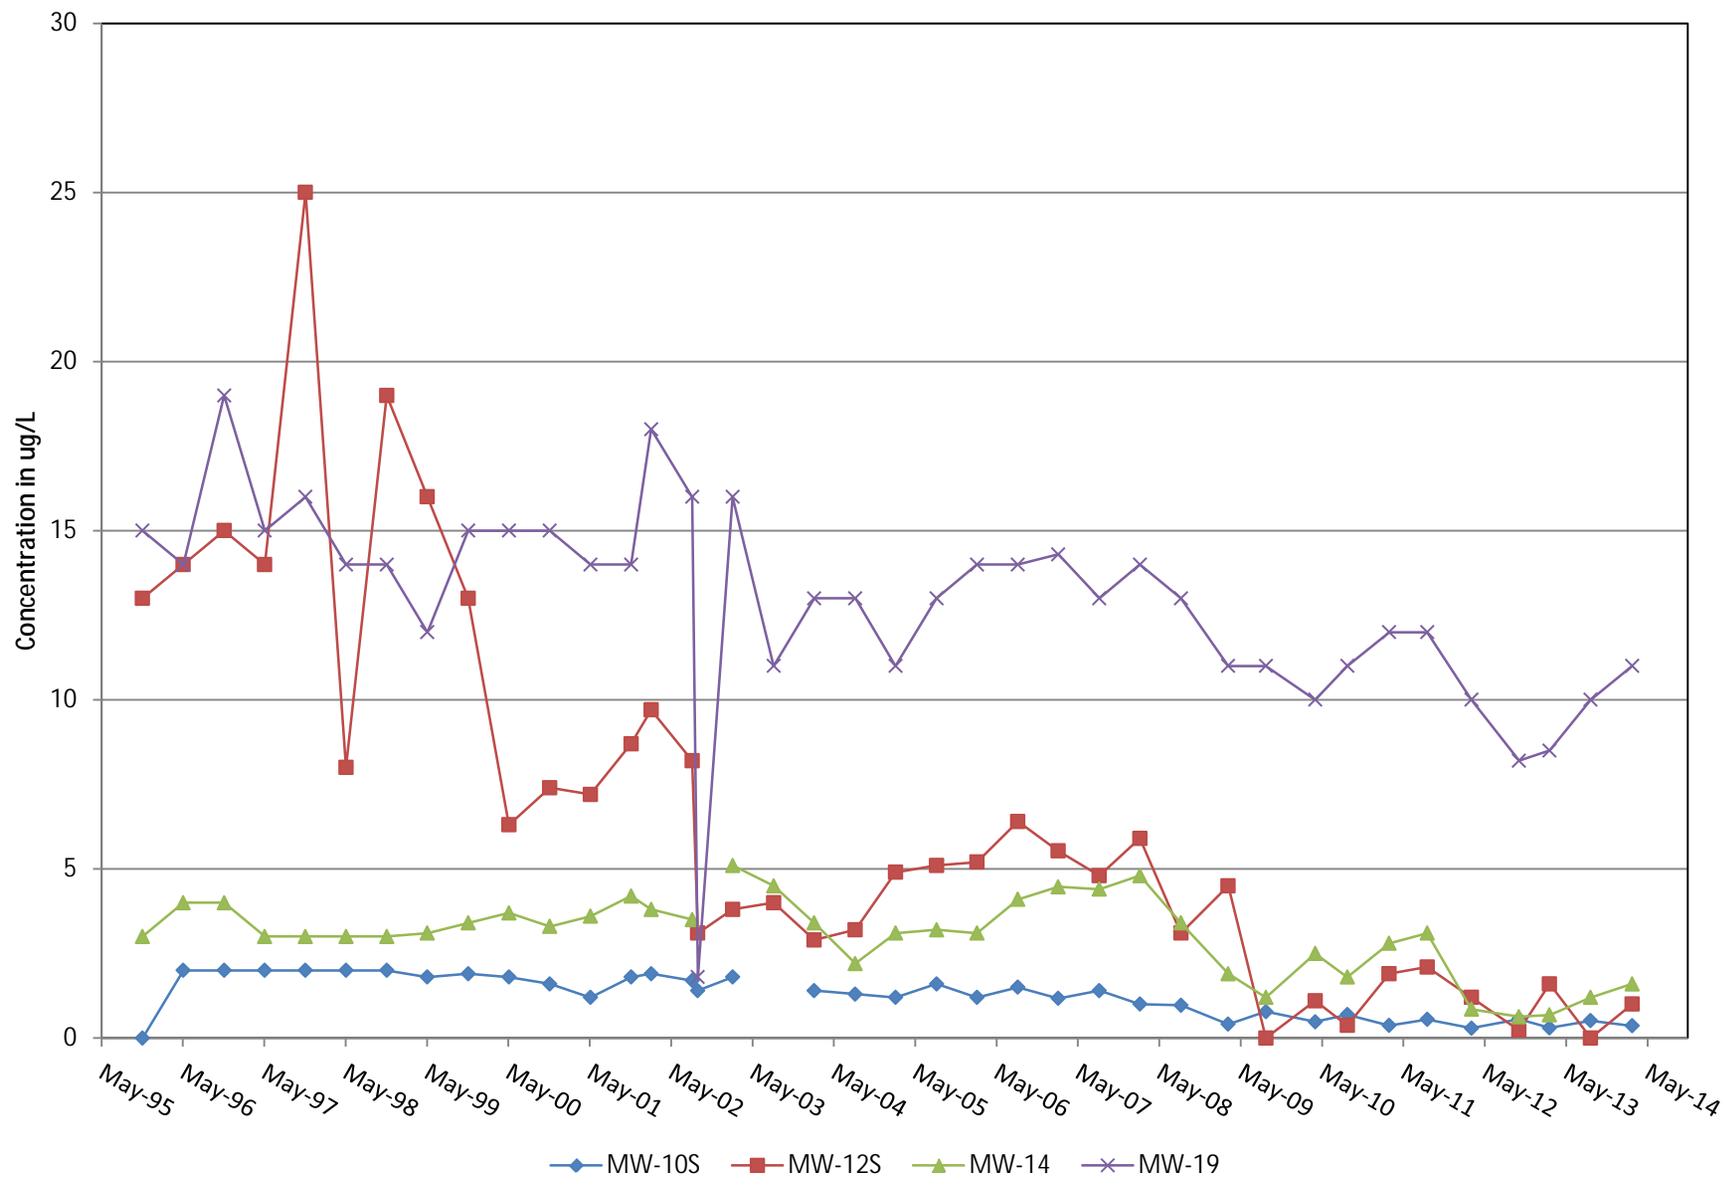


Figure 9
Historical Tetrachloroethene Concentrations in the Lower Patapsco Aquifer

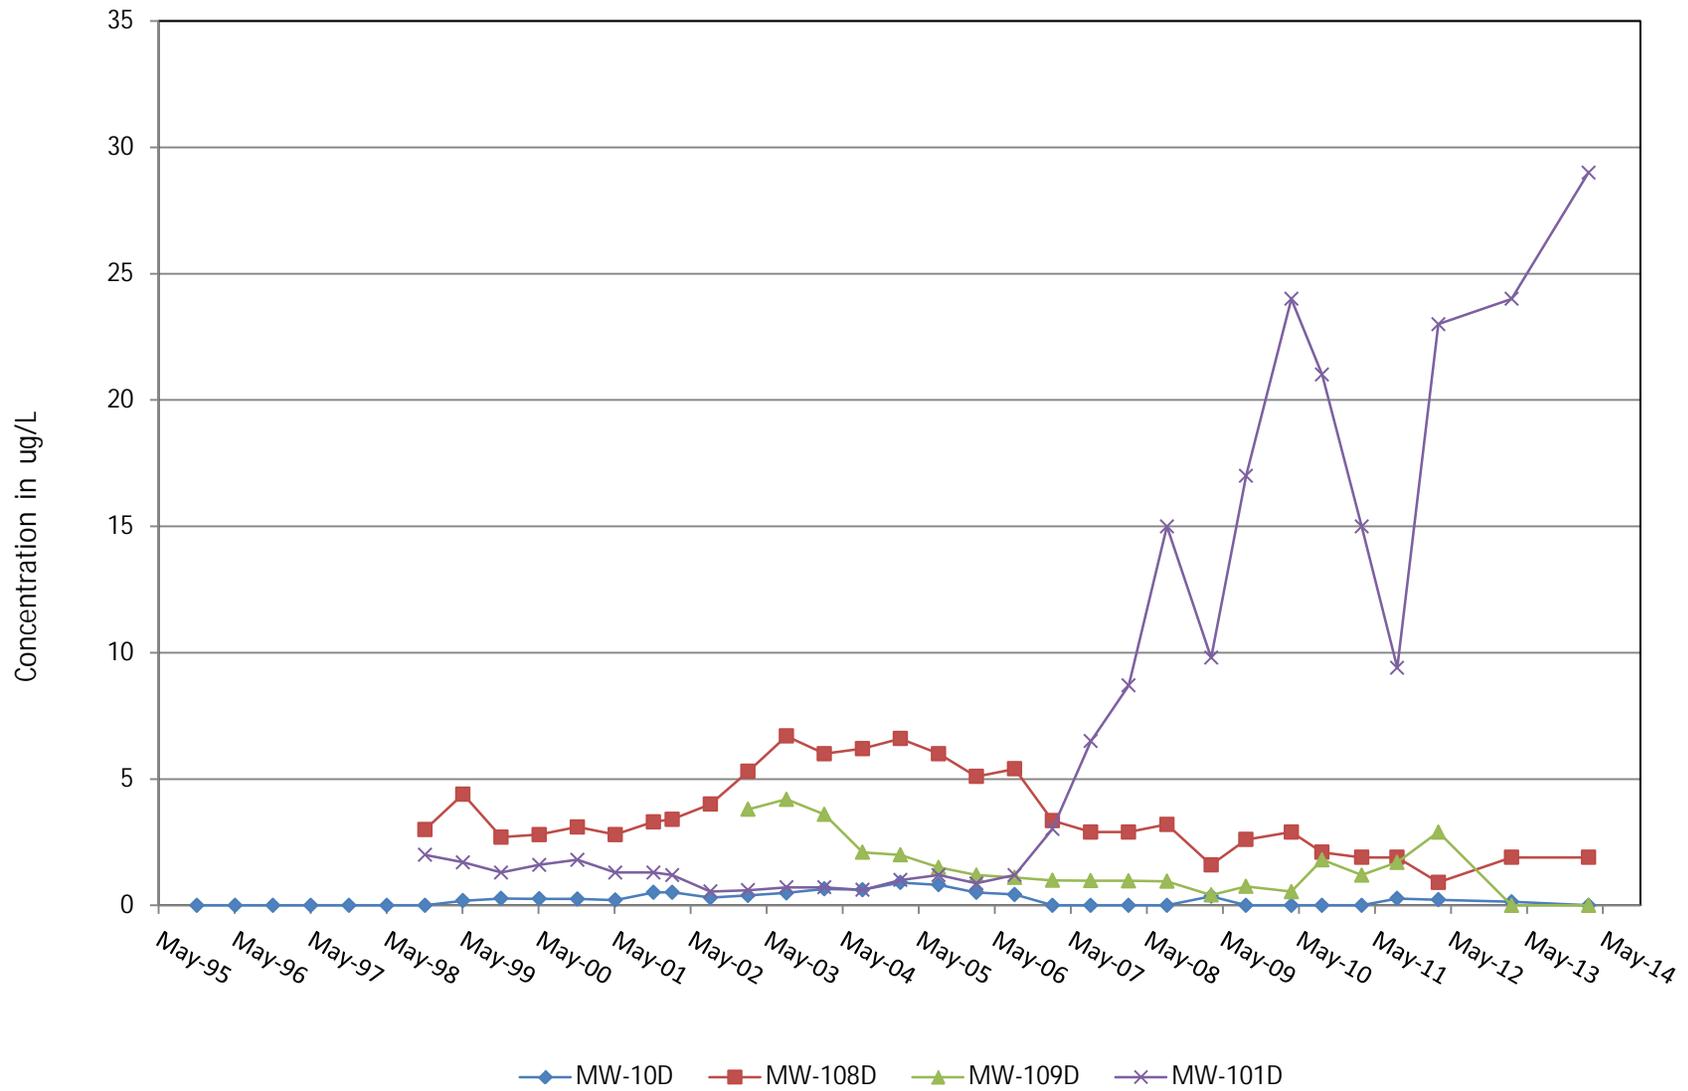

Appendix A

Purge and Sample Records,
Chain of Custody Forms

Appendix B

Aquifer Characteristics and Flow
Regime Data

Table B-1
Groundwater Elevation Comparison, September 2013 - March 2014
FGGM-17 Closed Sanitary Landfill
Fort George G. Meade, Maryland

Groundwater Elevations (msl)			
Well ID	Sep-13	Mar-14	Difference September 2013 to March 2014
Upper Patapsco Aquifer			
MW2S	146.10	147.72	1.62
MW4S	153.86	155.11	1.25
MW5	145.62	146.03	0.41
MW7S	134.86	134.91	0.05
MW8	134.33	134.57	0.24
MW10S	153.58	154.31	0.73
MW12S	151.10	151.80	0.70
MW13S	144.00	144.93	0.93
MW14	146.75	147.74	0.99
MW17	147.74	148.67	0.93
MW18	143.35	144.34	0.99
MW19	147.41	148.35	0.94
MW20	148.81	150.97	2.16
MW105	139.28	139.14	-0.14
MW106	143.62	144.61	0.99
MW107	143.57	144.52	0.95
Lower Patapsco Aquifer			
MW2D	90.33	90.96	-0.63
MW4DR	99.01	99.41	-0.4
MW7D	98.17	98.69	-0.52
MW10D	95.84	96.38	-0.54
MW12D	90.32	90.79	-0.47
MW13D	95.29	95.57	-0.28
MW101D	87.25	87.69	-0.44
MW108D	87.96	88.35	-0.39
MW109D	86.78	87.55	-0.77
MW110D	88.16	88.53	-0.37

Appendix C

QA/QC data

(Provided on CD)

Appendix H

Complete CSL Monitoring
Results, 1994-2014

(Provided on CD)